

Interactive System
インターラクティブシステム特論(2)
Hiroyuki Kajimoto
kajimoto@hc.uec.ac.jp
Twitter ID kajimoto
Hash tag #itsys

Handouts on the web

<http://kaji-lab.jp/ja/index.php?people/kaji/interactive>

–現在は2016年版がおかれています。徐々に変えていきます。
–Temporary, 2016 Japanese version. Will be replaced progressively.

–こちらのpdfには動画のリンク先(Youtube等)が埋め込まれているので、紙資料よりも便利。紙資料は配布せず、講義の1時間前までにアップロードします。必要なら事前にダウンロードしてください

–From next time, lecture handouts will be online 1 hour before the lecture. Print it if necessary.

Schedule

- 4/7 講義(lecture)1
- 4/14 講義(lecture)2
- 4/21 講義(lecture)3
- 4/28 講義(lecture)4
- **5/5 こどもの日**
- **5/12 出張のため休講**
- 5/19 講義(lecture)5
- 5/26 講義(lecture)6
- 6/2 講義(lecture)7
- 6/3(土)オープンラボ研究室見学(任意)
- **6/9 出張のため休講**
- 6/16 講義(lecture)8
- 6/23 講義(lecture)9
- **6/30 出張のため休講**
- 7/7 プレゼンテーション(presentation)1 ([テテルコフ先生セミナー](https://sites.google.com/site/dzmitrysetsukou/))
- 7/14 プレゼンテーション(presentation)2
- 7/21 プレゼンテーション(presentation)3

人間計測手法／Measuring Human



意志から行動までの「どの経路を測るか」で5つの段階
Five layers, from our initial will to our perception.

- 脳活動計測／Measure brain activity.
- 神經・筋活動計測／Measure nerve activity.
- 自律神經系計測／ Measure autonomic nerve related phenomenon.
- 運動計測／Measure motion.
- 心理物理実験／Ask the user ([psychophysics](#))


Psychophysics

- Measure relationship between subjective sensation and physical stimulation.
≒ Measure Human's sensing "ability".
- Important value: "Discrimination threshold"
– Limitation of "difference of two stimuli" ΔP , which is perceptible ex)
 - $P=30g \Rightarrow \Delta P=3g$
 - $P=3kg \Rightarrow \Delta P=300g$
- Weber-Fechner's law (1834)
– **$\Delta P/P = \text{Constant}$**
Can be applied to most sensation.





Weber-Fechner's Law

- $P=P(S)$
 - P: subjective value of sensation
 - S: physical value of stimulation
 - ΔP = subjective "scale" of sensation
- $\Delta P/P = \text{Constant}$
 - Integral of both sides gives $S \propto \log P$
- Conclusion: Our internal "scale" is logarithmic
- ex:
 - Audio's rotary volume

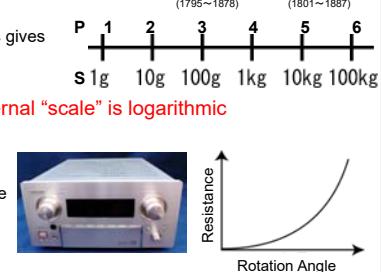

Why Log? = Why not Linear?

Our nerve quantizes the phenomenon by impulses.
When we have only 6 scales...

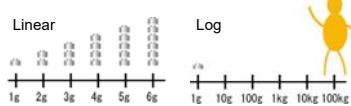

By using Log scale, we can perceive more phenomena.

(ex) CCD cam: 20dB~30dB
Human Eye: 80dB (Can see stars and sun)



Method of Psychophysical experiment

Purposes

- Measure "Discrimination Threshold" (DT), which gives ΔP
- Measure "Point of Subjective Equality" (PSE).
- Perceive two different stimuli as "same".



Discrimination Threshold (DT)
= What is the necessary difference
for discrimination



Point of Subjective Equality (PSE)
= What is the value of left weight, which can
be perceived as "same" as the right weight.

Major Methods:

Method of Adjustment, Method of Limit, Method of Constant

●調整法／Method of Adjustment 被験者が調整する

●極限法／Method of Limit 実験者が調整する


●恒常法／Method of Constant 調整せず回答の確率分布を見る

Easy,
Rough

Time Consuming,
Precise


調整法／Method of Adjustment

カフェオール图形：確かに水平

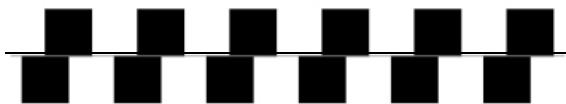


調整法／Method of Adjustment

標準刺激／Standard Stimulus

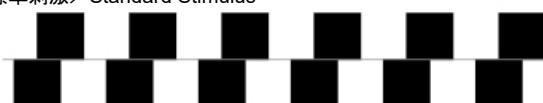

比較刺激／Comparison Stimulus

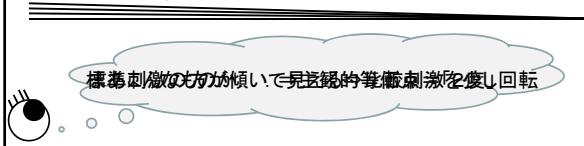


極限法／Method of Limit

ミュラー・リヤー錯視
確かに同じ長さです




極限法／Method of Limit

1. 下降系列／Descending Series

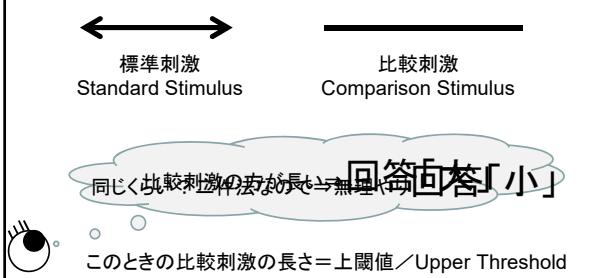


極限法／Method of Limit

2. 上昇系列／Ascending Series

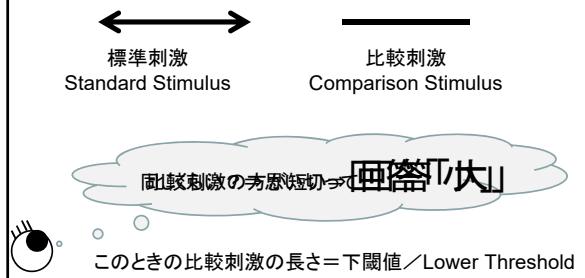

極限法／Method of Limit

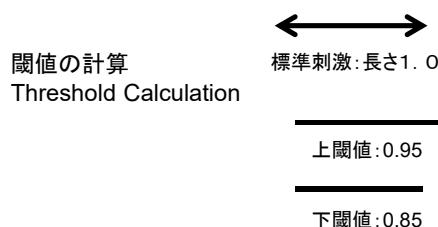


この結果から、


- ・主観的等価点(Point of Subjective Equality)は $(0.85+0.95)/2 = 0.90$
- ・弁別域(Discrimination Threshold)は $(0.95-0.85)/2 = 0.05$

つまり、この「矢印の錯視」によって、
・長さが0.9に縮んで見えること、
・長さの弁別能力が0.05程度であることが分かった。

恒常法／Method of Constant

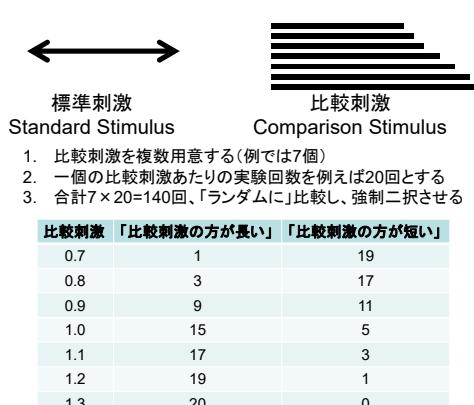

恒常法／Method of Constant

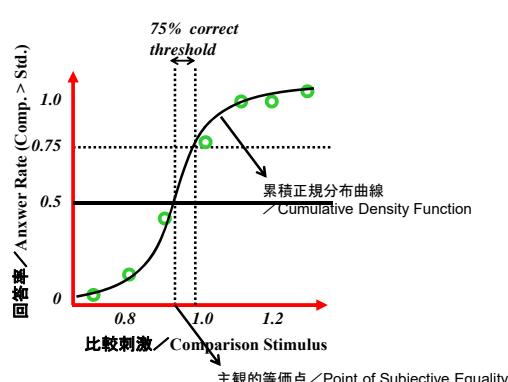

Summary

Measurement of Human perception is necessary for interactive system design.

- 脳活動計測／Measure brain activity.
- 神経・筋活動計測／Measure nerve activity.
- 自律神経系計測／Measure autonomic nerve related phenomenon.
- 運動計測／Measure motion.
- 心理物理実験／Ask the user (psychophysics)




They can be used both as a evaluation tool, and part of an interactive system

Outline of the lecture

1. 人間計測手法／Measuring Human
2. 視覚／Human Vision System
3. 視覚センシング／Visual Sensing
4. 視覚ディスプレイ／Visual Display
5. 聴覚、聴覚インターフェース／Auditory Interface
6. 触覚、触覚インターフェース／Tactile Interface
7. 力覚、力覚インターフェース／Haptic Interface
8. 移動感覚インターフェース／Locomotion Interface




TODAY's TOPIC

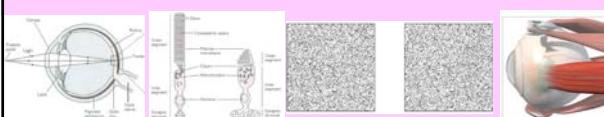


- 目の構造／Eye structure
- 目のセンサ／Eye sensors
- 奥行き知覚／Depth perception
- 眼球運動／Eye movement


眼の構造／Eye Structure

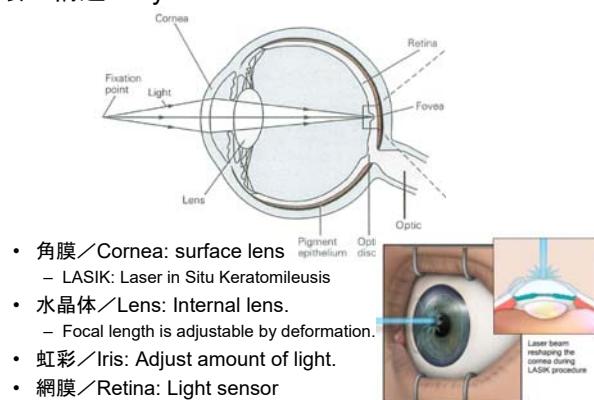

カメラとの比較／Comparison with Camera

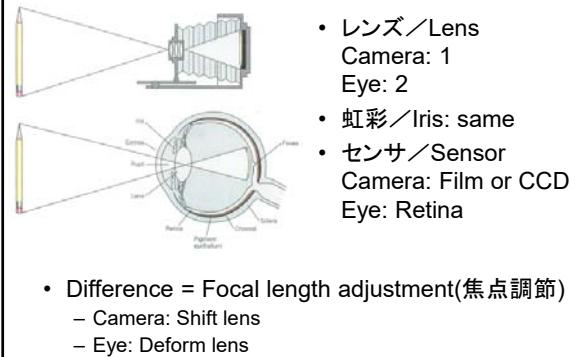

網膜／Retina = Optical Sensor

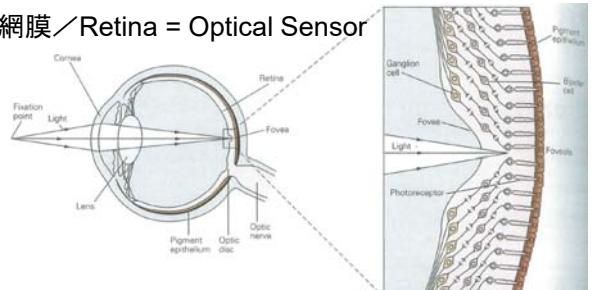


- 中心窩／Fovea: Center of vision. Very high spatial resolution.
- Optic nerve: Nerve from retina to brain.
Optic nerve is **in front of** the retina. (transparent)
- 盲点／Optic disc (blind spot): Hole that optic nerve axons exit.

盲点／Blind Spot




- Close your right eye, and gaze '+' with your left eye.
- Move the paper back and forth, and find '●' disappears.
- You also find the line connected.

TODAY's TOPIC

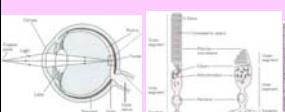

- 目の構造／Eye structure
- 目のセンサ／Eye sensors
- 奥行き知覚／Depth perception
- 眼球運動／Eye movement


網膜の視細胞／Optic cells in the retina

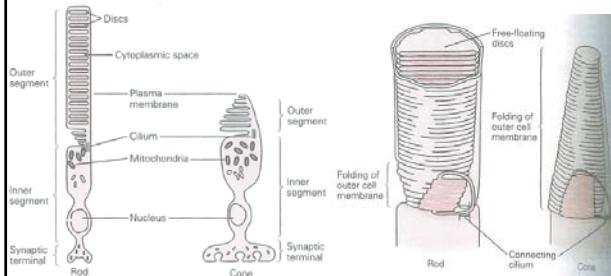

- Rod Cell (棹体細胞) and Cone Cell (錐体細胞)
 - Light to electric conversion is done at outer segment.
 - Channels composed of protein is opened by the light.
 - Rod cell has longer outer segment.


桿体細胞／Rod cell

- Black and White sensor.
- Plays major role when dark
- High sensitivity (x100 cone cell)
 - Can capture single photon
- One eye has 130,000,000 cells.
- Slow response.

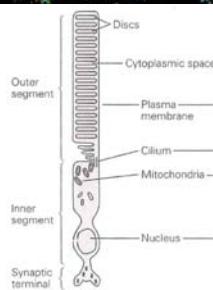


錐体細胞／Cone cell

- Color sensing
 - Three types (L,M,S)
 - Caused by different proteins in the channel.
- Play major role when bright.
- Has lower sensitivity.
- One eye has 7,000,000.
- Clustered at fovea (中心窩).
- Fast Response.

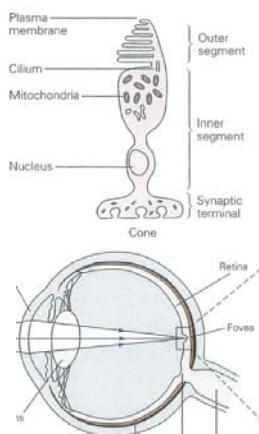

桿体細胞・錐体細胞／Rod cell & Cone cell

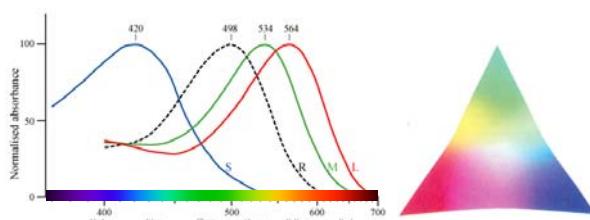





- Rod cell: black & white sensor. center = 498nm.
Green Laser Pointer is the best for presentation.
- Cone cell: Three types
S: 420nm, M: 534nm, L: 564nm
Color perception is based on the combination of the three.

色知覚メカニズム／Brain color perception ≠ R,G,B


Take **differentials** and compose another 3 axis.

- L+M(+S) (Brightness)
- M-L (Red-Green axis)
- S-(L+M) (Blue-Yellow axis)

- They are the basis of "complementary color" (補色)
 - there is no such thing as "reddish green"

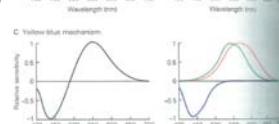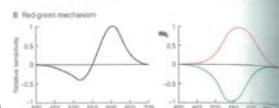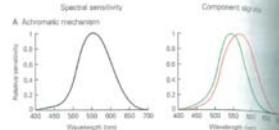

桿体・錐体の分布／Distribution of the cells.

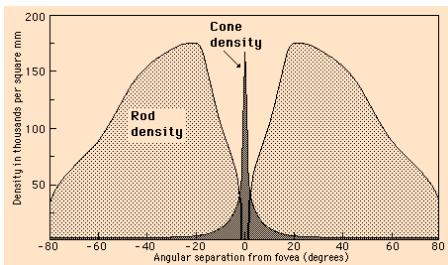

- Cone cell = central vision (中心視)
 - ✓ Peripheral vision is almost color blind
- Rod cell = peripheral vision (周辺視)
 - ✓ You can see stars better by peripheral vision




周辺視野への情報表示(1)




- 周辺視野への表示は環境に覆われている事、すなわち臨場感を表示するためには不可欠
- 周辺視野のほうが時間的解像度は高い⇒運動表示

周辺視野への情報表示(1)

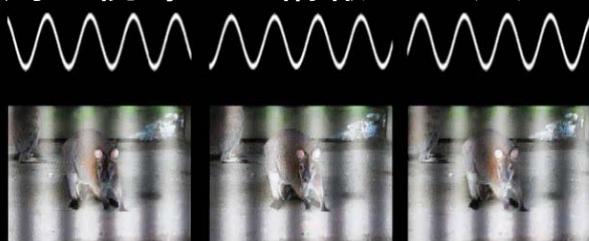

We prepare three luminance wave patterns,
each of which have a different phase lag.
Y. Okano, S. Fukushima, M. Furukawa, H. Kajimoto, "Embedded Motion",
SIGGRAPH Asia 2010, Poster, Korea.

周辺視野への情報表示(2) IllumiRoom

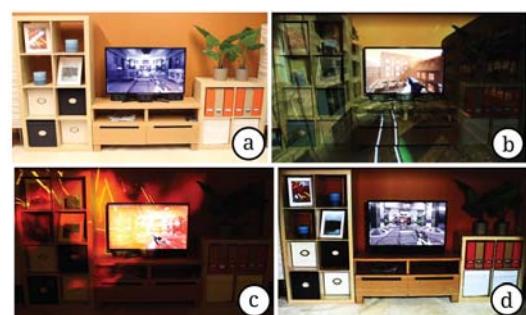

Brett R. Jones: IllumiRoom: Peripheral Projected Illusions for Interactive Experiences, CHI2013

<http://www.youtube.com/watch?v=re1EaGRV0w>

色知覚は空間解像度が低い
Color process has very low resolution

Flowers



Black & white



Color only




RGB and YCbCr(YUV)


RGB: corresponds to 3 cone cells.

Mathematics tells us...
ANY 3 independent vectors can be "basis vectors"
(orthogonality not required)

RGB = One type of 3 independent vectors.
There are infinite ways.

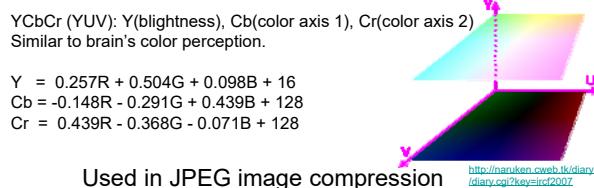


色盲／Color blindness

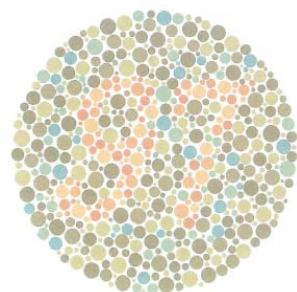


- One to three types of cone cells lacks.

網膜での情報処理／Retinal image processing

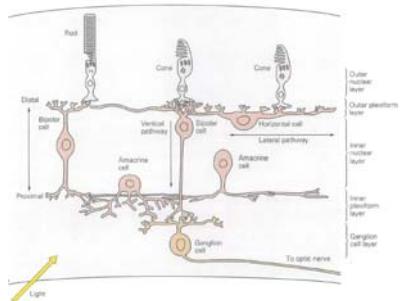


- Sensors: About 200,000,000 / eye
- Nerve axons to the brain: about 1,000,000 / eye
- Retinal image process: 200 cells \Rightarrow 1 output



Key to the retinal process: "Mach belt" illusion

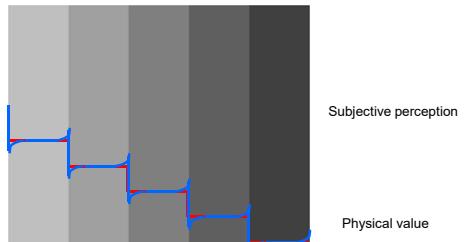



側抑制／Lateral inhibition (1/3)

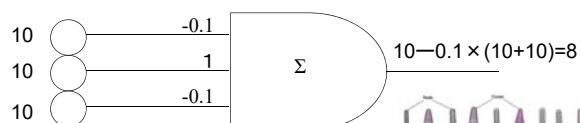


- Synaptic calculation
- Central input: +(plus)
- Surrounding input: -(minus)

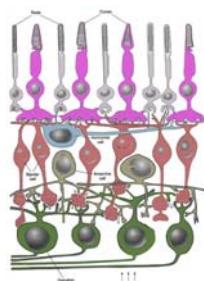


側抑制／Lateral inhibition (2/3)

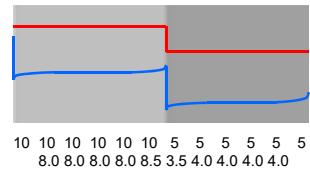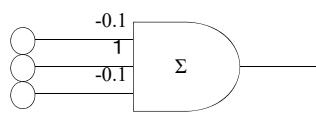


側抑制／Lateral inhibition(3/3):
Harman grid illusion

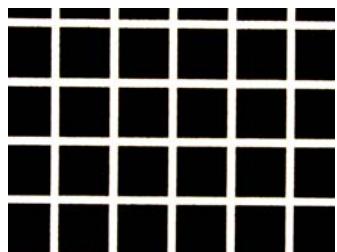

- (1) 周辺視／peripheral vision: the cross point becomes dark, due to lateral inhibition
- (2) 中心視／central vision: No such effect
⇒ The peripheral vision "compress" larger field.

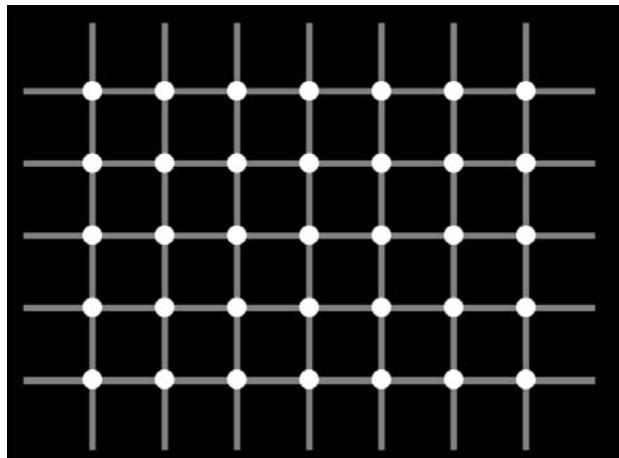

TODAY's TOPIC

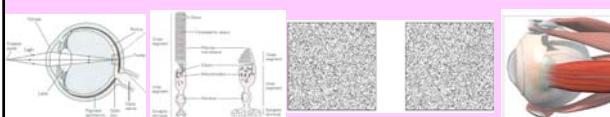

- 目の構造／Eye structure
- 目のセンサ／Eye sensors
- 奥行き知覚／Depth perception
- 眼球運動／Eye movement

奥行き知覚の鍵／Depth perception cues

- 単眼性／With single eye
 - 経験／Experience
 - 焦点調節／Accommodation
 - 運動視差／Motion Parallax



- 両眼性／With two eyes
 - 軸輳角／Vergence eye movement
 - 両眼視差／Binocular disparity




Depth cue(1) 経験／Experience




- 重なり(遮蔽)／Occlusion
 - Occluded (shielded) objects are more distant than occluding (shielding) objects.
- 遠近法／Perspective
 - Near= Large, Bottom, Clear
 - Far = Small, Top, Blur
- 記憶／Memory
 - Knows the physical size

Depth cue(2) 焦点調節／Accommodation: Changing the power of the lens

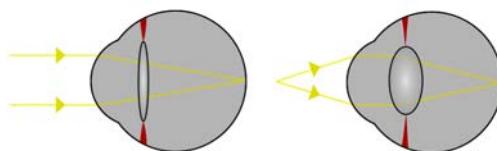


- Automatic focus adjustment by lens deformation
- The adjustment itself works as depth cue.
 - works at close range.

Depth cue(3) 運動視差／Motion Parallax



- When the head moves...
 - Near: Moves in the opposite direction.
 - Far: Does not move, or moves in the same direction.

Depth cue(4) 輻輳／Vergence eye movement




- The eyes converge (move inward) and diverge (move outward) by distance.

輻輳 - 調節矛盾の問題 Vergence-accommodation conflicts




- Accommodation & vergence are slightly coupled.
- Stereo display problem:
 - Accommodation=constant
 - Vergence = variable


⇒ Severe Fatigue

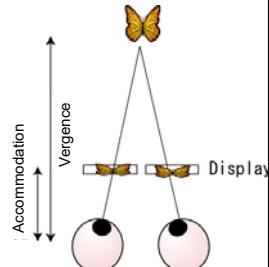



輻輳 - 調節矛盾の許容範囲 Tolerance of vergence-accommodation conflicts



(ex) Display with 50cm away from the eyes:
25cm to 1m virtual object can be displayed.

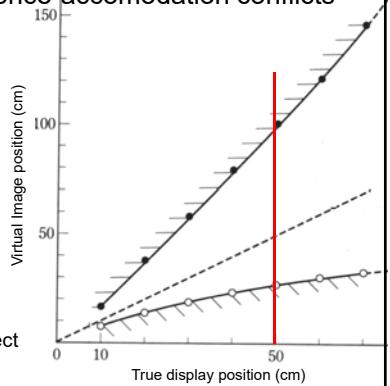

Depth cue(5) 両眼視差／Binocular disparity


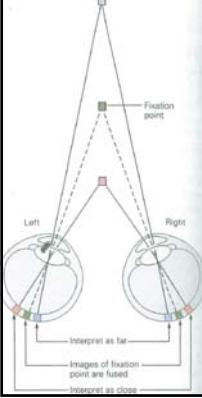


- Disparity = image shift
 - Vergence: single point.
 - Binocular disparity: whole field of view.
- Most important for VR system

Stereogram





ランダムドット・ステレオグラム Random dot stereogram (RDS)

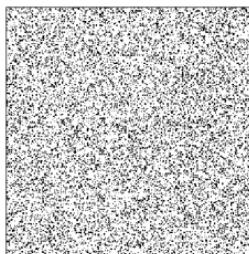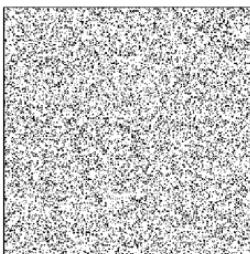

- Proof of "pure disparity can be distance cue".
Before the RDS, "experience" was thought to play major role.
- Found and used during Vietnam War.




TODAY's TOPIC

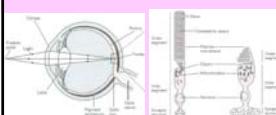

- 目の構造／Eye structure
- 目のセンサ／Eye sensors
- 奥行き知覚／Depth perception
- 眼球運動／Eye movement

Eye movement

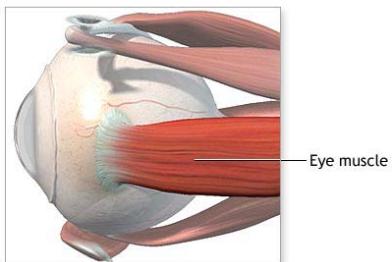


- 6 muscles (3 pairs) rotate eyes.

Eye movement: 入力手段として／As an Interface

先を読む頭脳

羽生善治 伊藤毅志
松原仁



How to measure Eye movement



- アナログ測定／Analog measurement
 - コンタクトレンズ／Contact Lens
 - 眼底電位／Electrooculography
 - 強膜反射／Limbus Tracking Method
- 画像処理／Computer Vision
 - パッシブ・アクティブな方法／Passive・Active Methods


コンタクトレンズ／Contact Lens

- カイモグラフ(Kymograph)



- バリエーション


- オプティカル・レバー法
コンタクトレンズに微小ミラー装着
- サーチコイル法
コンタクトレンズにコイルを埋込

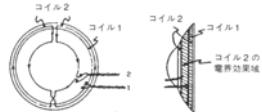

眼底電位


Electrooculography, EOG

- Horny coat(角膜) has ~1mV positive voltage to Retina(網膜)
- Electrodes(電極) around eyes.
⇒ Measured voltage is proportional to eye rotation.
- Has wide range (velocity, frequency)
- Accuracy not so good (1 deg~)

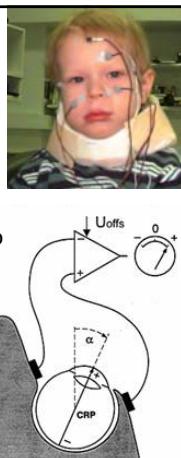


強膜反射／Limbus Tracking Method

- Emit IR light to the eye, measure reflected light.
黒目と白目の境界に赤外線照射。反射光計測
- Received light: White part > Black part.
- Good for horizontal eye motion.

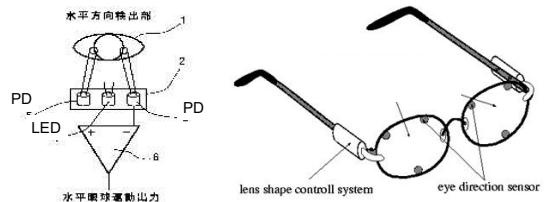



Computer Vision

- Capture eye image.
- By image processing (pattern matching), eye center is calculated.
- Refresh rate = video rate.

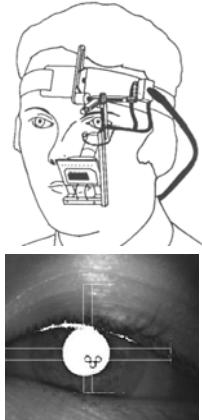


角膜反射／Reflection at Horn Coat

- 点光源の角膜照射時に現れる角膜反射像(ブルキニ工像)から眼球運動を計測
- ビデオカメラで撮影⇒画像処理
- 瞳孔中心との相対位置を使う

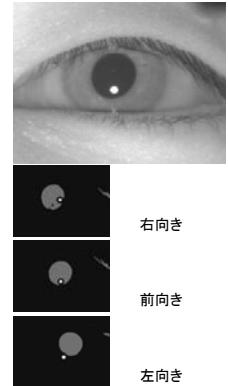


赤目現象の利用／Red-eye Effect

- 目のレンズによる再帰性反射で網膜の色(血管)が反射する現象。光源に返ってくる
- 光源を2種類(同軸上か否か)用意すれば差分画像として瞳孔だけ検出可能

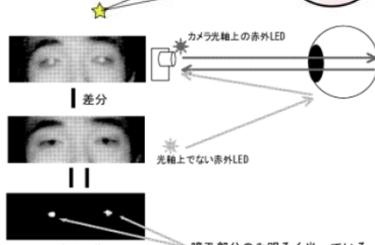

眼球運動の種類／Eye movements

- スムーズパースト(滑動性眼球運動)／Smooth Pursuit
 - Follow slow movement of small dots. Voluntary (conscious)
- サッケード(跳躍性眼球運動)／Saccade
 - Stepwise movement
 - Motion start is voluntary and involuntary.
 - During motion,
 - You cannot stop (involuntary)
 - Visual acuity drops.
- 固視微動／Miniature eye movement
 - Very small vibration. 30~100Hz.
 - Refresh the image on the retina.
 - Anesthetisation of muscles⇒No visual image.

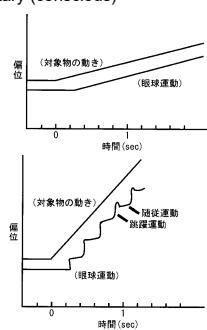

安定化のための反射としての眼球運動 Eye movement for stabilization

- 前庭動眼反射／Vestibulo-ocular reflex(VOR)
– Cancel head rotation.
-
- 視運動性眼球運動／Optokinetic Response(OKR)
– When the whole visual field moves, the eye follows.
-


参考:Chicken Head Tracking - Smarter Every Day



http://www.youtube.com/watch?v=_dPlkFPowCc

TODAY's SUMMARY

- 眼の構造／Eye structure
– conea, retina, fovia, blind spot
- 眼のセンサ／Eye sensors
– rod cell, cone cell, color vision
– peripheral & central vision
– image processing
- 奥行き知覚／Depth perception
– accommodation, vergence
– binocular disparity
- 眼球運動／Eye movement
– smooth pursuit, saccade,
– VOR, OKR

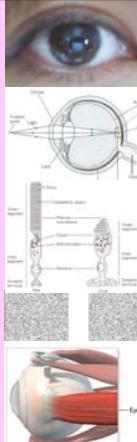

小テスト／Mini Test 次回開始までに提出

<https://qoo.gl/forms/85xfExX2mLheNncR2>

以下の全てに100字以内程度で解答せよ／Answer all questions within 50 words

- ウェバー・フェヒナーの法則について説明せよ Explain Weber-Fechner's law
- 調整法について説明せよ Explain the method of adjustment.
- 極限法について説明せよ Explain the method of limit.
- 恒常法について説明せよ Explain the method of constant.
- 錐体細胞と桿体細胞の分布の違いについて述べよ Describe difference of distribution of cone cell and rod cell.
- 錐体細胞と桿体細胞の明暗および色感受性の違いについて述べよ Describe difference of color and brightness perception of cone cell and rod cell.
- 焦点調節について説明せよ Explain Accommodation
- 運動視差について説明せよ Explain Motion Parallax
- 輻辏について説明せよ Explain Vergence Eye Movement
- 輻辏調節矛盾について説明せよ Explain Vergence-Accommodation Conflict
- 両眼視差について説明せよ Explain Binocular Disparity
- 前庭動眼反射について説明せよ Explain Vestibulo-ocular reflex(VOR)
- 視運動性眼球運動について説明せよ Explain Optokinetic Response(OKR)
- 眼底電位計測について説明せよ Explain Electroculography (EOG)
- 強膜反射法について説明せよ Explain Limbus Tracking Method
- 角膜反射法について説明せよ Explain Eye Capture System Using Reflection at