

# Interactive System

## インターラクティブ システム特論 (2)

Hiroyuki Kajimoto  
[kajimoto@uec.ac.jp](mailto:kajimoto@uec.ac.jp)  
Twitter kajimoto



# 人間計測手法／Measuring Human



意志から行動までの「どの経路を測るか」で5つの段階  
Five layers, *from our initial will to our perception.*

- 脳活動計測／Measure **brain activity**.
- 神経・筋活動計測／Measure **nerve activity**.
- 自律神経系計測／Measure **autonomic nerve** related phenomenon.
- 運動計測／Measure **motion**.
- 心理物理実験／Ask the user (**psychophysics**)



# Psychophysics

- Measure relationship between subjective sensation and physical stimulation.  
     $\doteq$  Measure Human's sensing "ability".
- Important value: "Discrimination threshold"
  - Limitation of "difference of two stimuli"  **$\Delta P$** , which is perceptible  
ex)
    - $P=30g \Rightarrow \Delta P=3g$
    - $P=3kg \Rightarrow \Delta P=300g$
- Weber-Fechner's law (1834)
  - **$\Delta P/P = \text{Constant}$**   
Can be applied to most sensation.




# Weber-Fechner's Law


- $P=P(S)$ 
  - P: subjective value of sensation
  - S: physical value of stimulation
  - $\Delta P$  = subjective “scale” of sensation
- $\Delta P/P = \text{Constant}$ 
  - Integral of both sides gives  
 **$S \propto \log P$**



Weber  
(1795~1878)

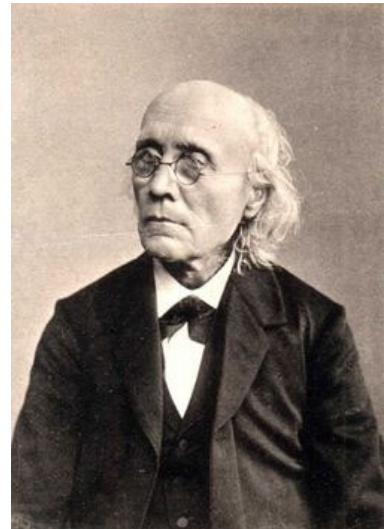


Fechner  
(1801~1887)

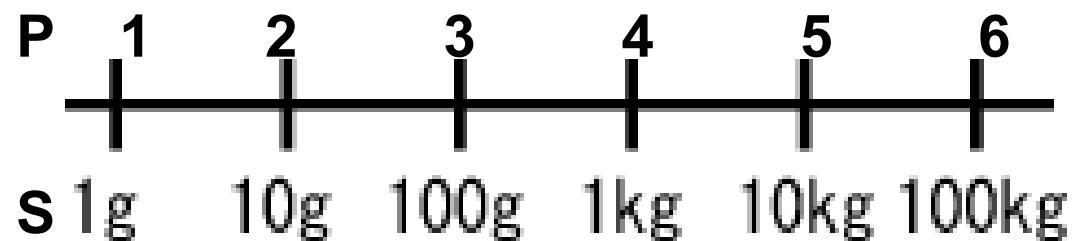




- Conclusion: Our internal “scale” is logarithmic

- ex:
  - Audio’s rotary volume

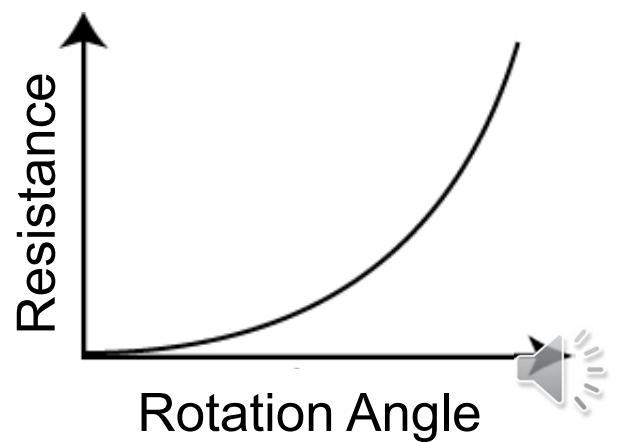

# Why Log? = Why not Linear?

Our nerve quantizes the phenomenon by impulses.  
When we have only 6 scales...

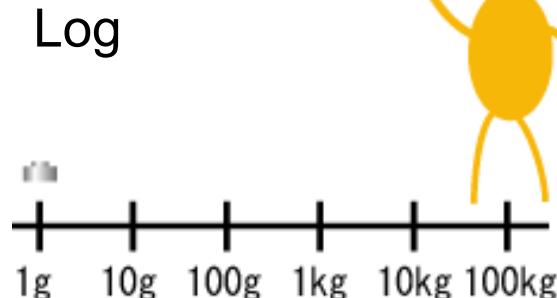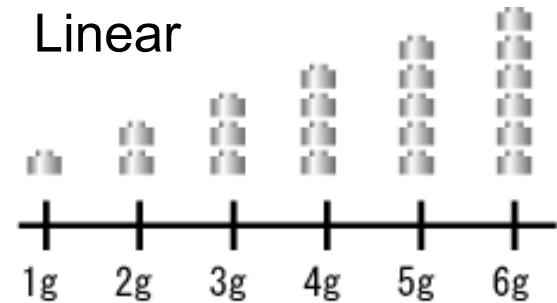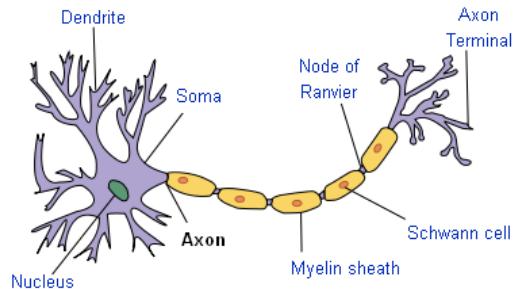

By using Log scale, we can perceive more phenomena.

(ex) CCD cam: 20dB~30dB  
Huma Eye: 80dB (Can see stars and sun)




# Method of Psychophysical experiment

## Purposes

- Measure “Discrimination Threshold” (DT), which gives  $\Delta P$
- Measure “Point of Subjective Equality” (PSE).
  - Perceive two different stimuli as “same”.



Discrimination Threshold (DT)  
= What is the necessary difference  
**for discrimination**

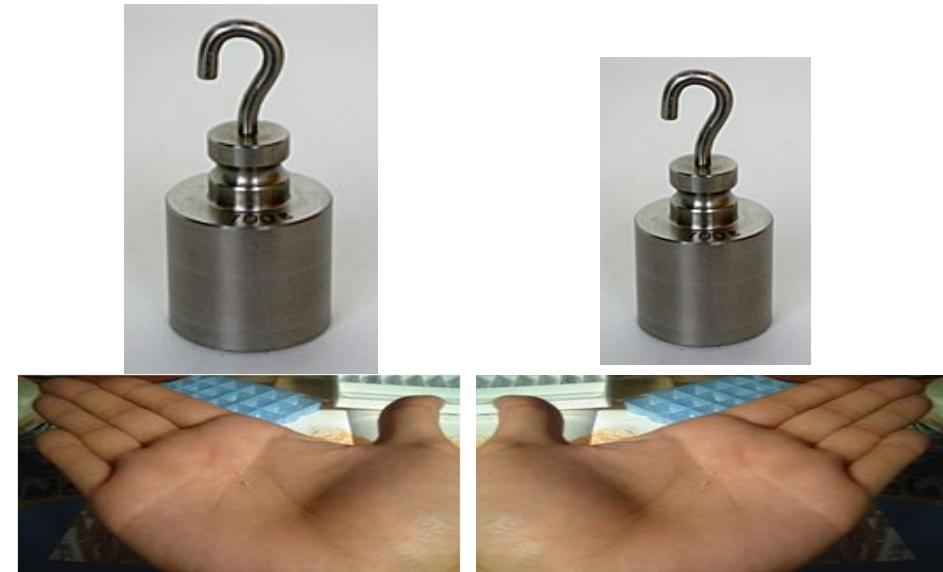

Point of Subjective Equality (PSE)  
= What is the value of left weight, which can  
be perceived as “same” as the right weight.


Major Methods:

**Method of Adjustment, Method of Limit, Method of Constant**

## ● 調整法／Method of Adjustment

被験者が調整する

Easy,  
Rough

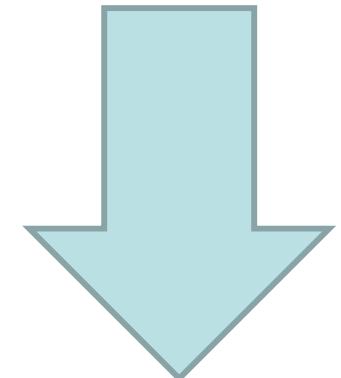

## ● 極限法／Method of Limit

実験者が調整する

## ● 恒常法／Method of Constant


調整せず回答の確率分布を見る

Time Consuming,  
Precise




# 調整法／Method of Adjustment

カフェウォール図形：確かに水平

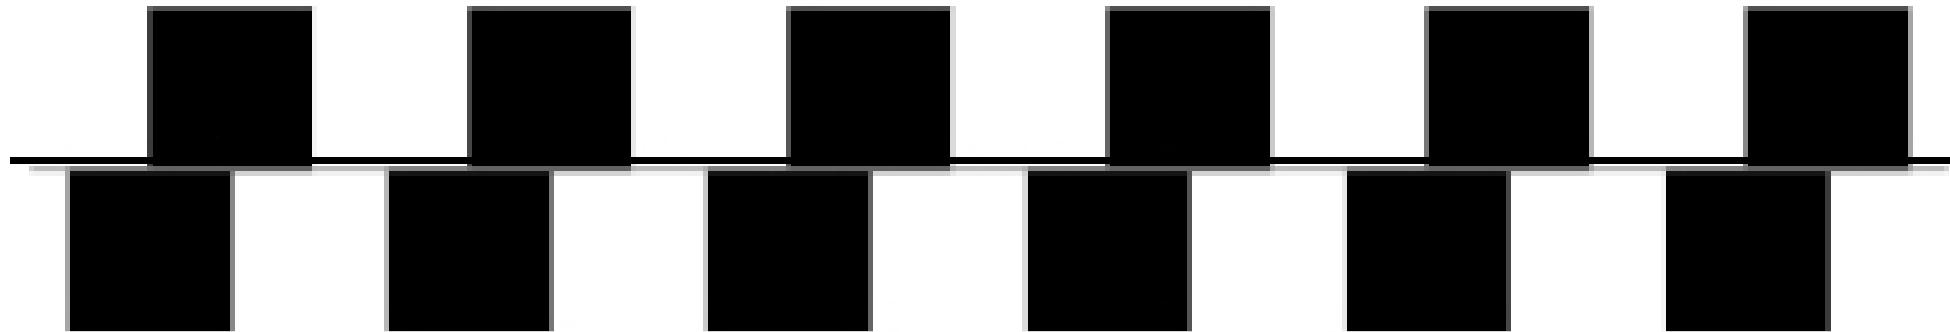


# 調整法／Method of Adjustment

## 標準刺激／Standard Stimulus

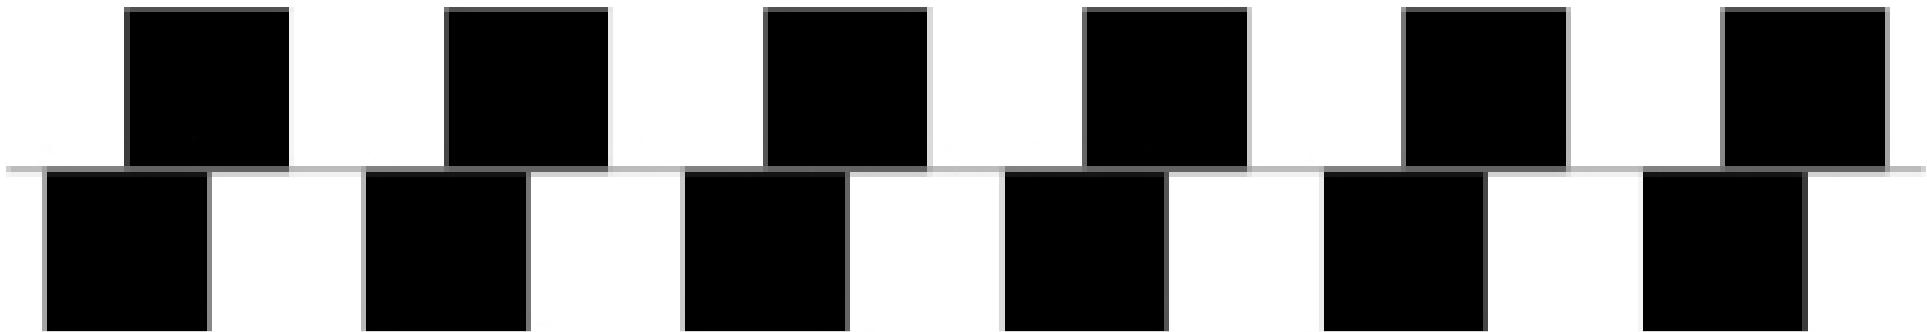

## 比較刺激／Comparison Stimulus

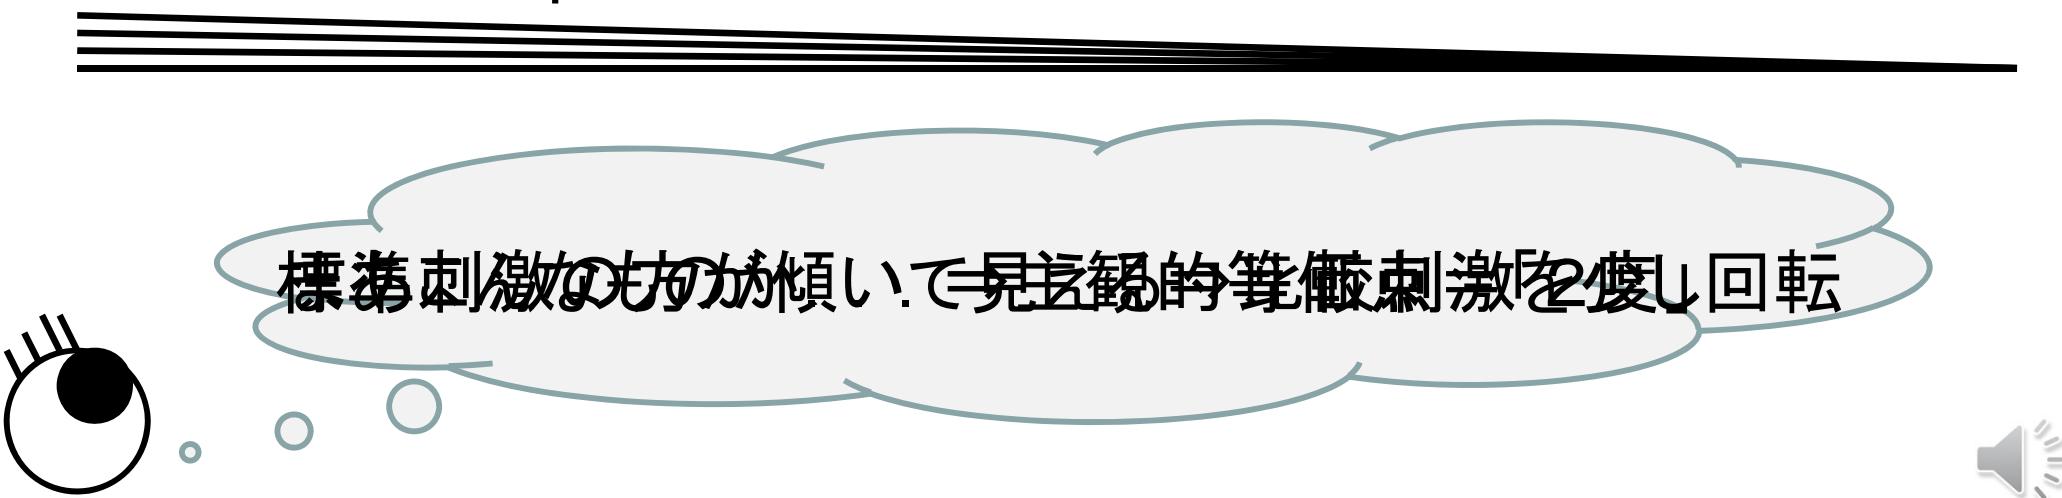

# 極限法／Method of Limit

ミュラー・リヤー錯視  
確かに同じ長さです




# 極限法／Method of Limit

## 1. 下降系列／Descending Series



同じく比較刺激の方が長い→無理矢理回答「小」



このときの比較刺激の長さ=上閾値／Upper Threshold



# 極限法／Method of Limit

## 2. 上昇系列／Ascending Series



標準刺激


Standard Stimulus

比較刺激

Comparison Stimulus

回答「大」

比較刺激の方が短切れ



このときの比較刺激の長さ = 下閾値／Lower Threshold



# 極限法／Method of Limit



閾値の計算

標準刺激：長さ1.0

Threshold Calculation

---

上閾値：0.95

---

下閾値：0.85

この結果から、


- 主観的等価点(Point of Subjective Equality)は $(0.85+0.95)/2 = 0.90$
- 弁別域(Discrimination Threshold)は $(0.95-0.85)/2 = 0.05$

つまり、この「矢印の錯視」によって、

- 長さが0.9に縮んで見えること、
- 長さの弁別能力が0.05程度であることが分かった。



# 恒常法／Method of Constant

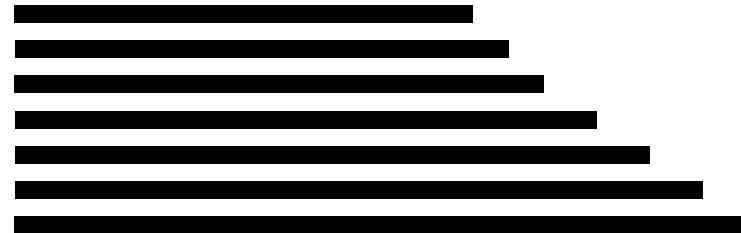

標準刺激

Standard Stimulus

比較刺激


Comparison Stimulus

1. 比較刺激を複数用意する(例では7個)
2. 一個の比較刺激あたりの実験回数を例えば20回とする
3. 合計 $7 \times 20 = 140$ 回、「ランダムに」比較し、強制二択させる

比較刺激	「比較刺激の方が長い」	「比較刺激の方が短い」
0.7	1	19
0.8	3	17
0.9	9	11
1.0	15	5
1.1	17	3
1.2	19	1
1.3	20	0



# 恒常法／Method of Constant

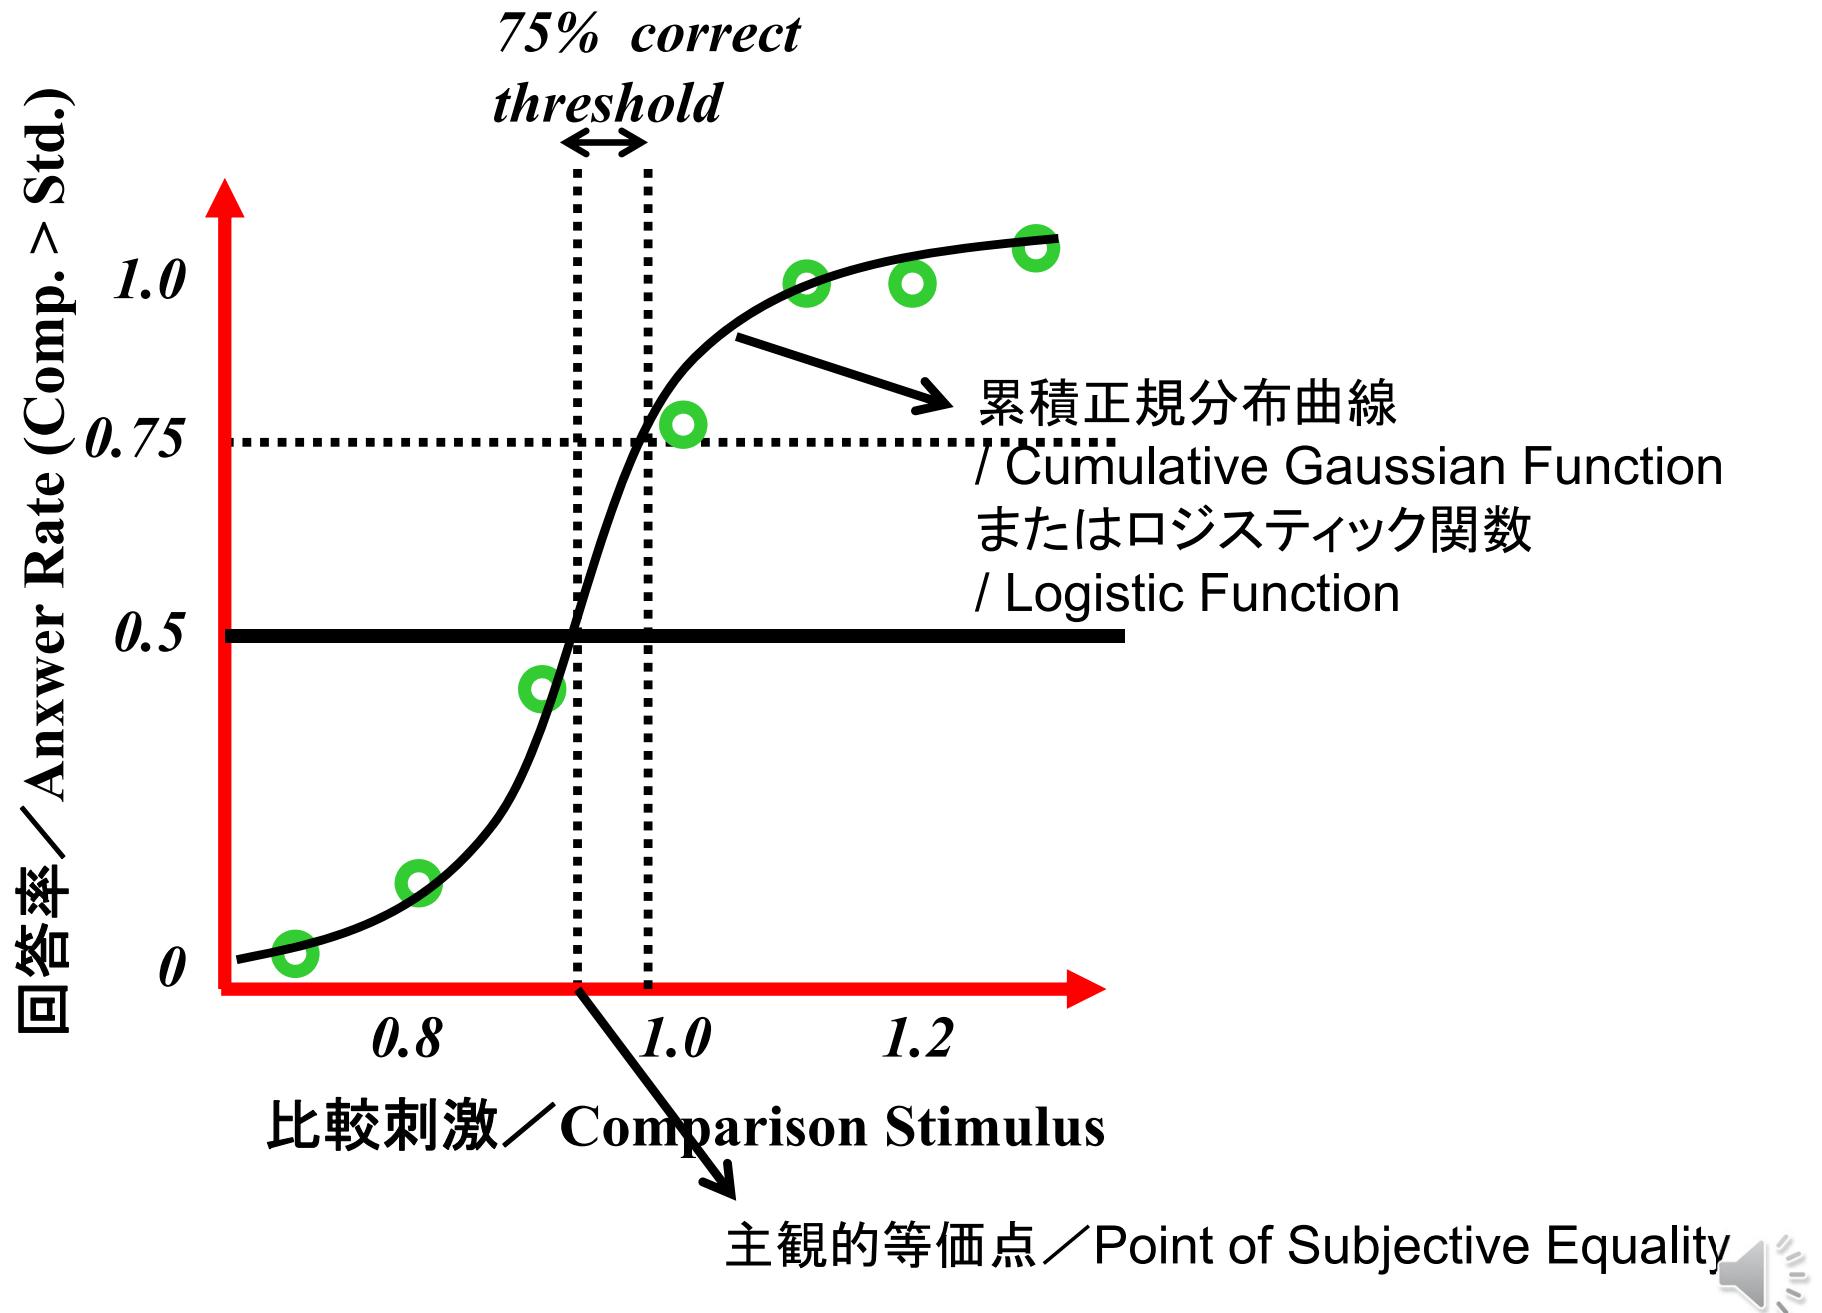

# Summary


Measurement of Human perception is necessary for interactive system design.

- 脳活動計測／Measure **brain activity**.
- 神経・筋活動計測／Measure **nerve activity**.
- 自律神経系計測／ Measure **autonomic nerve related phenomenon**.
- 運動計測／Measure **motion**.
- 心理物理実験／Ask the user (**psychophysics**)








They can be used both as a **evaluation tool**, and part of an **interactive system**

# Outline of the lecture

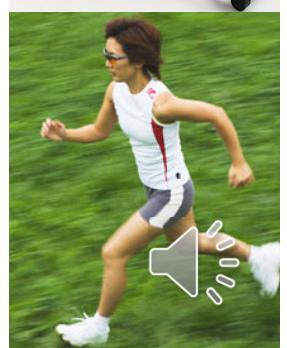

1. 人間計測手法／Measuring Human
2. 視覚／Human Vision System
3. 視覚センシング／Visual Sensing
4. 視覚ディスプレイ／Visual Display
5. 聴覚、聴覚インターフェース／Auditory Interface
6. 触覚、触覚インターフェース／Tactile Interface
7. 力覚、力覚インターフェース／Haptic Interface
8. 移動感覚インターフェース／Locomotion Interface


# TODAY's TOPIC

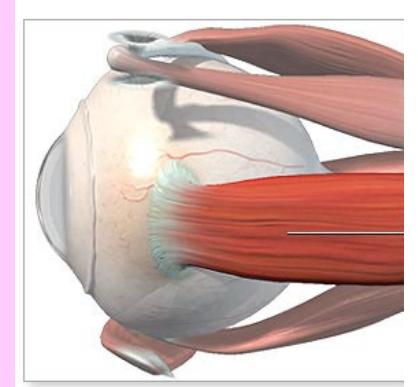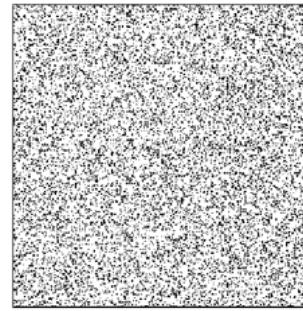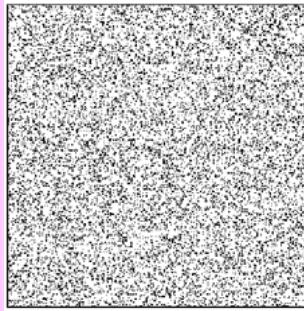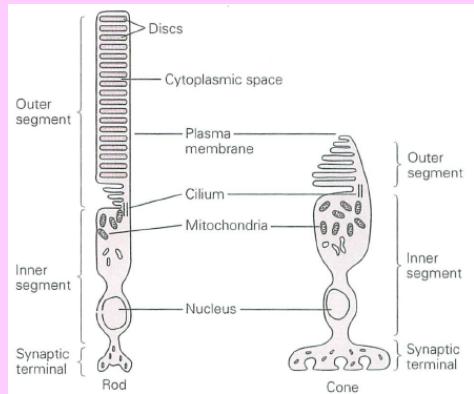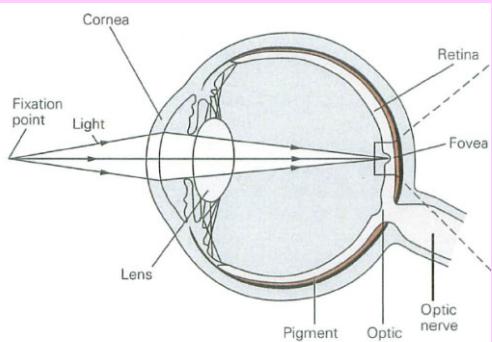

- 目の構造／Eye structure
- 目のセンサ／Eye sensors
- 奥行き知覚／Depth perception
- 眼球運動／Eye movement



# 眼の構造／Eye Structure

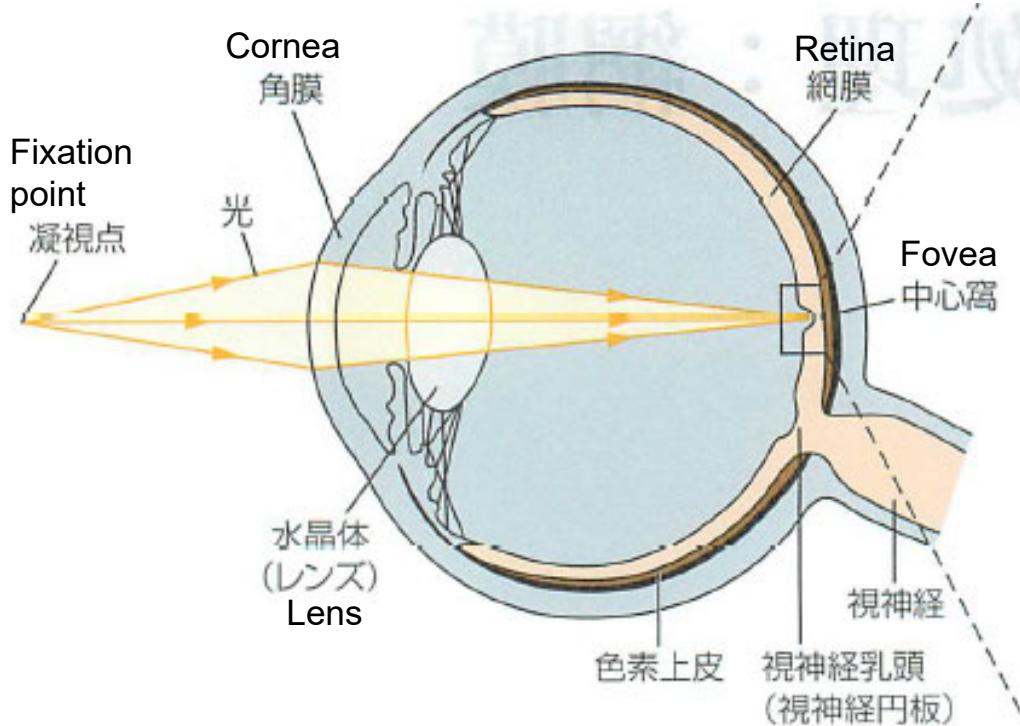


カンデル神経科学(Principles of Neural Science)  
<https://www.medsi.co.jp/kandel/sousai/index.html>

- 角膜／Cornea: surface lens
  - LASIK: Laser in Situ Keratomileusis
- 水晶体／Lens: Internal lens.
  - Focal length is adjustable by deformation.
- 虹彩／Iris: Adjust amount of light.
- 網膜／Retina: Light sensor



Lasik (Wikipedia)  
<https://en.wikipedia.org/wiki/LASIK>

# カメラとの比較／Comparison with Camera

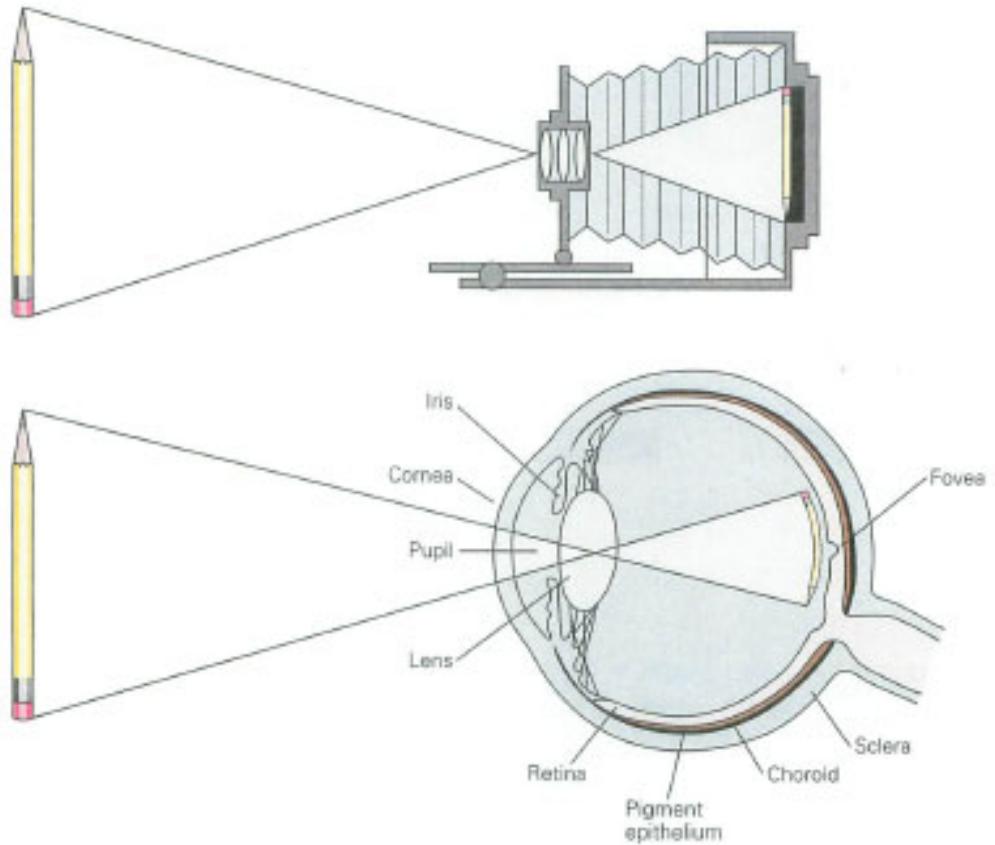


- レンズ／Lens  
Camera: 1  
Eye: 2
- 虹彩／Iris: same
- センサ／Sensor  
Camera: Film or CCD  
Eye: Retina
- One apparent difference = Focal length adjustment(焦点調節)
  - Camera: Shift lens
  - Eye: Deform lens



# 網膜／Retina = Optical Sensor

カンデル神経科学(Principles of Neural Science)  
<https://www.medsi.co.jp/kandel/syousai/index.html>

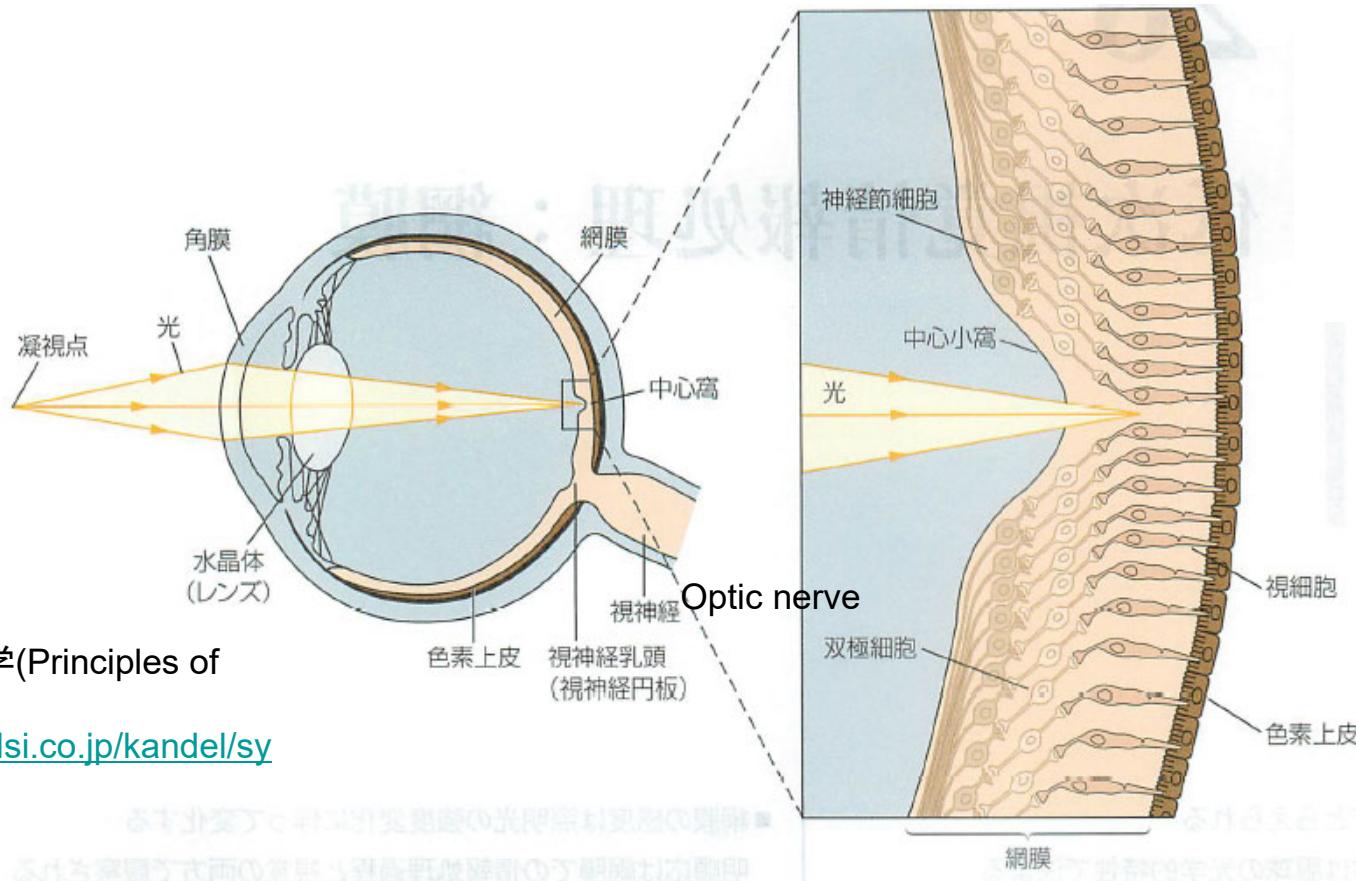



- 中心窩／Fovea: Center of vision. Very high spatial resolution.

- Optic nerve: Nerve from retina to brain.

Optic nerve is **in front of** the retina. (transparent)






- 盲点／Optic disc (blind spot): Hole that optic nerve axons exit.

# 盲点／Blind Spot



- Close your right eye, and gaze ‘+’ with your left eye.
- Move the paper back and forth, and find 


# TODAY's TOPIC

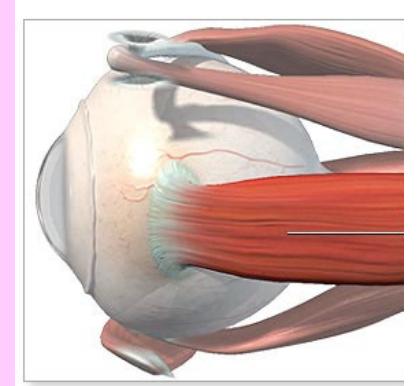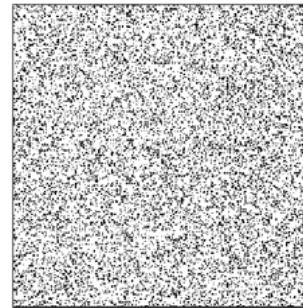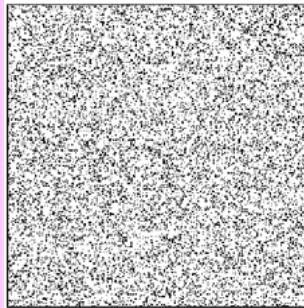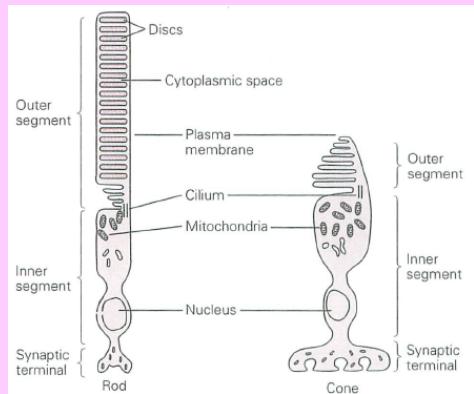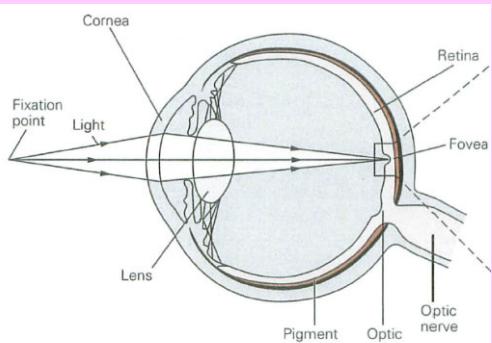

- 目の構造／Eye structure
- 目のセンサ／Eye sensors
- 奥行き知覚／Depth perception
- 眼球運動／Eye movement



# 網膜の視細胞／Optic cells in the retina

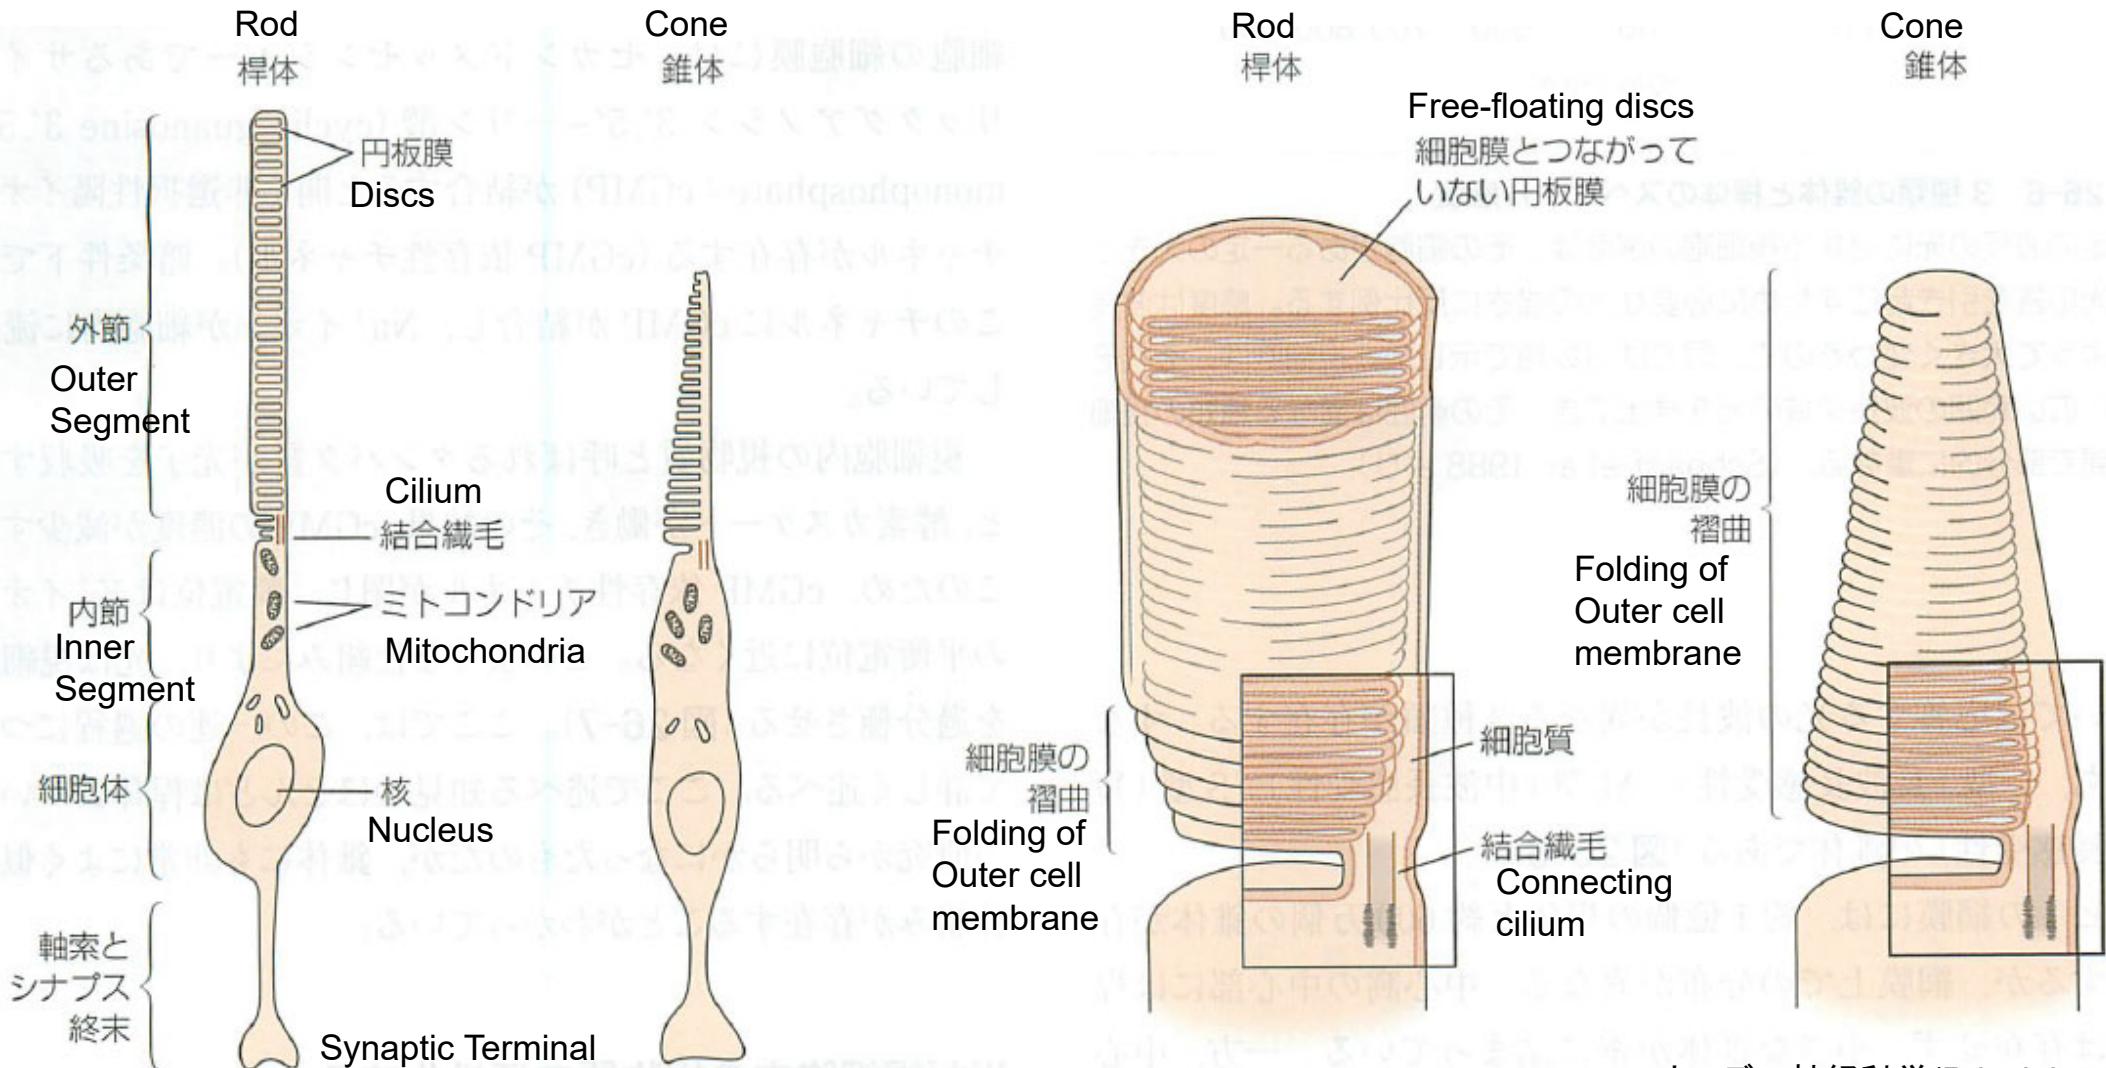


- Rod Cell (棹体細胞) and Cone Cell (錐体細胞)
  - Light to electric conversion is done at outer segment.
  - Channels composed of protein is opened by the light.
  - Rod cell has longer outer segment.

カンデル神経科学(Principles of Neural Science)  
<https://www.medis.co.jp/kandel/syousai/index.html>





# 桿體細胞／Rod cell

- Black and White sensor.
- Plays major role when dark
- High sensitivity (x100 cone cell)
  - Can capture single photon
- One eye has 130,000,000 cells.
- Slow response.

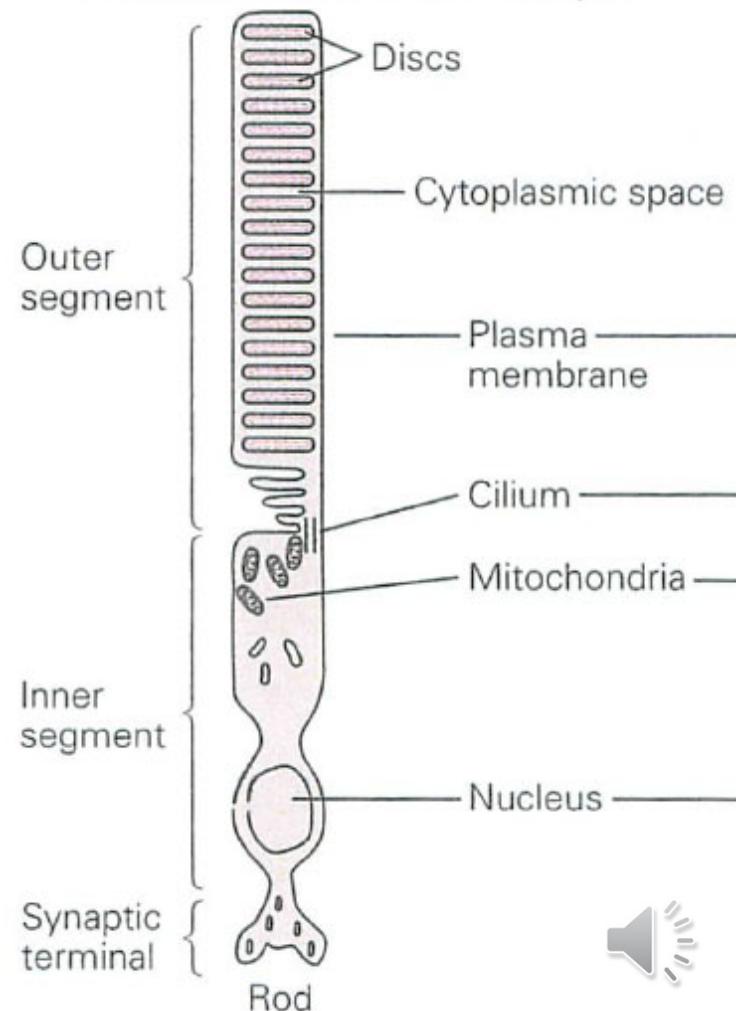


# 錐體細胞／Cone cell

- Color sensing
  - Three types (L,M,S)
  - Caused by different proteins in the channel.
- Play major role when bright.
- Has lower sensitivity.
- One eye has 7,000,000.
- Clustered at fovea (中心窩).
- Fast Response.

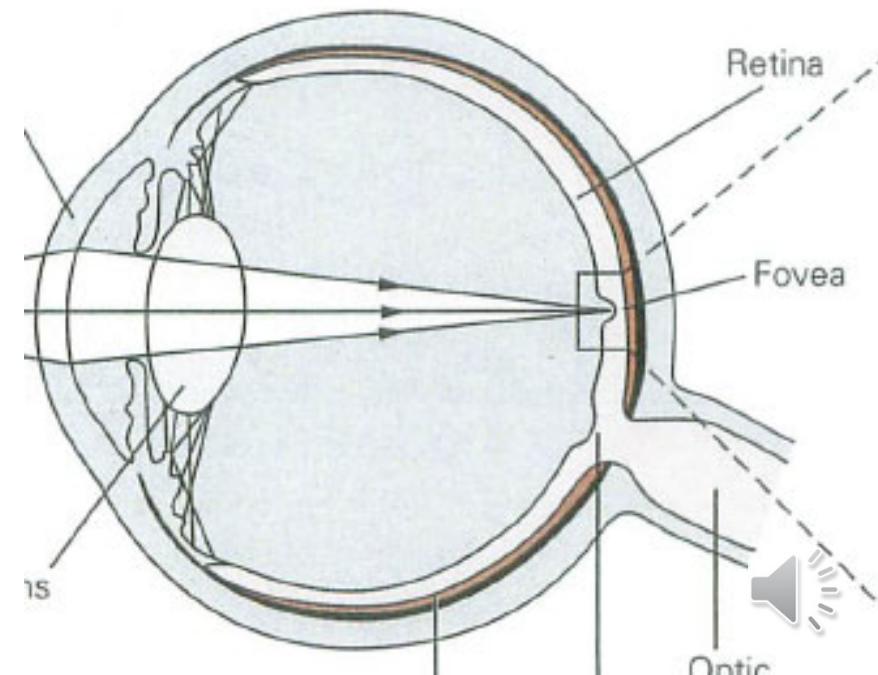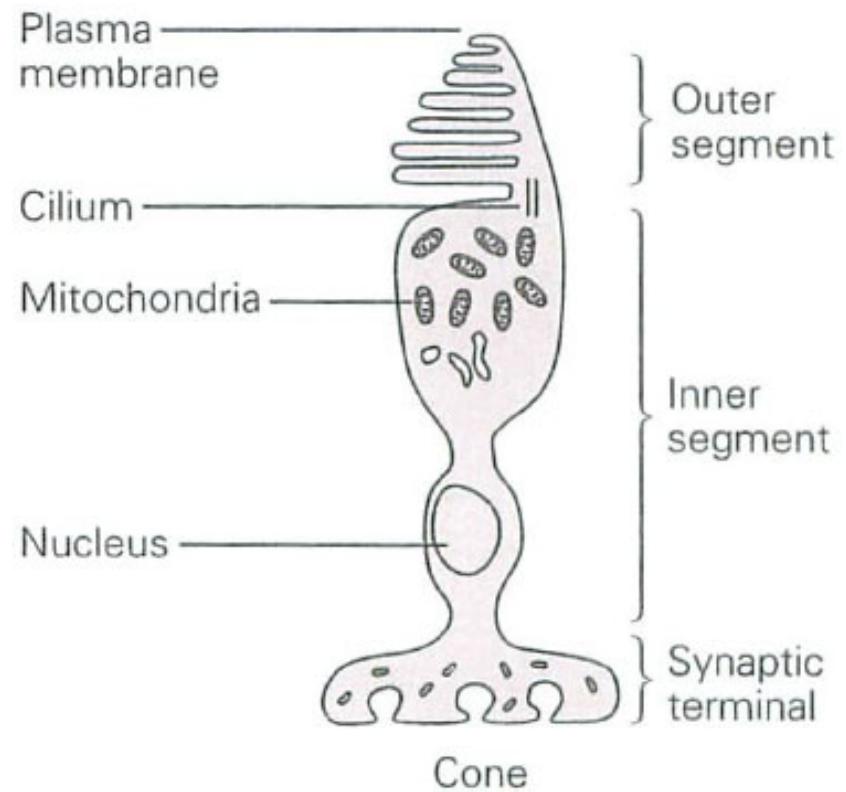

# 桿體細胞・錐體細胞／Rod cell & Cone cell

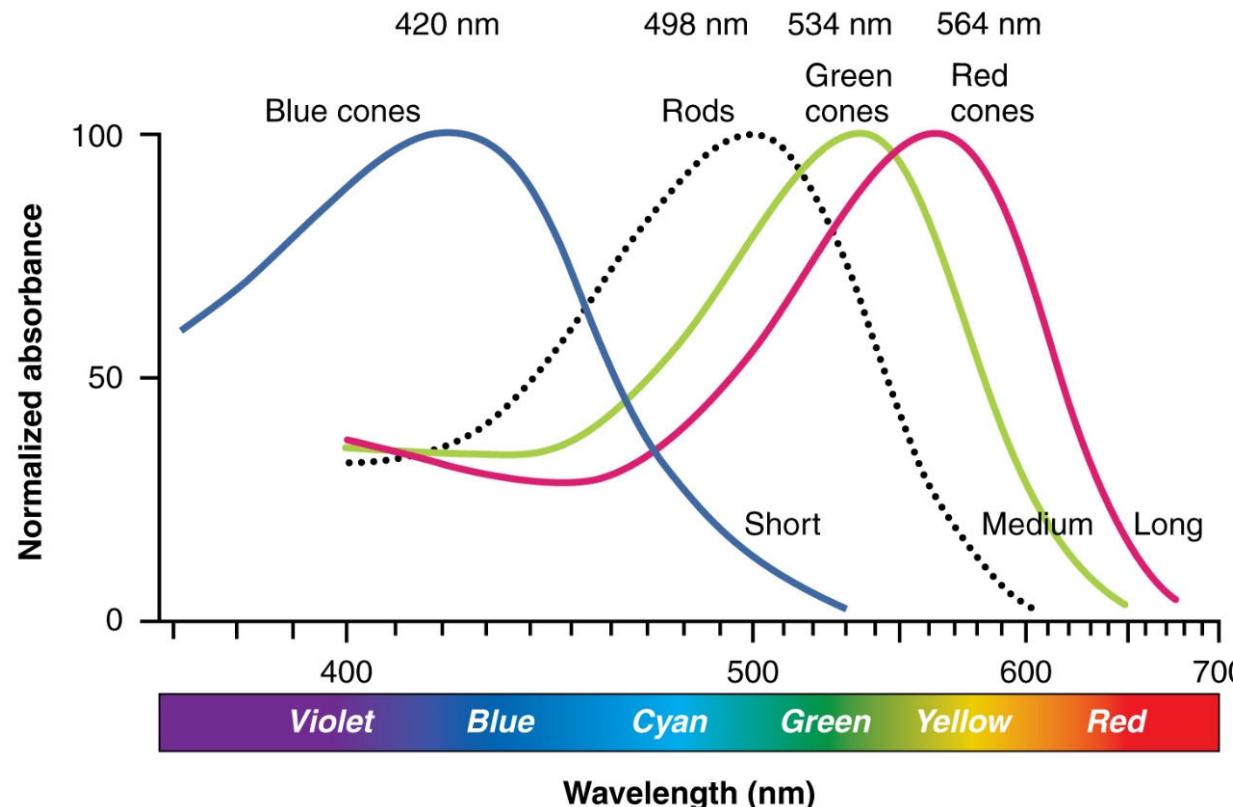


Photoreceptor Cells (Wikipedia)  
[https://en.wikipedia.org/wiki/Photoreceptor\\_cell](https://en.wikipedia.org/wiki/Photoreceptor_cell)

- Rod cell: black & white sensor.
  - peak = 498nm.
  - Green Laser Pointer is the best for presentation.
- Cone cell: Three types
  - S: 420nm, M: 534nm, L: 564nm
  - Color perception is based on the combination of the three.



# 桿体・錐体の分布／Distribution of the cells.

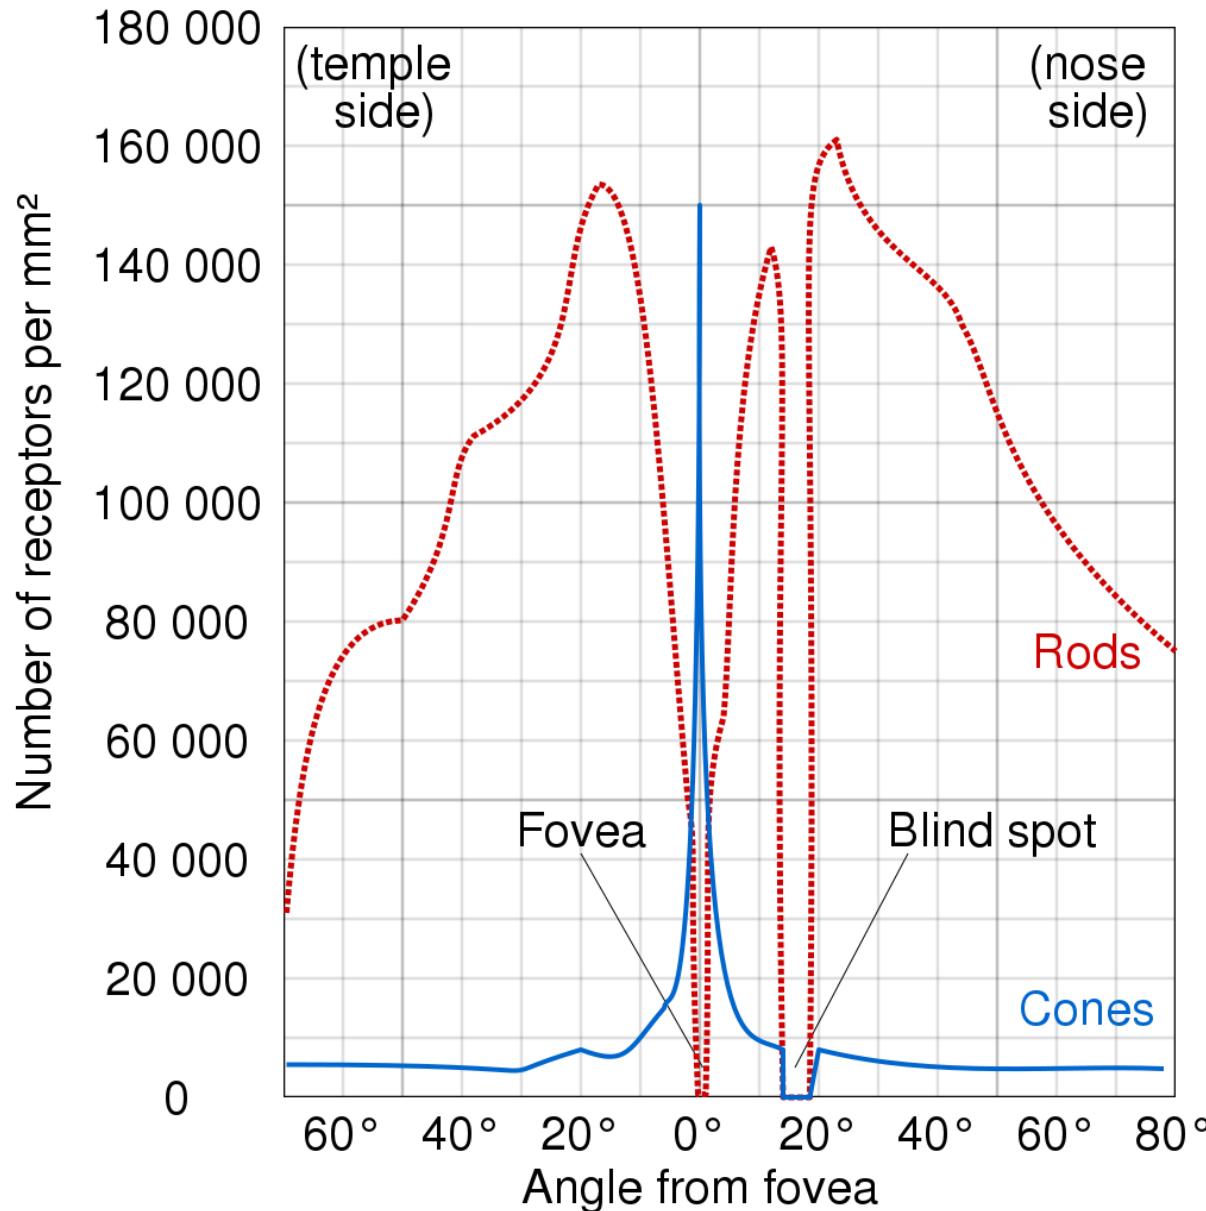

Photoreceptor Cells (Wikipedia)  
[https://en.wikipedia.org/wiki/Photoreceptor\\_cell](https://en.wikipedia.org/wiki/Photoreceptor_cell)

- Cone cell = central vision  
(中心視)
  - ✓ Peripheral vision is almost color blind
- Rod cell = peripheral vision  
(周辺視)
  - ✓ You can see stars better by peripheral vision



# 周辺視野への情報呈示(1)/Peripheral Display





<https://www.youtube.com/watch?v=QLB0RkmKbSQ>

T. Nojima, Y. Saiga, Y. Okano, Y. Hashimoto, H. Kajimoto, "The Peripheral Display for Augmented Reality of Self-Motion", ICAT2007.

- 周辺視野への表示は臨場感を表示するために不可欠
- 周辺視野は空間解像度は低い。
- 周辺視野のほうが時間的解像度(CFF:Critical Fricker Frequency) は高い  
⇒LEDマトリクスで運動表示
- 右の動画のように下につけて地面の流れを出すのがポイント  
(関連知見:深澤「ヴェクションにおける地面優位効果」H18年度東京大学卒業論文)



# 周辺視野への情報呈示(2)/Peripheral Display

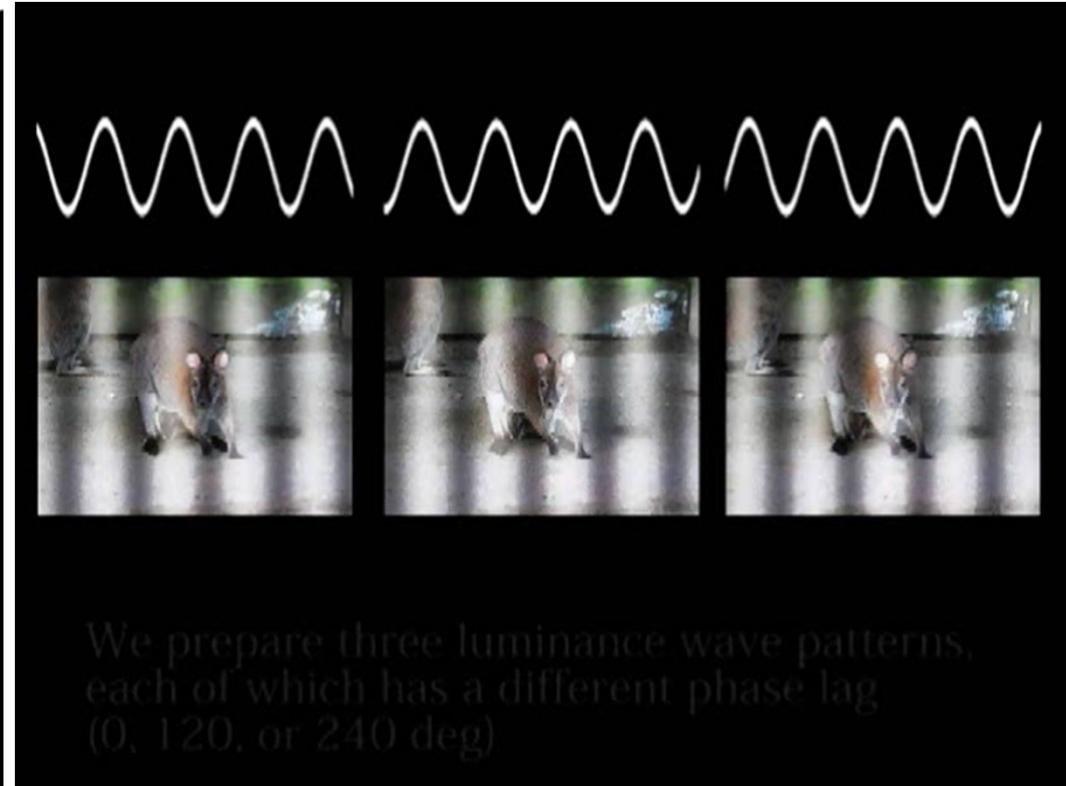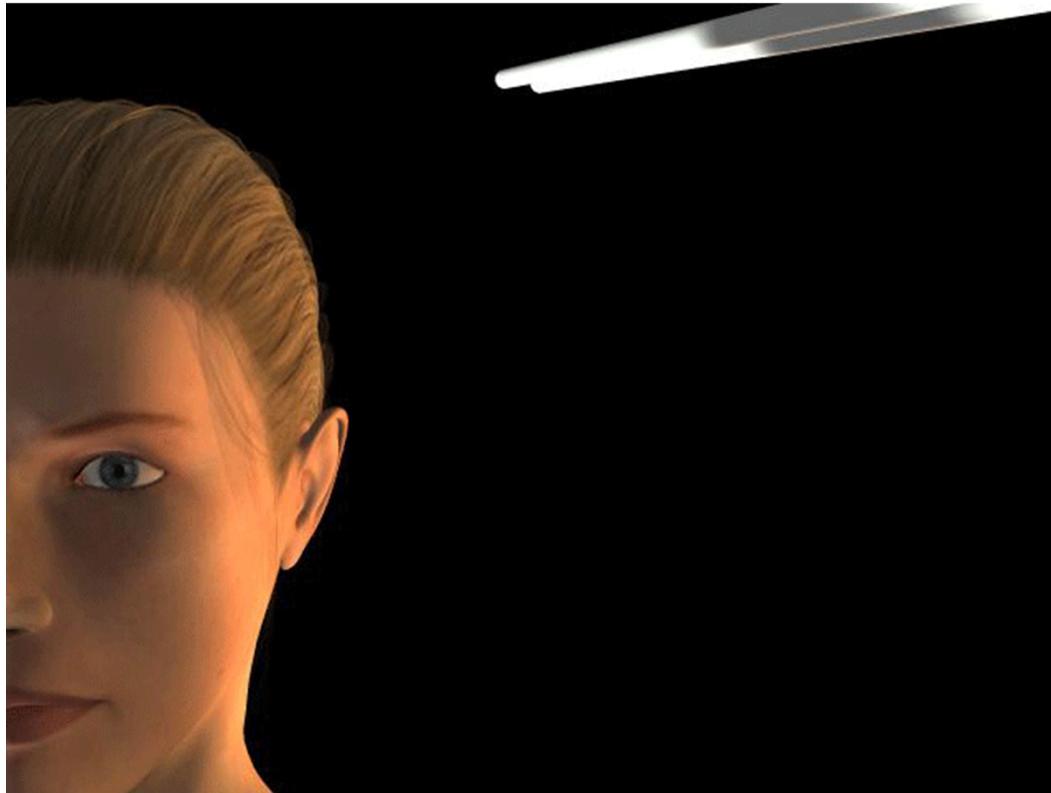


Y. Okano, S. Fukushima, M. Furukawa, H. Kajimoto, "Embedded Motion", SIGGRAPH Asia 2010, Poster, Korea.

- 周辺視野のほうが時間的解像度(CFF:Critical Fricker Frequency)は高いことを利用すると、周辺視野にだけ知覚可能な「チラツキ」を運動情報提示として利用できる。
- 見たところがつねに中心視野になるので、視線検出も不要。



# 周辺視野への情報呈示(3)

(CHI2013) Brett R. Jones: IllumiRoom: Peripheral Projected Illusions for Interactive Experiences

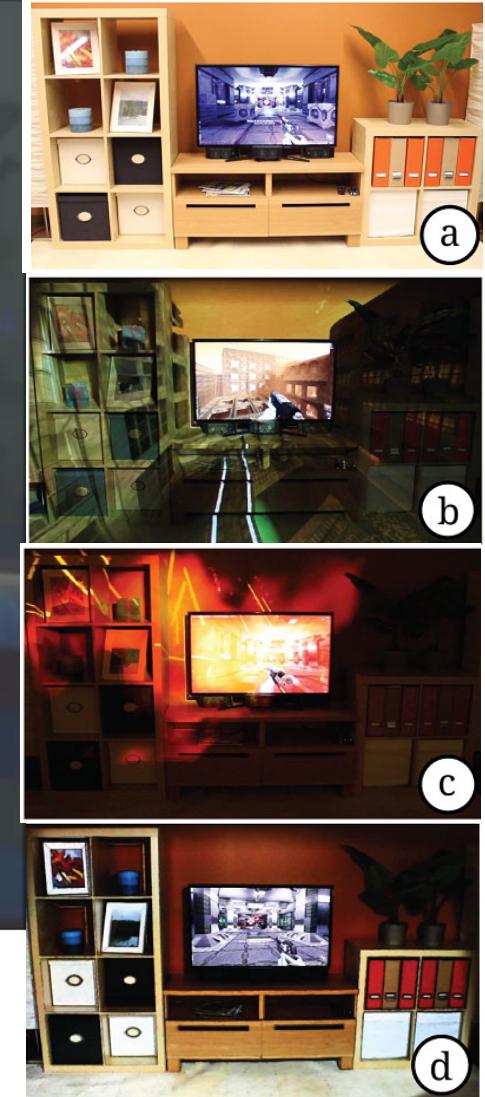

<http://www.youtube.com/watch?v=re1EatGRV0w>



(CHI2016) Augmenting the Field-of-View of Head-Mounted Displays with Sparse Peripheral Displays, Robert Xiao, Hrvoje Benko



<https://www.youtube.com/watch?v=af42CN2PgKs>

HMDに低解像度のLEDを並べて周辺視野を拡張する。



(CHI2018)ExtVision: Augmentation of Visual Experiences with Generation of Context Images for a Peripheral Vision Using DNN  
Naoki Kimura, Jun Rekimoto



# ExtVision:

Augmentation of Visual Experiences with Generation of Context Images  
for Peripheral Vision Using Deep Neural Network

**Naoki Kimura**

University of Tokyo  
Tokyo, Japan

**Jun Rekimoto**

University of Tokyo / Sony CSL  
Tokyo, Japan

- [https://www.youtube.com/watch?v=D9Mc\\_P8FZbk](https://www.youtube.com/watch?v=D9Mc_P8FZbk)
- 周辺視野へのコンテンツ拡張をニューラルネットワークによって行う。



# 色知覚は空間解像度が低い Color process has very low resolution



Original

Gray

Color only



# RGB and YCbCr(YUV, Lab)

RGB: corresponds to 3 cone cells.


Mathematics tells us...

ANY 3 independent vectors can be basis vectors

YCbCr (YUV):

- Y(brightness)
- Cb(color axis 1)
- Cr(color axis 2)

Similar to brain's color perception

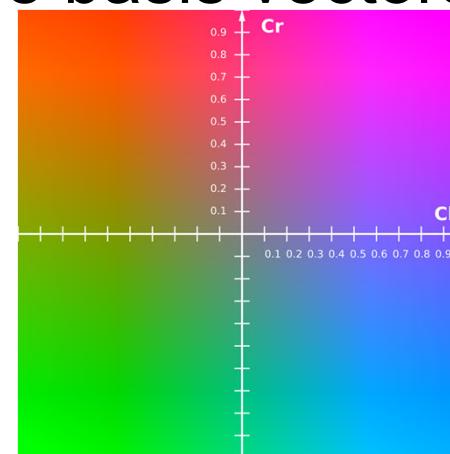


$$Y = 0.257R + 0.504G + 0.098B + 16$$

$$Cb = -0.148R - 0.291G + 0.439B + 128$$

$$Cr = 0.439R - 0.368G - 0.071B + 128$$


Used in image compression

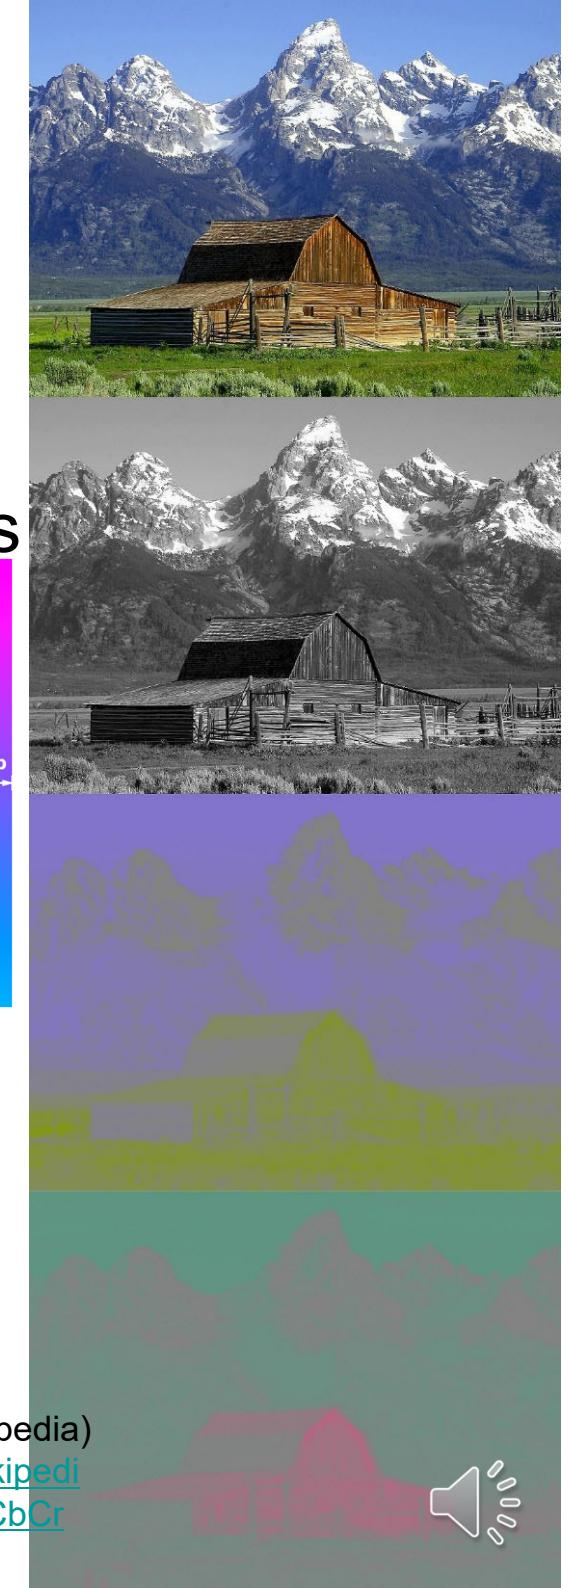

YCrCb (Wikipedia)  
<https://en.wikipedia.org/wiki/YCbCr>



# 色覚のバリエーション／Color blindness

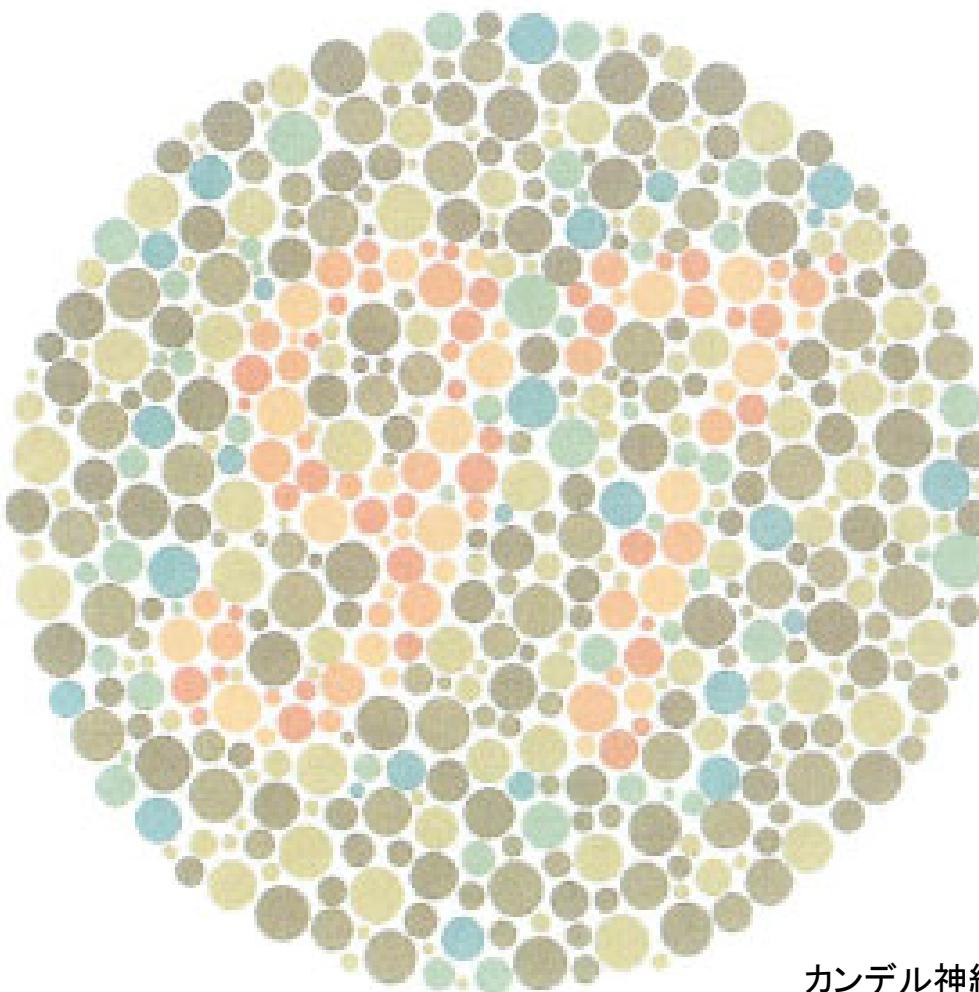

カンデル神経科学(Principles of Neural Science)  
<https://www.medsi.co.jp/kandel/syousai/index.html>

- One to three types of cone cells lacks.



# ChromaGlasses: Computational Glasses for Compensating Colour Blindness

Tobias Langlotz, Jonathan Sutton, Stefanie Zollmann, Yuta Itoh, Holger Regenbrecht


Accepted for ACM CHI 2018



- [https://www.youtube.com/watch?v=xx4bPIBtqv0&feature=emb\\_logo](https://www.youtube.com/watch?v=xx4bPIBtqv0&feature=emb_logo)
- 色を区別できるようにするARシステム。




# 網膜での情報処理／Retinal image processing

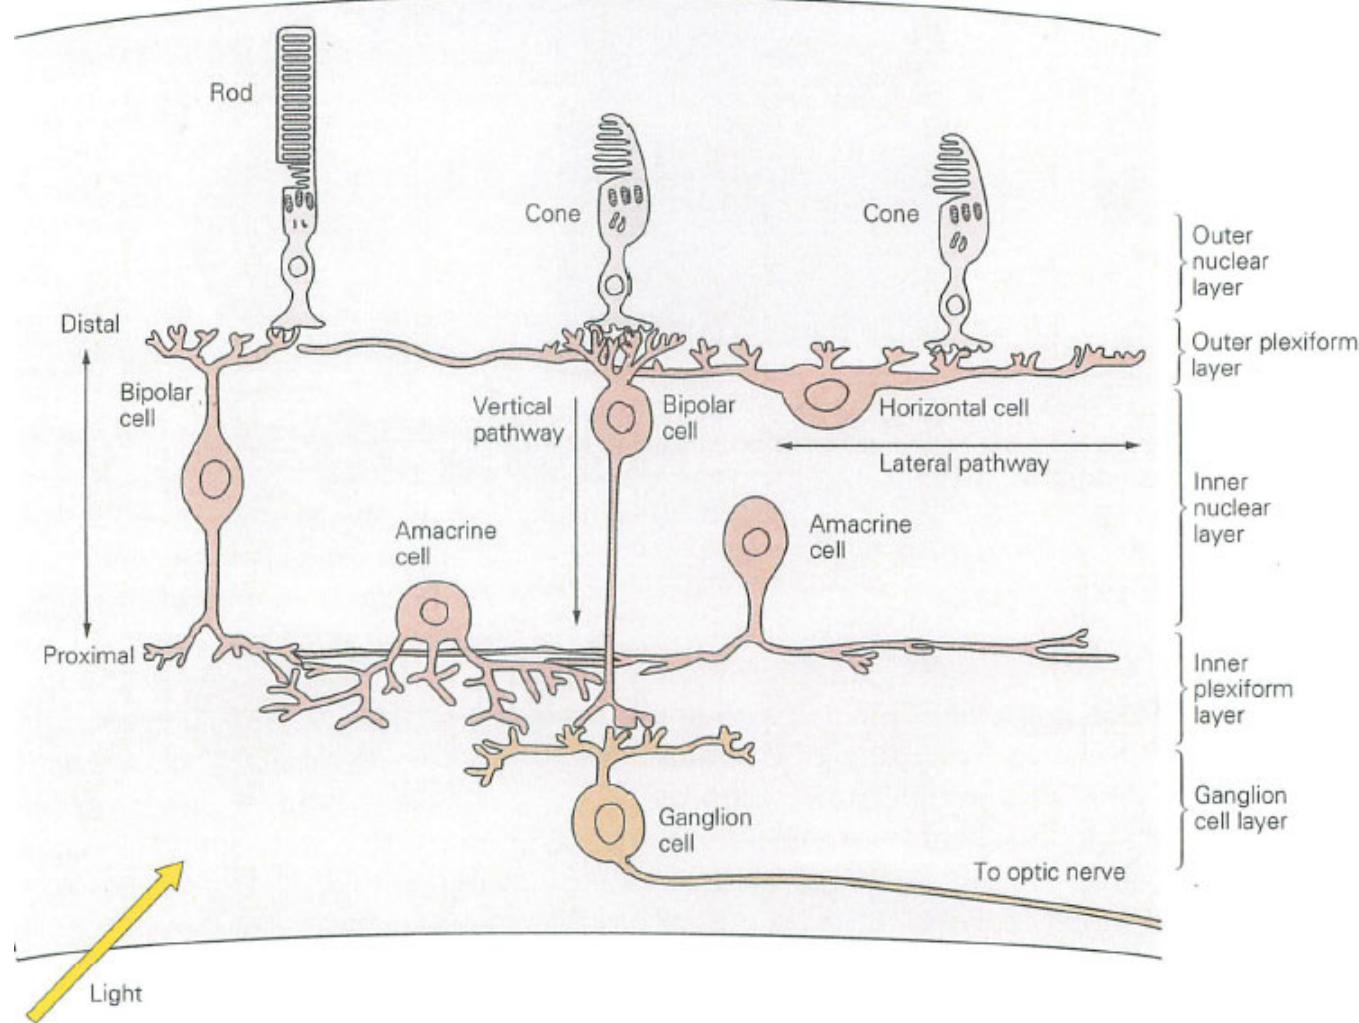


- Sensors: About 200,000,000 / eye
- Nerve axons to the brain: about 1,000,000 / eye
- Retinal image process: 200 cells  $\Rightarrow$  1 output






# Key to the retinal process: “Mach belt” illusion

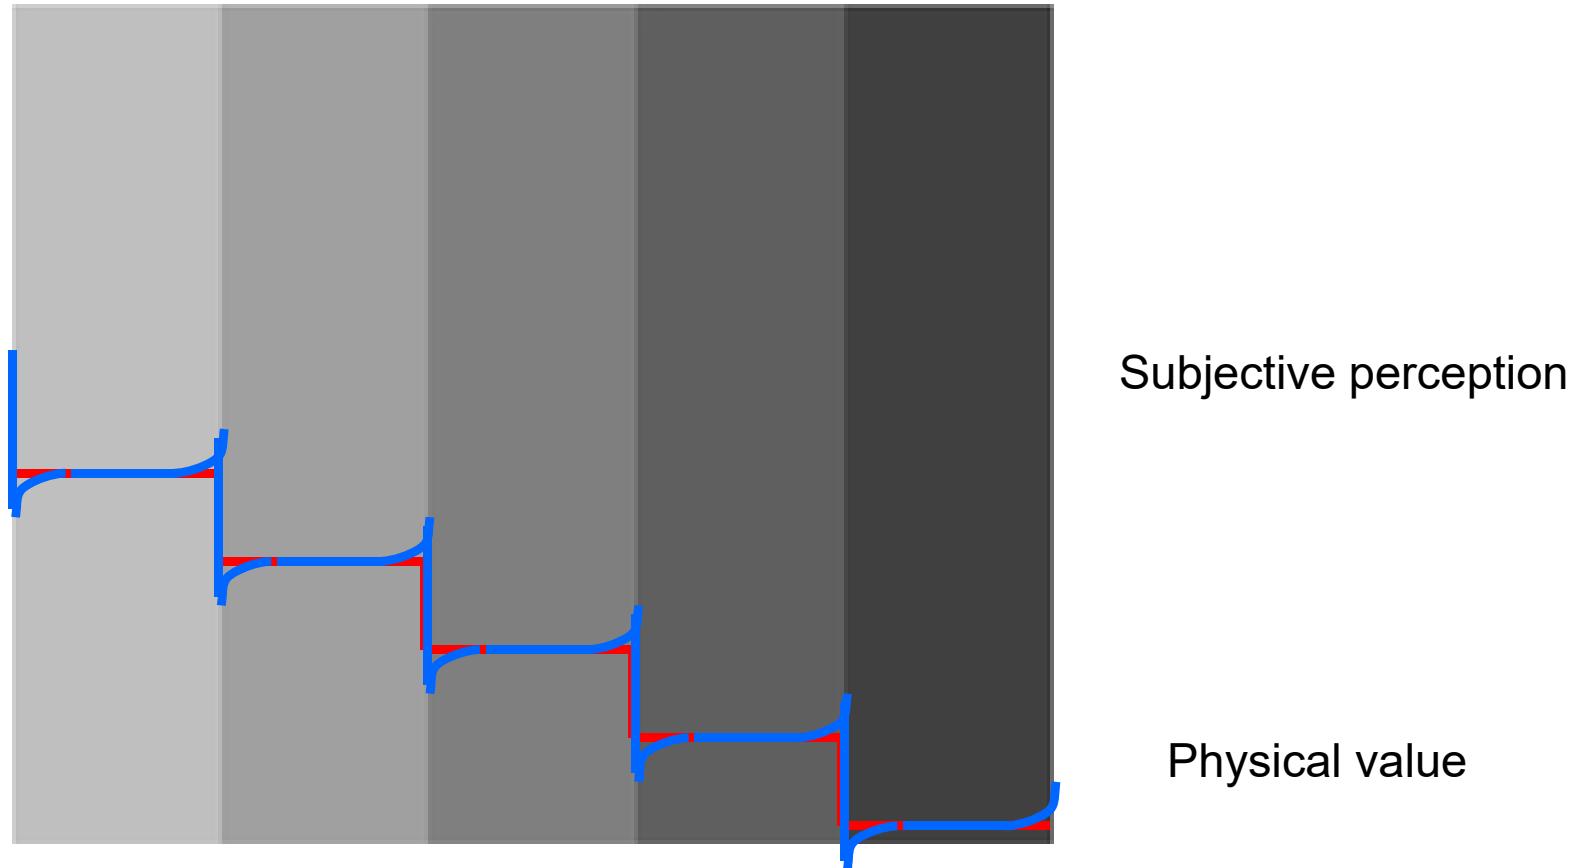



# 側抑制／Lateral inhibition(1/3)

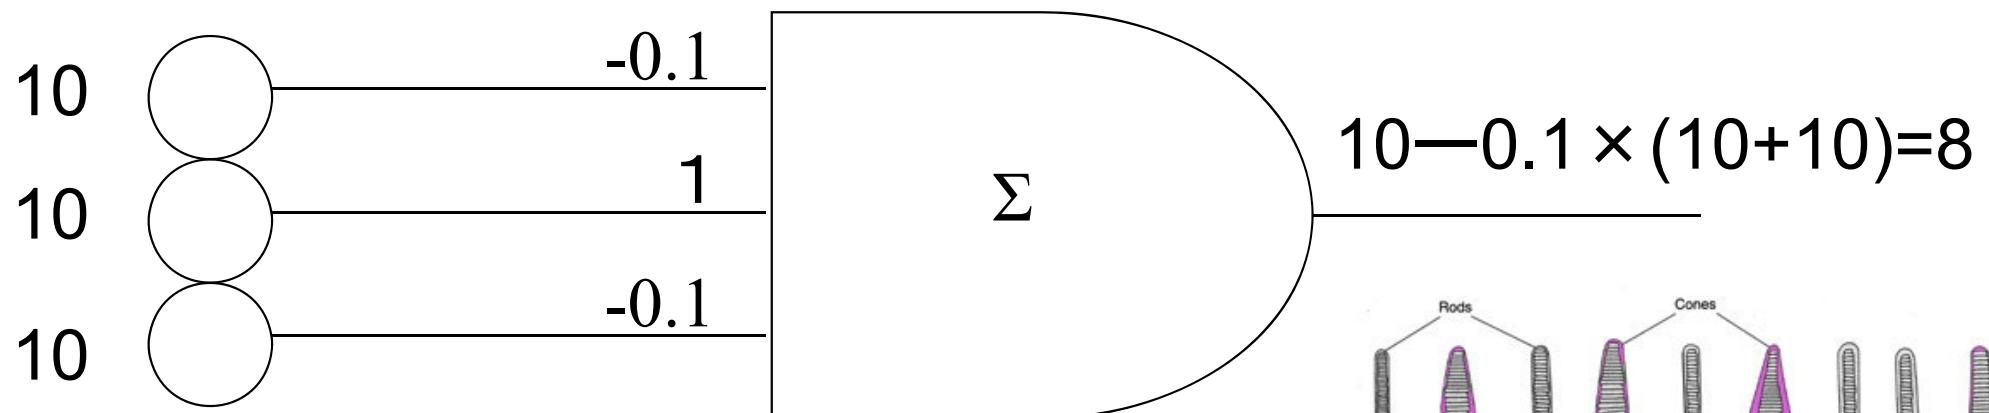

- Synaptic calculation
- Central input: +(plus)
- Surrounding input: -(minus)

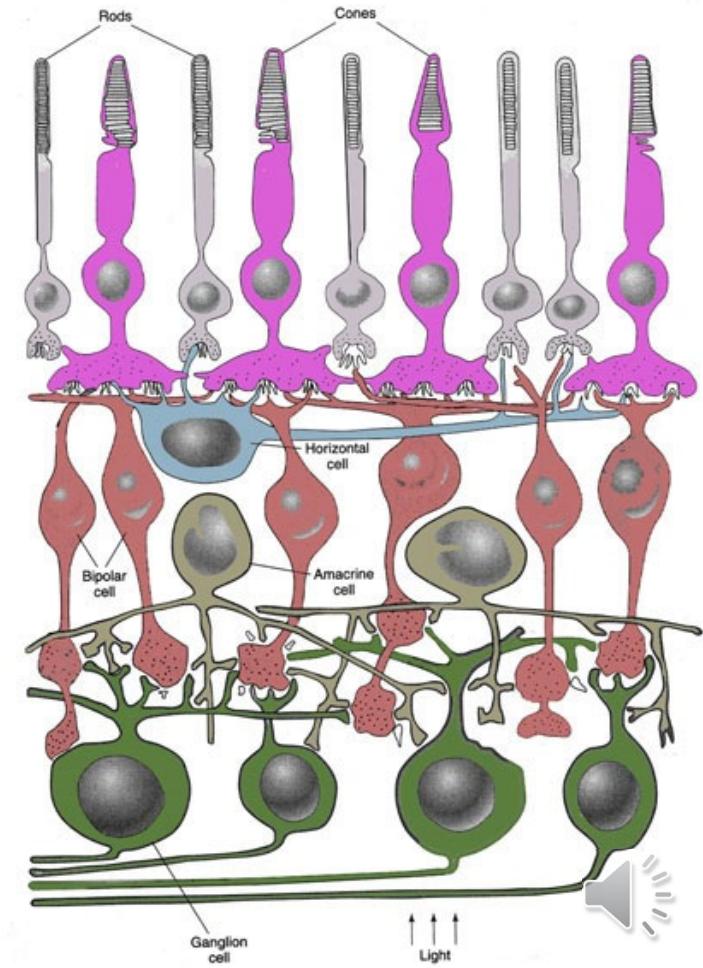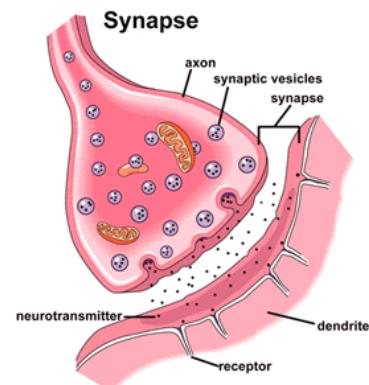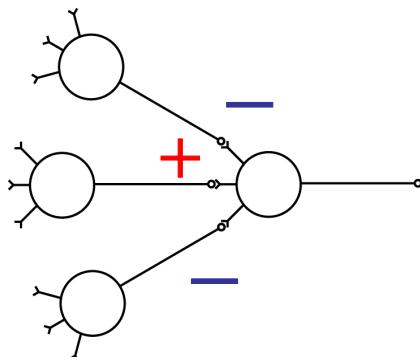


# 側抑制 / Lateral inhibition (2/3)

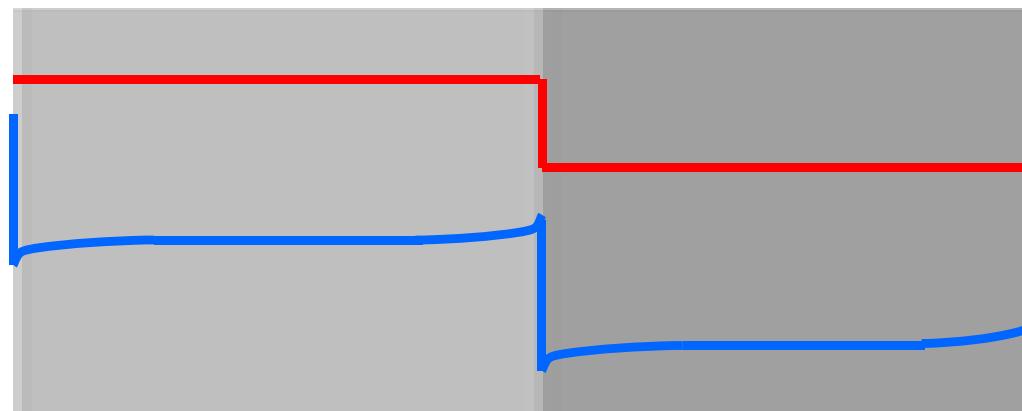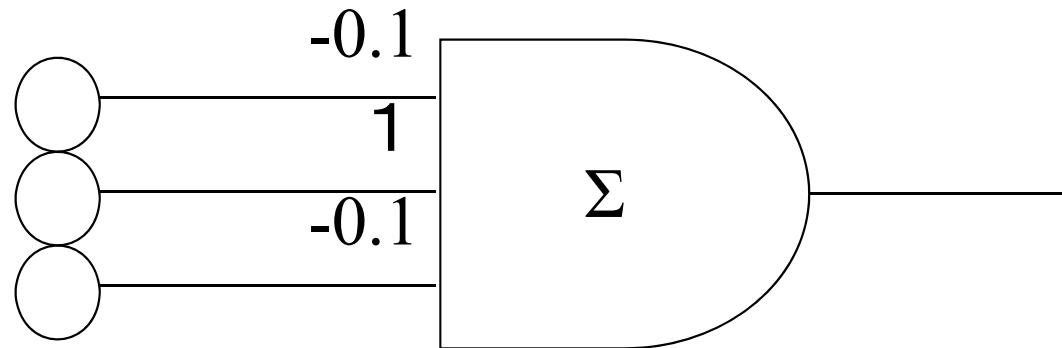

10 10 10 10 10 10 5 5 5 5 5  
8.0 8.0 8.0 8.0 8.5 3.5 4.0 4.0 4.0 4.0



# 側抑制／Lateral inhibition(3/3): Harman grid illusion





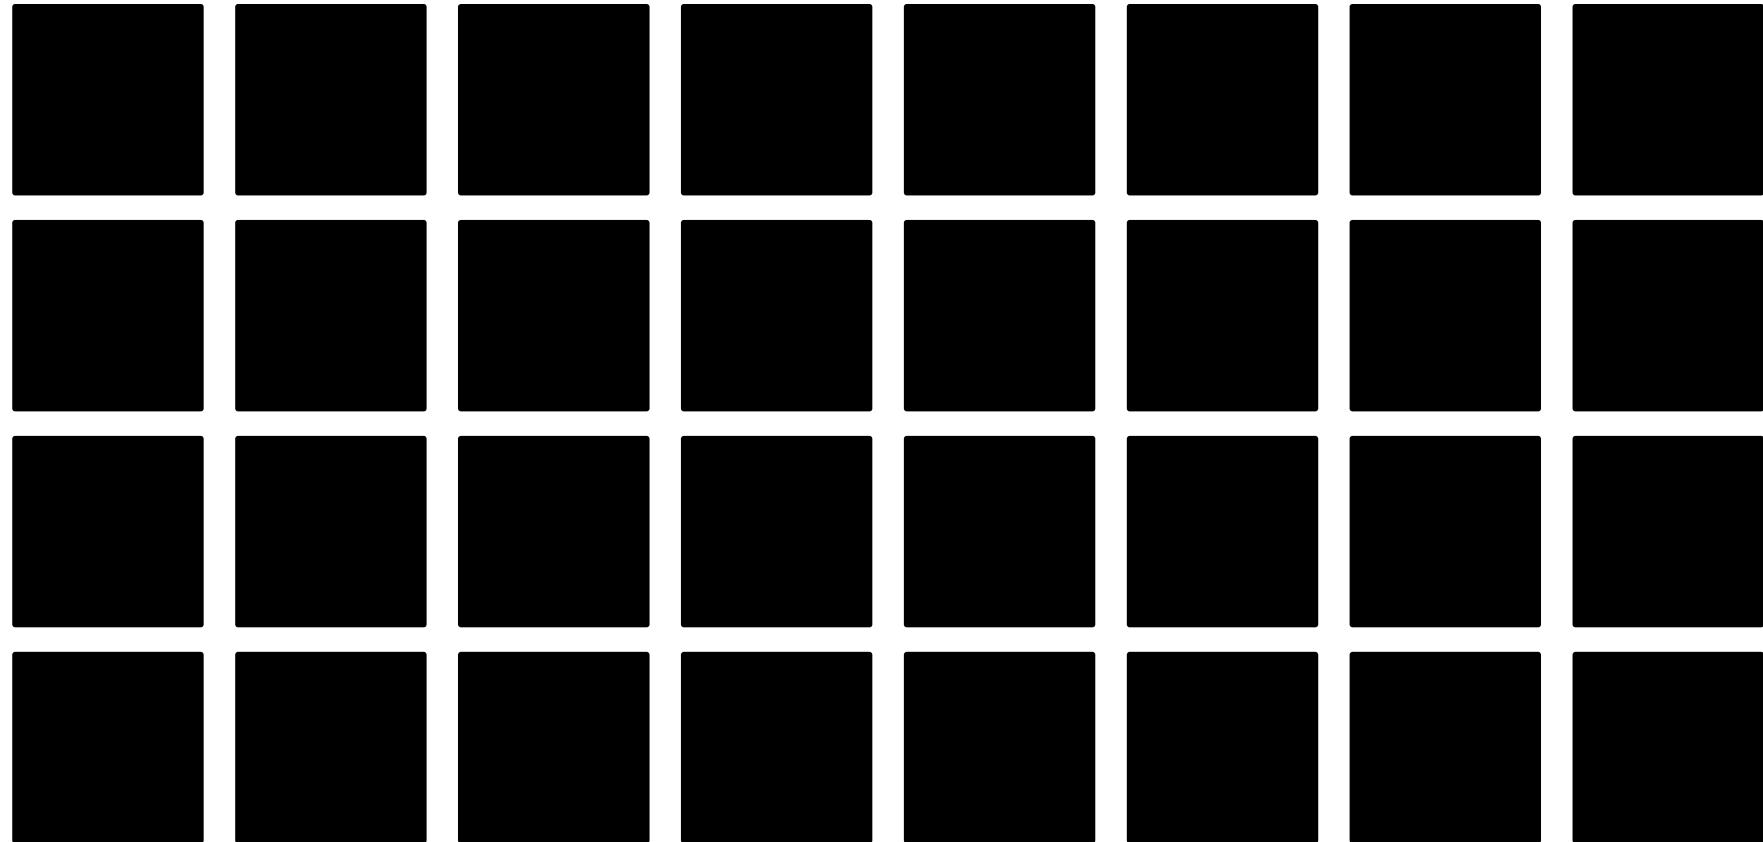


「交差点の周りのほうが、路の周りよりも平均的な明るさが大きい」ために、交差点が暗く感じられる」と説明される。

- (1) 周辺視／peripheral vision: the cross point becomes dark, due to lateral inhibition
  - (2) 中心視／central vision: No such effect
- ⇒The peripheral vision “compress” larger field.



# TODAY's TOPIC

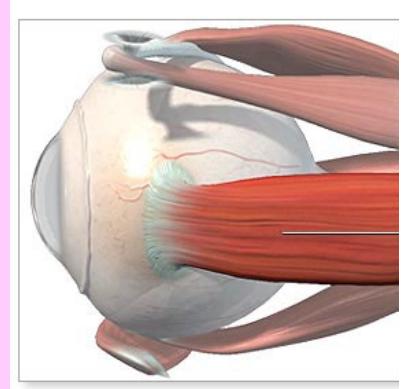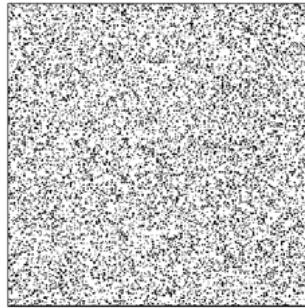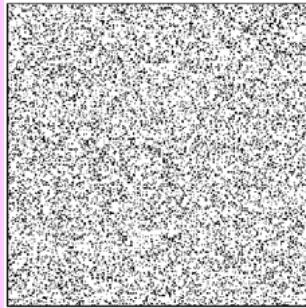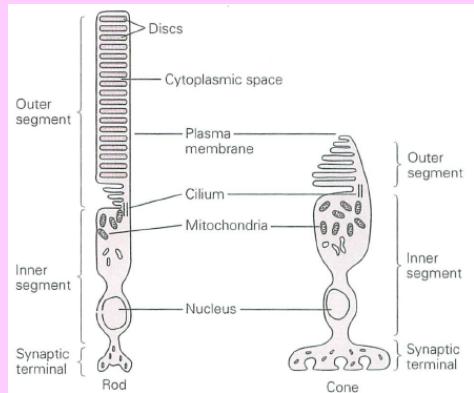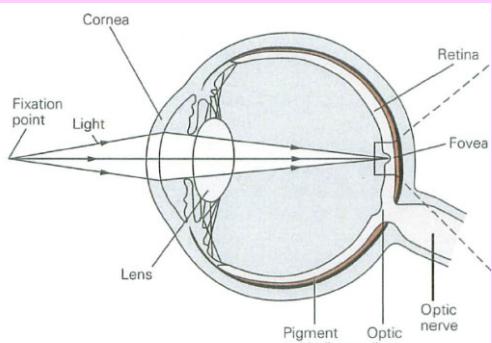

- 目の構造／Eye structure
- 目のセンサ／Eye sensors
- 奥行き知覚／Depth perception
- 眼球運動／Eye movement



# 奥行き知覚の鍵／Depth perception cues

- 単眼性／With single eye
  - 経験／Experience
  - 焦点調節／Accommodation
  - 運動視差／Motion Parallax



- 両眼性／With two eyes
  - 輻輳角／Vergence eye movement
  - 両眼視差／Binocular disparity




# Depth cue(1) 経験／Experience



- 記憶／Memory  
Knows the physical size
  - 遠近法／Perspective  
Near= Large, Bottom, Clear  
Far = Small, Top, Blur
  - 重なり(遮蔽)／Occlusion  
Occluded (shielded) objects are more distant than occluding (shielding) objects.
- 


# Depth cue(2) 焦点調節／Accommodation: Changing the power of the lens

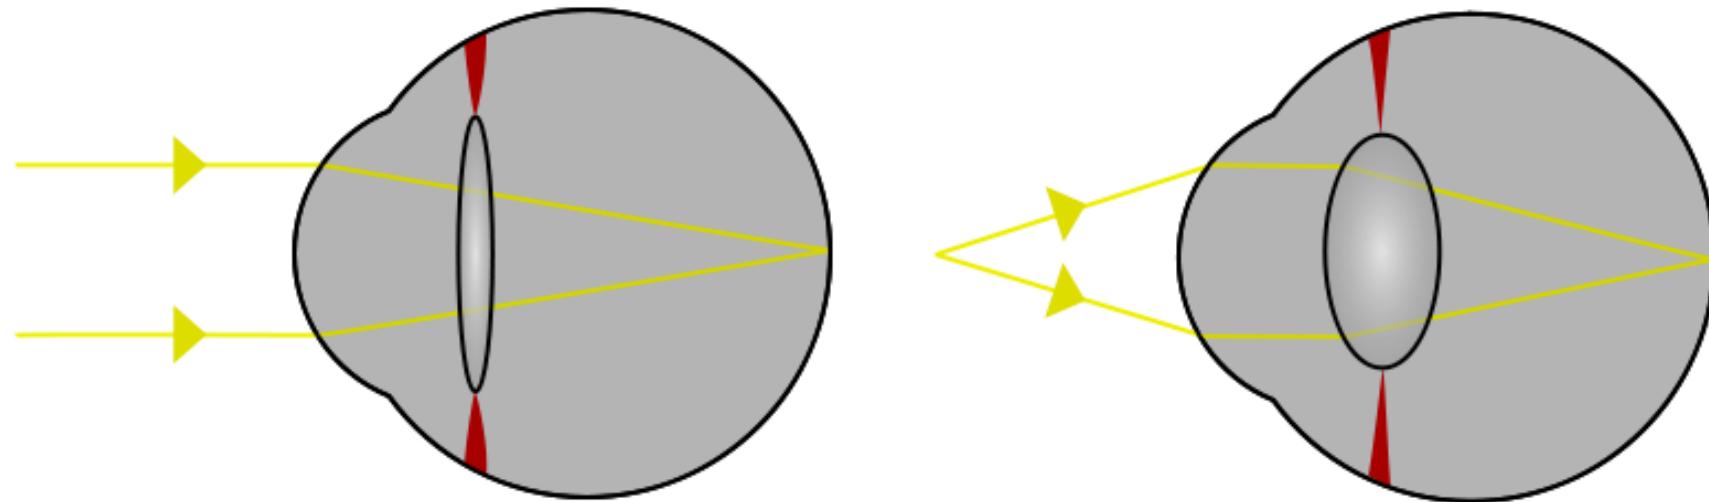

- Automatic focus adjustment by lens deformation
- The adjustment itself works as a depth cue.
  - works at close range.




# Depth cue(3) 運動視差／Motion Parallax

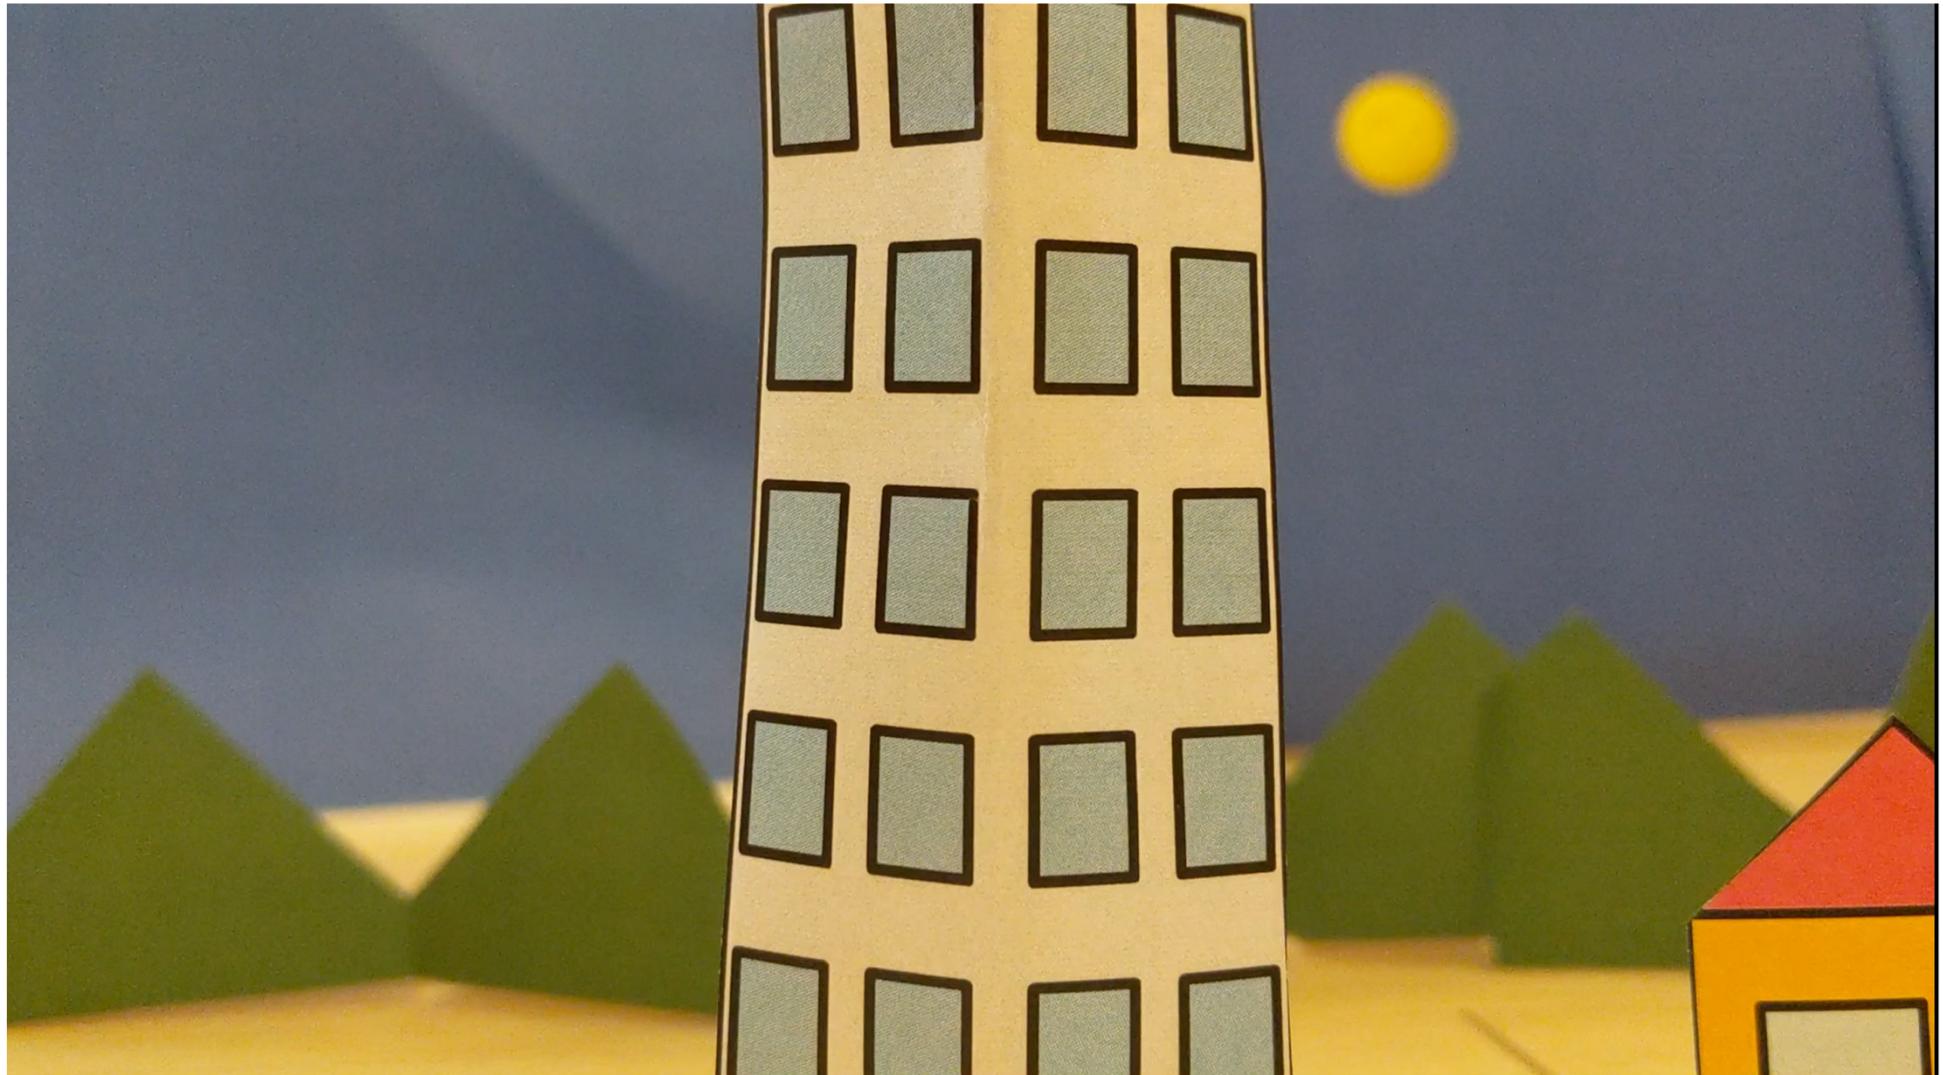

- When we move...
  - Near: Moves in the opposite direction.
  - Far: Does not move, or moves in the same direction.



# Depth cue(4)輻轉／Vergence eye movement

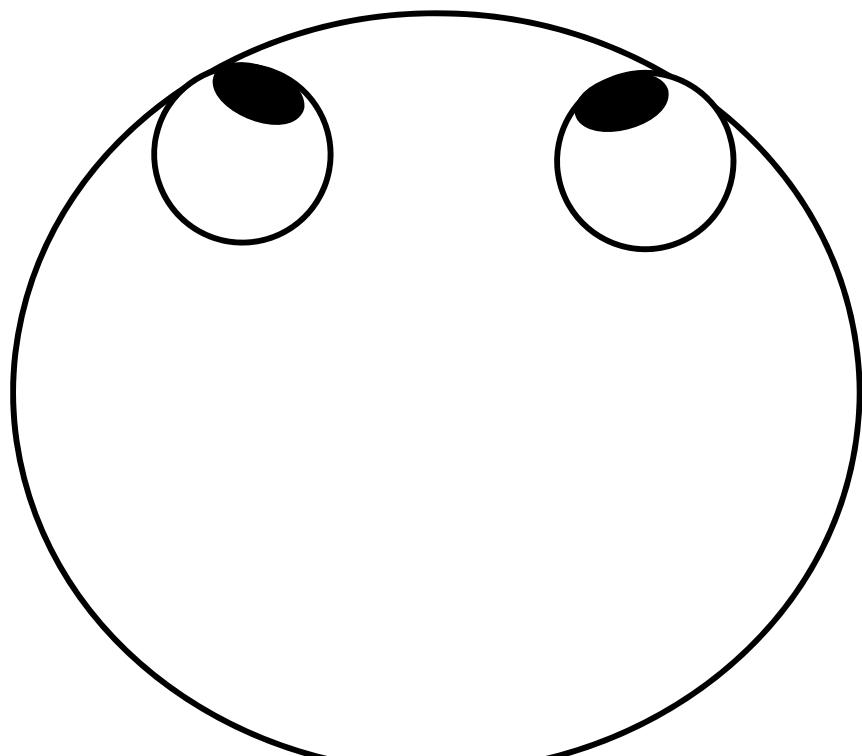



- The eyes converge (move inward) and diverge (move outward) by distance.



# 輻轉 - 調節矛盾の問題


## Vergence-accommodation conflicts

- Accommodation & vergence are slightly coupled.
- Stereo display problem:
  - Accommodation=constant
  - Vergence = variable⇒ Severe Fatigue

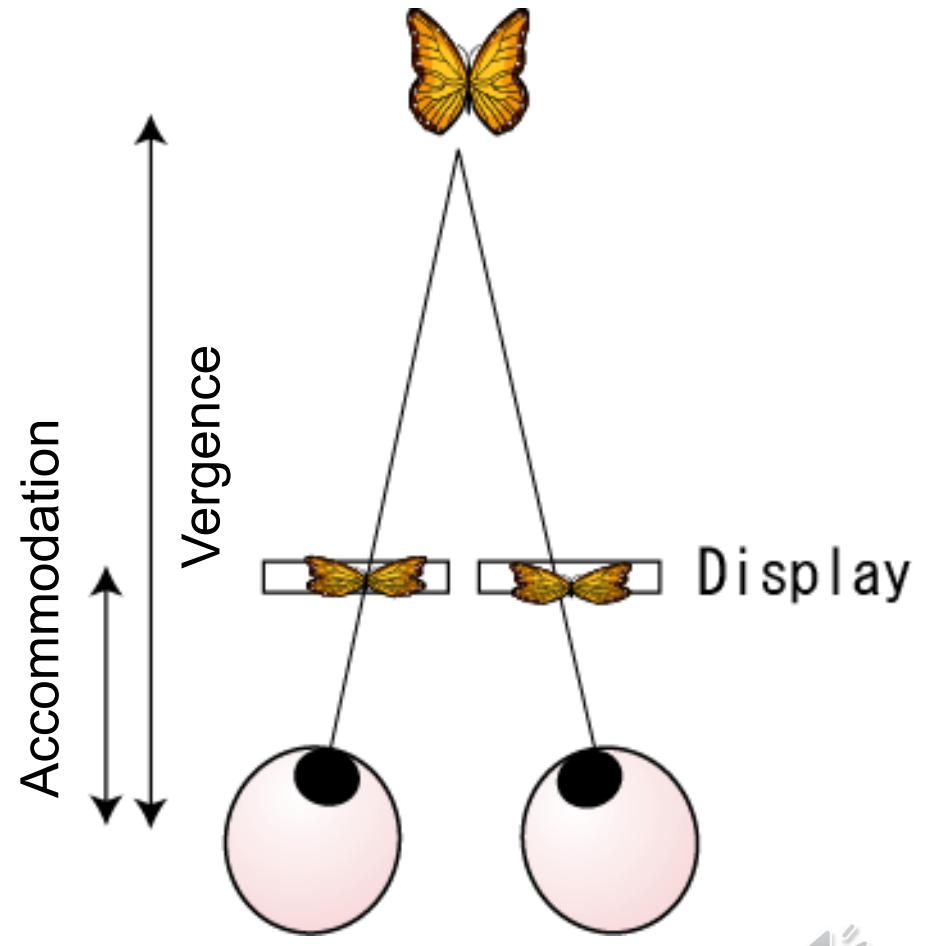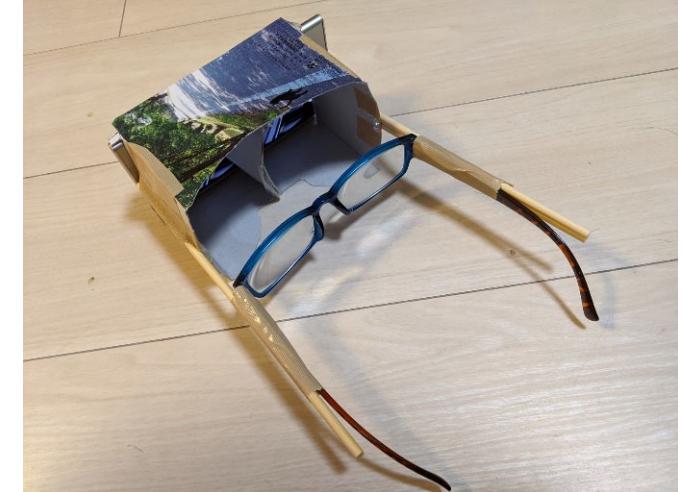


# 輻轉 - 調節矛盾の許容範囲

## Tolerance of vergence-accommodation conflicts

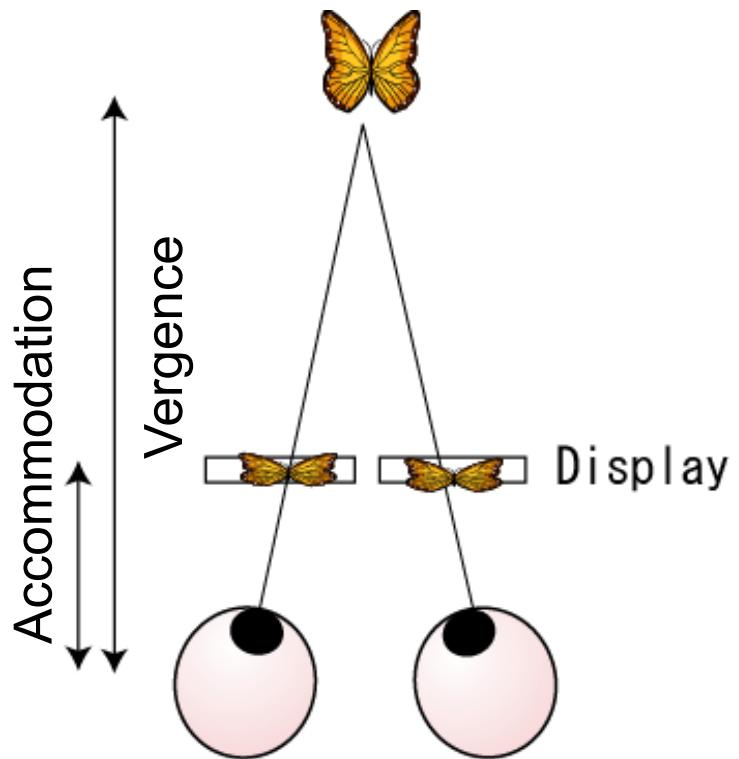

(ex) Physical monitor 0.5m away from the eyes:

- 0.3m to 1.2m virtual object can be displayed.
- 0.4m to 0.8m virtual object can be **comfortably** displayed.

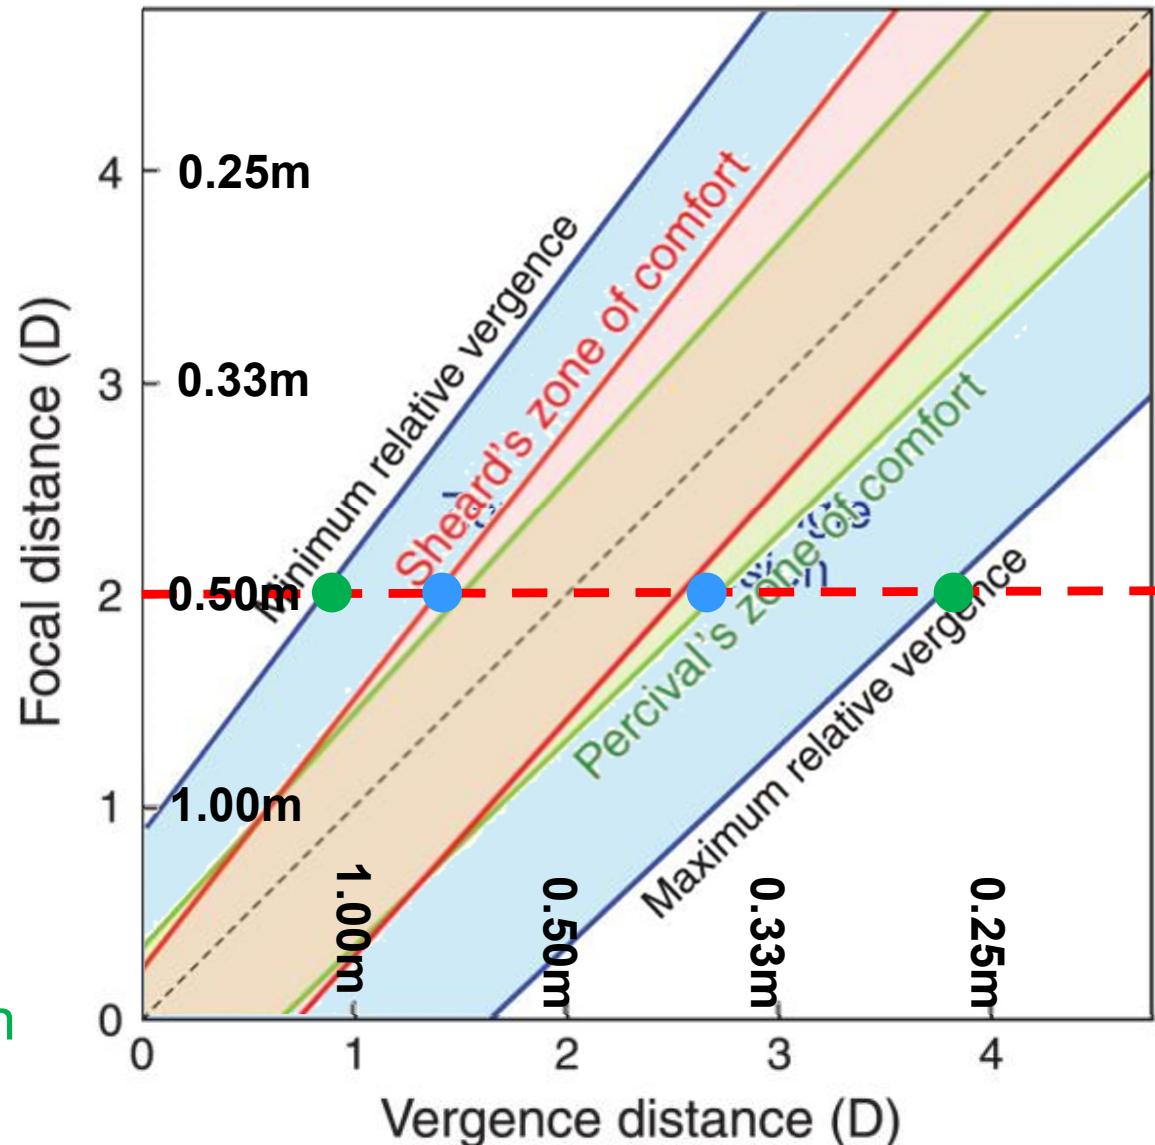

Modified from: T. Shibata, J. Kim, D.M. Hoffman, M.S. Banks: The zone of comfort: Predicting visual discomfort with stereo displays. *J. Vision*, 2011, 11(8):11 <https://europepmc.org/article/pmc3369815>

# (CHI2016) Novel Optical Configurations for Virtual Reality: Evaluating User Preference and Performance with Focus-tunable and Monovision Near-eye Displays

Robert Konrad, Emily Cooper, Gordon Wetzstein

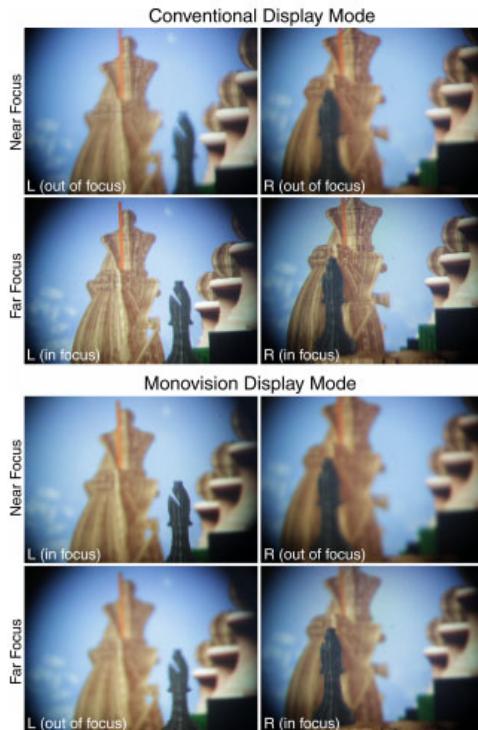


Figure 1. Focus-tunable near-eye display with different rendering modes. In the top panels, we illustrate via photographs how the images seen by each eye in a typical near-eye display are only focused properly when the eyes are focused at a relatively far distance (lower row). When the eyes focus near, to match objects simulated to be near, both eyes' images are blurry (upper row). Monovision is an alternative display mode where the lenses of the two eyes have different focal lengths, allowing for each eye to accommodate at a different distance. The bottom panels illustrate this mode. When the camera is focused relatively far, the left eye's image is out of focus and the right eye's image is sharp (lower row). When the camera is focused near, the relationship reverses. We asked whether this display mode could improve visual comfort and performance.


## Novel Optical Configurations for Virtual Reality

Evaluating User Preference and Performance with Focus-tunable and Monovision Near-Eye Displays

Robert Konrad  
Stanford University  
rkkonrad@stanford.edu

Emily Cooper  
Dartmouth College  
emilycooper@dartmouth.edu


Gordon Wetzstein  
Stanford University  
gordon.wetzstein@stanford.edu

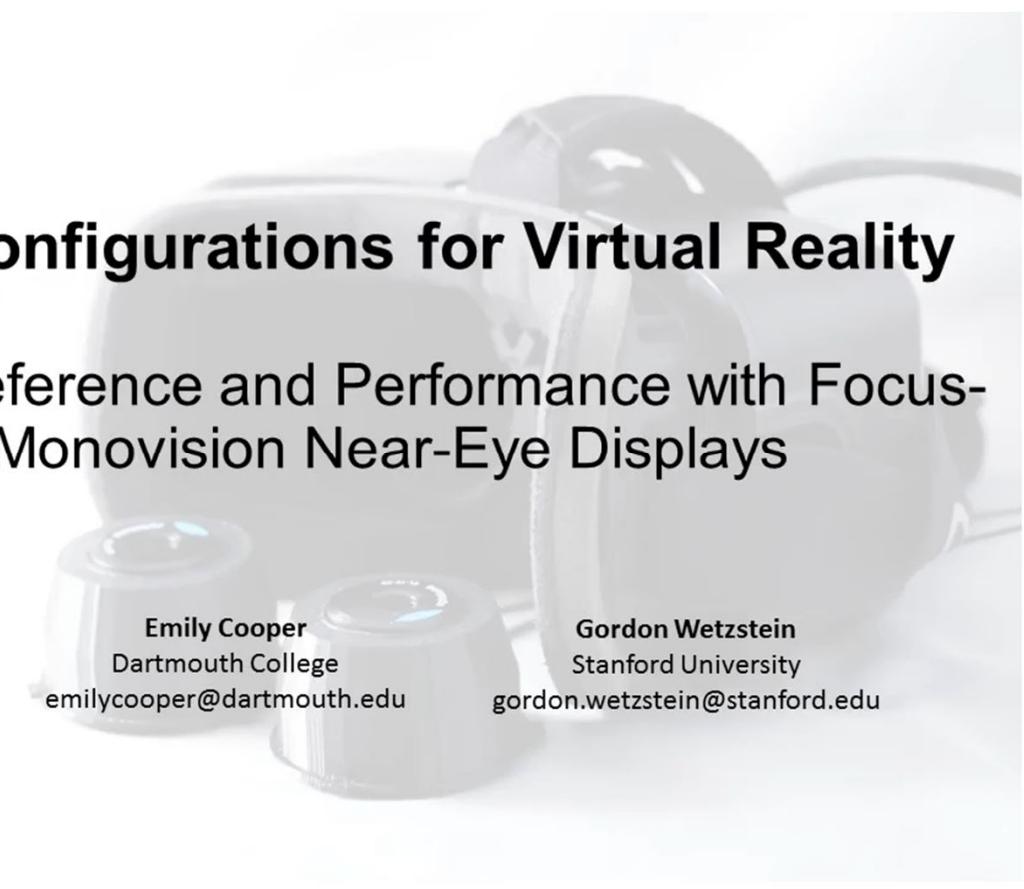


<https://www.youtube.com/watch?v=vDkfH6DTxrY>

HMDの輻輳調節矛盾を解決する複数の手法を比較。液体レンズによって焦点距離を動的に変える方法がもっとよい結果だが、monovisionとして知られる、右目と左目をそれぞれ異なる焦点距離にしたもの(老眼への対処として知られる)でも近い結果を得た。

# Depth cue(5) 両眼視差／Binocular disparity

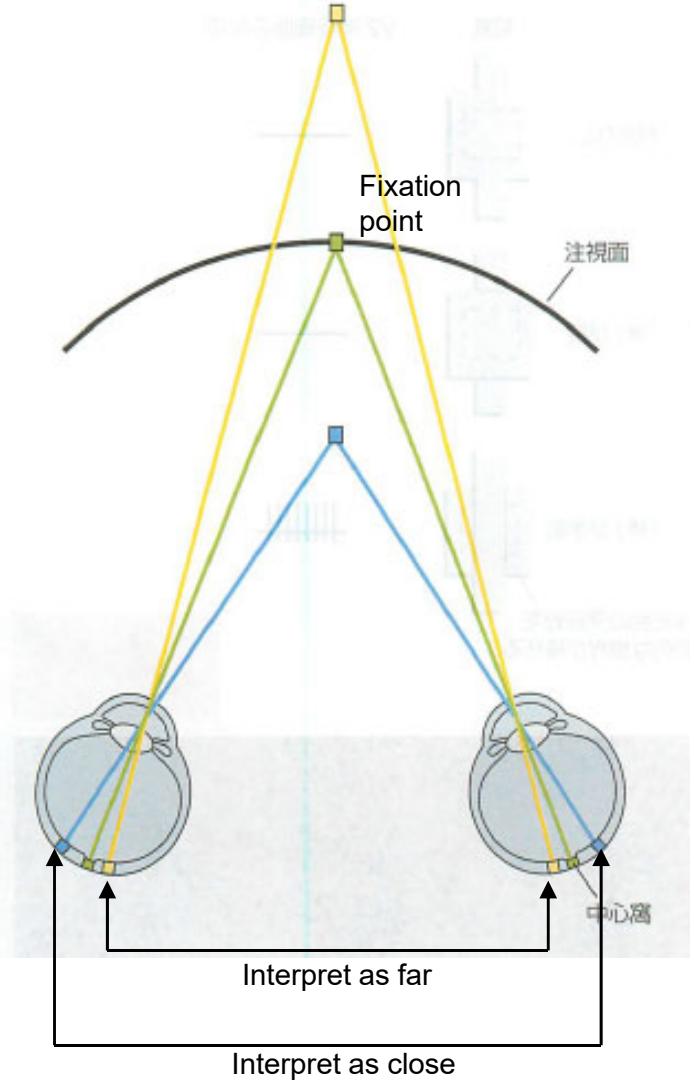

カンデル神経科学(Principles of Neural Science)  
<https://www.medis.co.jp/kandel/syousai/index.html>

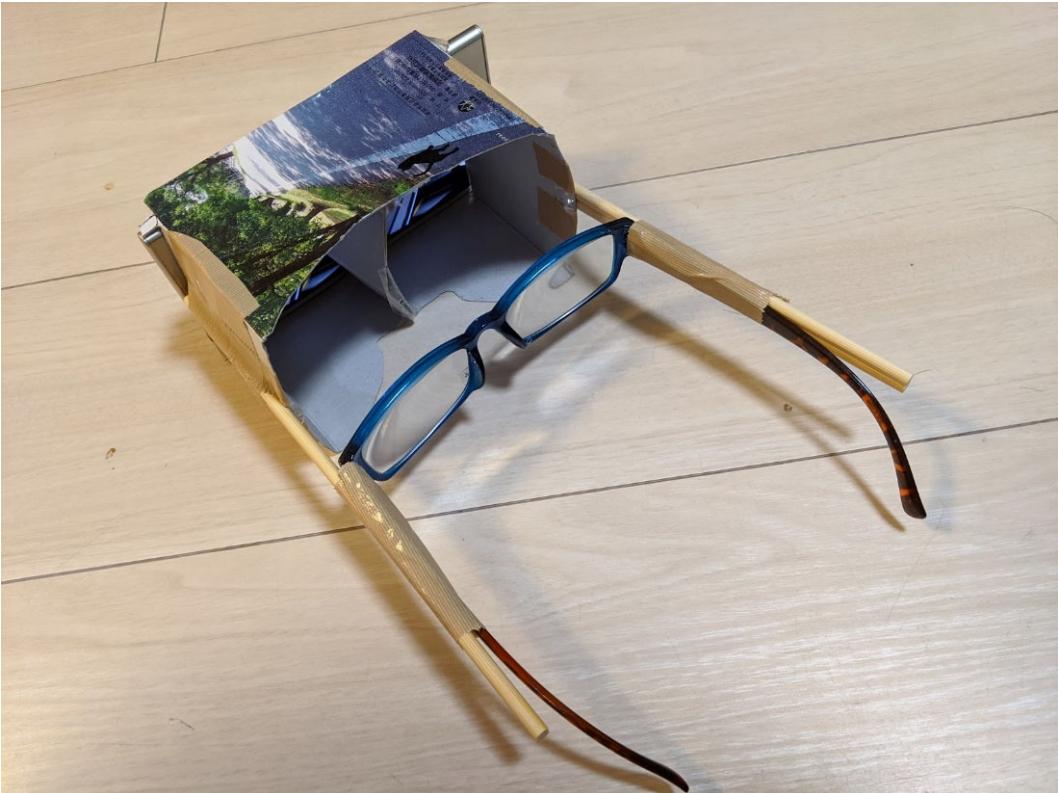

- Disparity = image shift on retina.
  - Vergence: single point.
  - Binocular disparity: whole field of view.





# Stereogram



このスライド全体がはがき程度になるよう画面を拡縮し、20cmくらい離れたところから平行法で観察。  
Adjust the slide size to about 10cm x 15cm, and watch from 20cm away, R/L eyes to R/L images.

# ランダムドット・ステレオグラム

## Random dot stereogram (RDS)

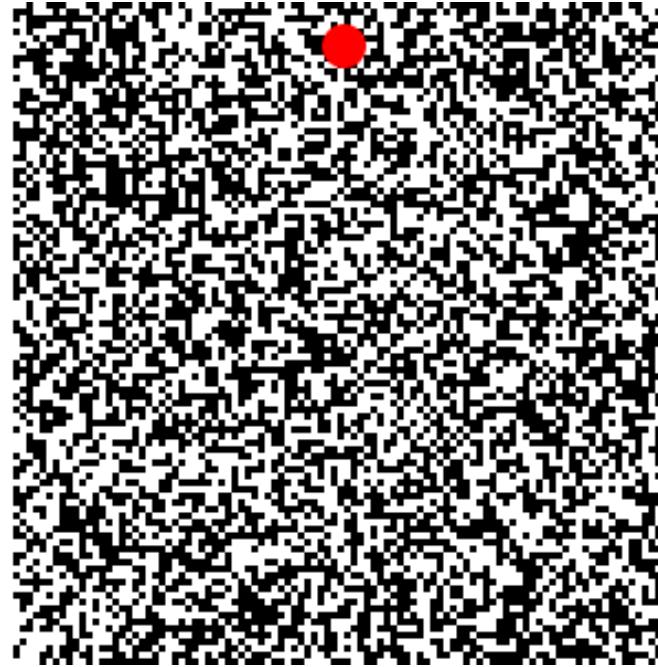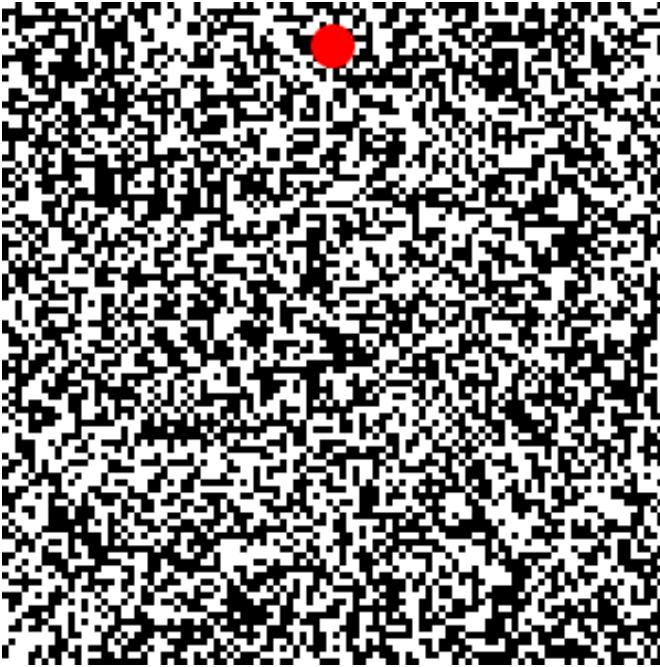

<https://gist.github.com/HiroyukiKajimoto/118e810f391d00f51547d9cbda096c7b>






- Proof of “pure disparity can be distance cue”.  
Before the RDS, “experience” was thought to play major role.
- Found and used during Vietnam War.

Try Dynamic Random Dot Stereogram (DRDS):

<https://www.youtube.com/watch?v=CRyDXVoYfOM&list=PLA4A975B45148C53A>



# TODAY's TOPIC

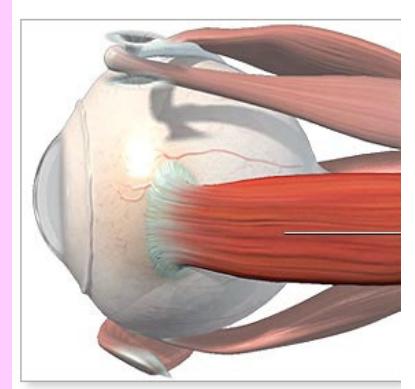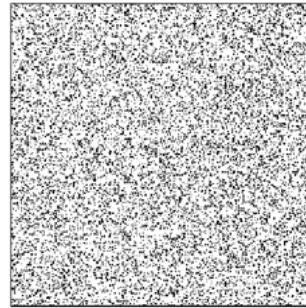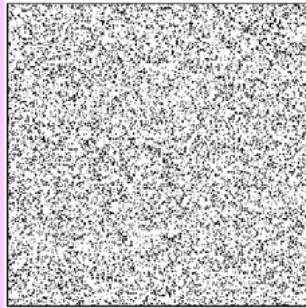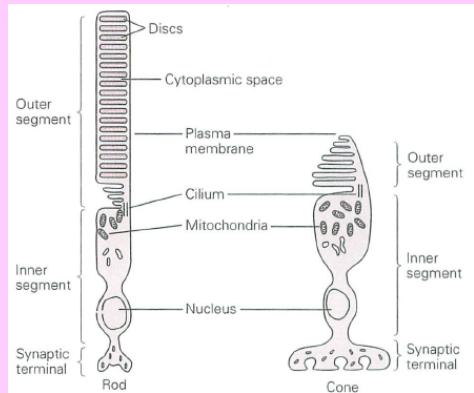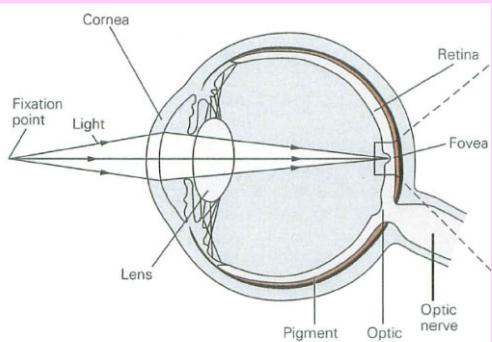


- 目の構造／Eye structure
- 目のセンサ／Eye sensors
- 奥行き知覚／Depth perception
- 眼球運動／Eye movement




# Eye movement

A 側面からみた図

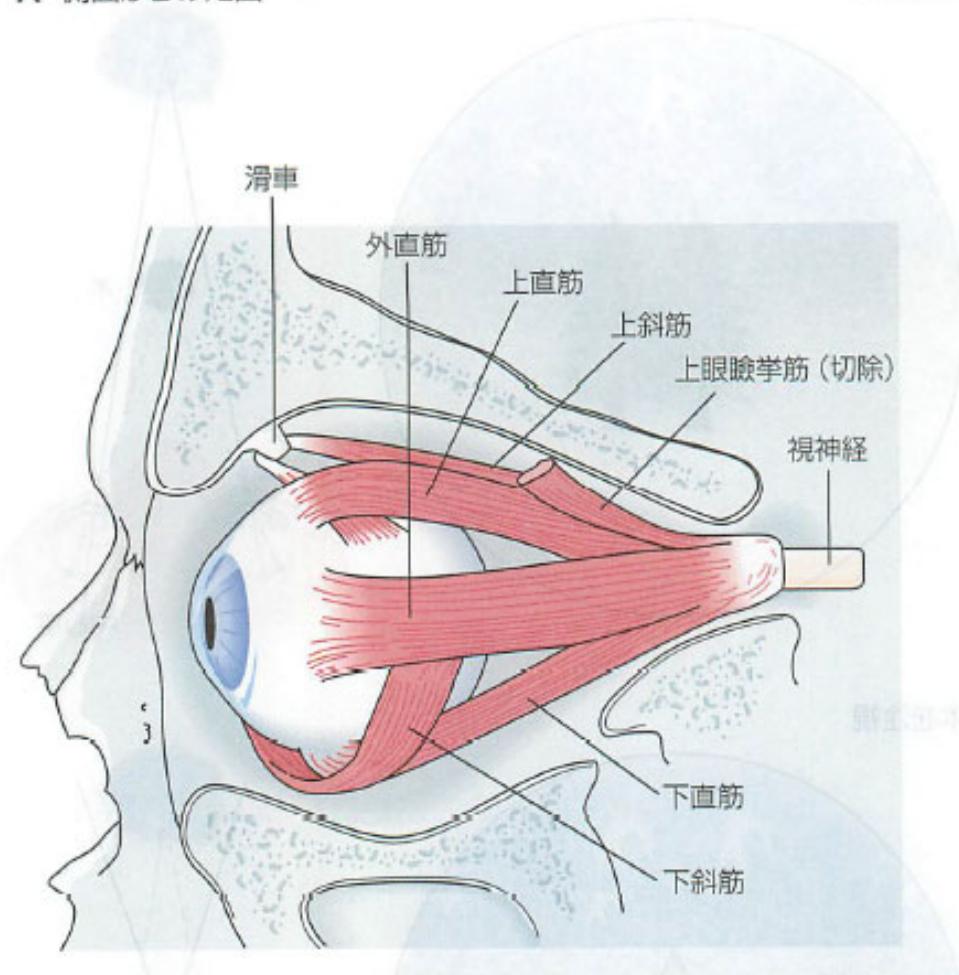

B 上方からみた図

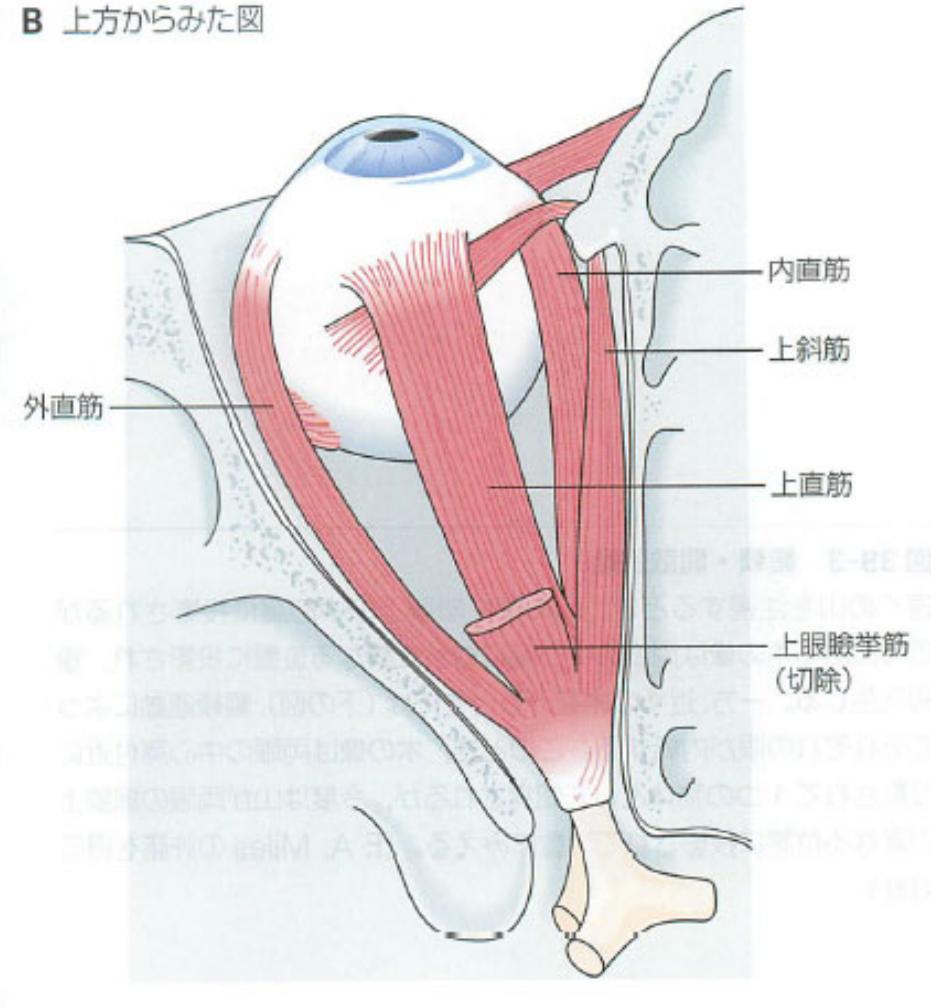


- 6 muscles (3 pairs) rotate eyes.


# Eye movement: 解析手段・入力手段として／For Analysis and as an Interface




<https://www.amazon.co.jp/dp/B079T13PZK>

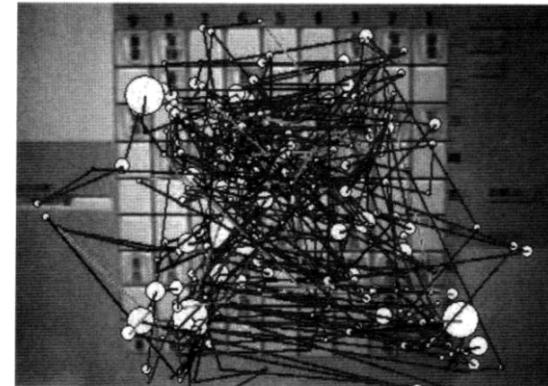

初級者の視線の動き

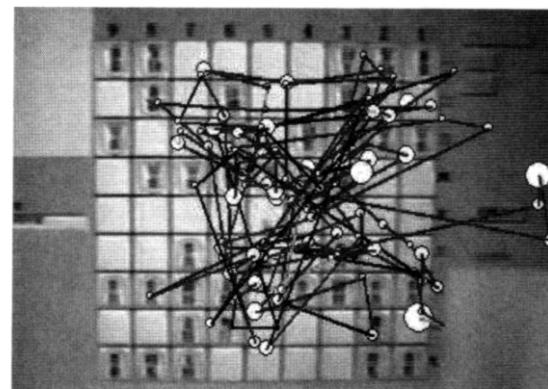

中級者の視線の動き

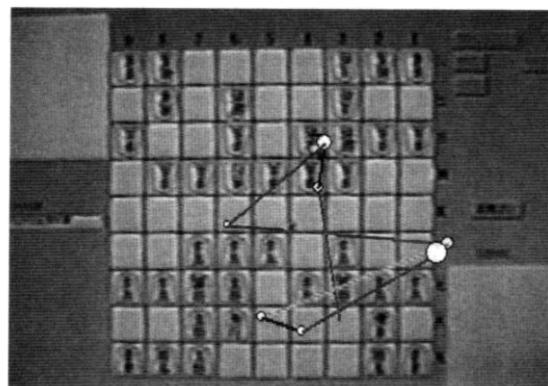


羽生さんの視線の動き



# (CHI2016) EyeSwipe: Dwell-free Text Entry Using Gaze Paths

Andrew T. N. Kurauchi, Wenxin Feng, Aijen D. Joshi, Carlos H. Morimoto, Margrit Betke

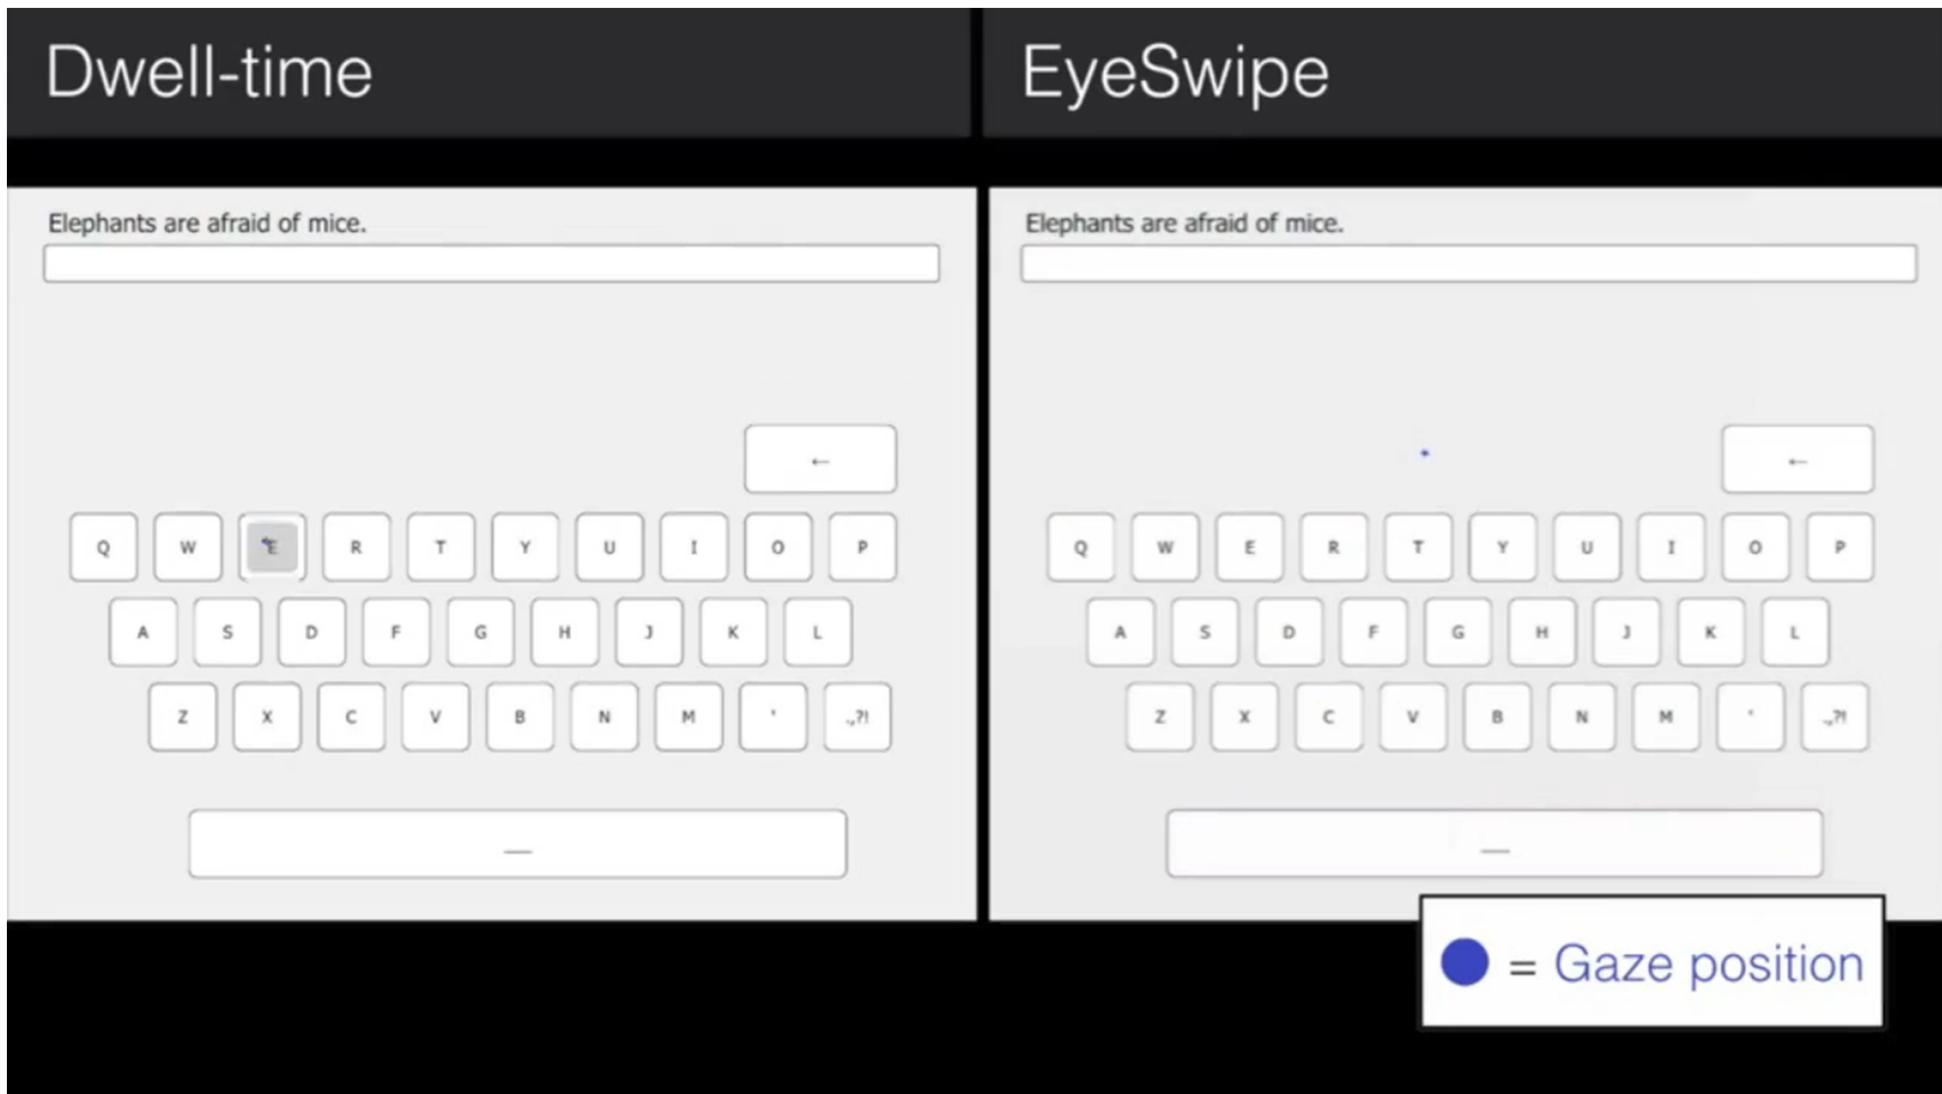


<https://www.youtube.com/watch?v=QpghYJwTMuc>

眼球運動によるキーボード入力. 単語の最初と最後の文字はしっかりと見る. 途中の文字は近傍をかするように見る. あとは登録単語辞書を使う



# How to measure Eye movement

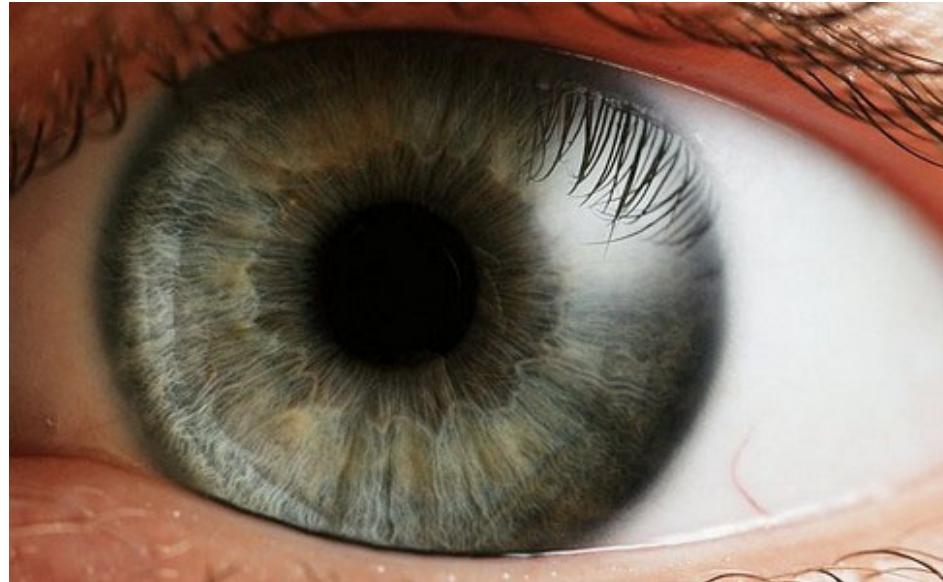


- アナログ測定／Analog measurement
  - コンタクトレンズ／Contact Lens
  - 眼底電位／Electrooculography
  - 強膜反射／Limbus Tracking Method
- 画像処理／Computer Vision
  - パッシブ・アクティブな方法／Passive・Active Methods





# カイモグラフ / Kymograph



<https://wellcomeimages.org/indexplus/images/L0057897.html>

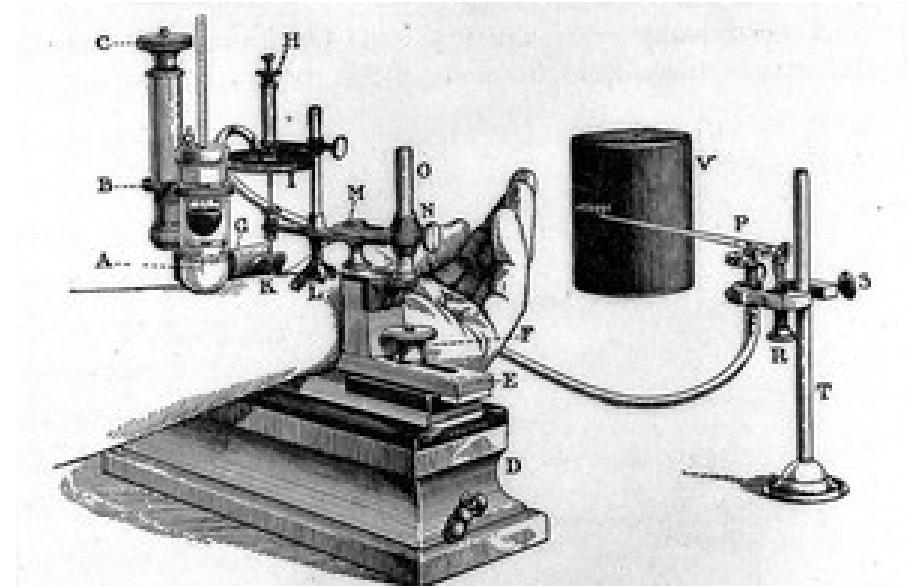

<https://wellcomecollection.org/works/fzn6j26r>

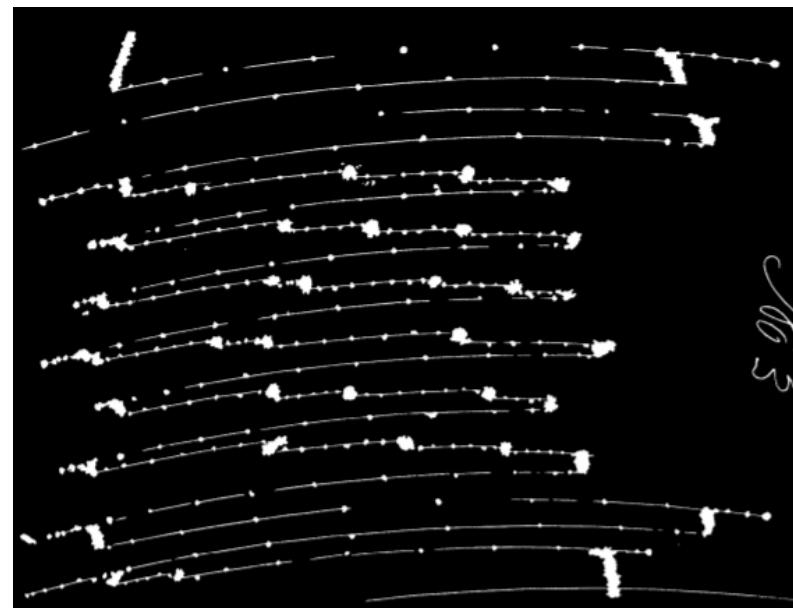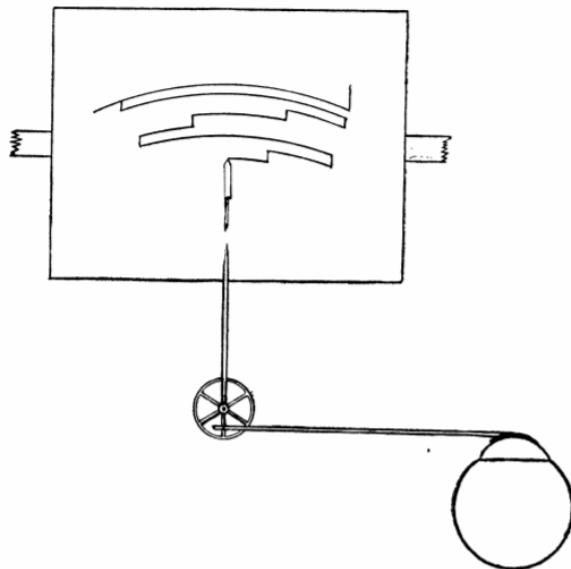


- Huey E B. "Preliminary experiments in the physiology and psychology of Reading" American Journal of Psychology. 1898;9:575–586.
- Huey E B. "On the psychology and physiology of reading. I" American Journal of Psychology. 1900;11:283–302.


- Recorded horizontal movement of the eye while reading.



# コンタクトレンズ／Contact Lens

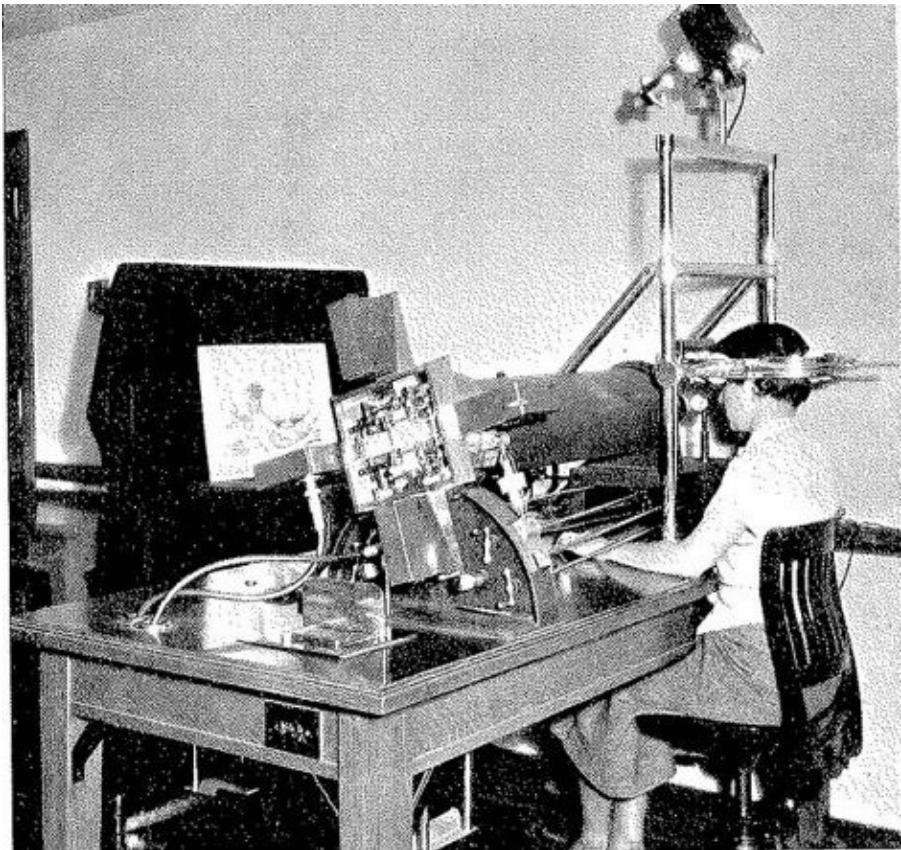

<https://medium.com/@eyeseel/eye-tracking-through-history-b2e5c7029443>

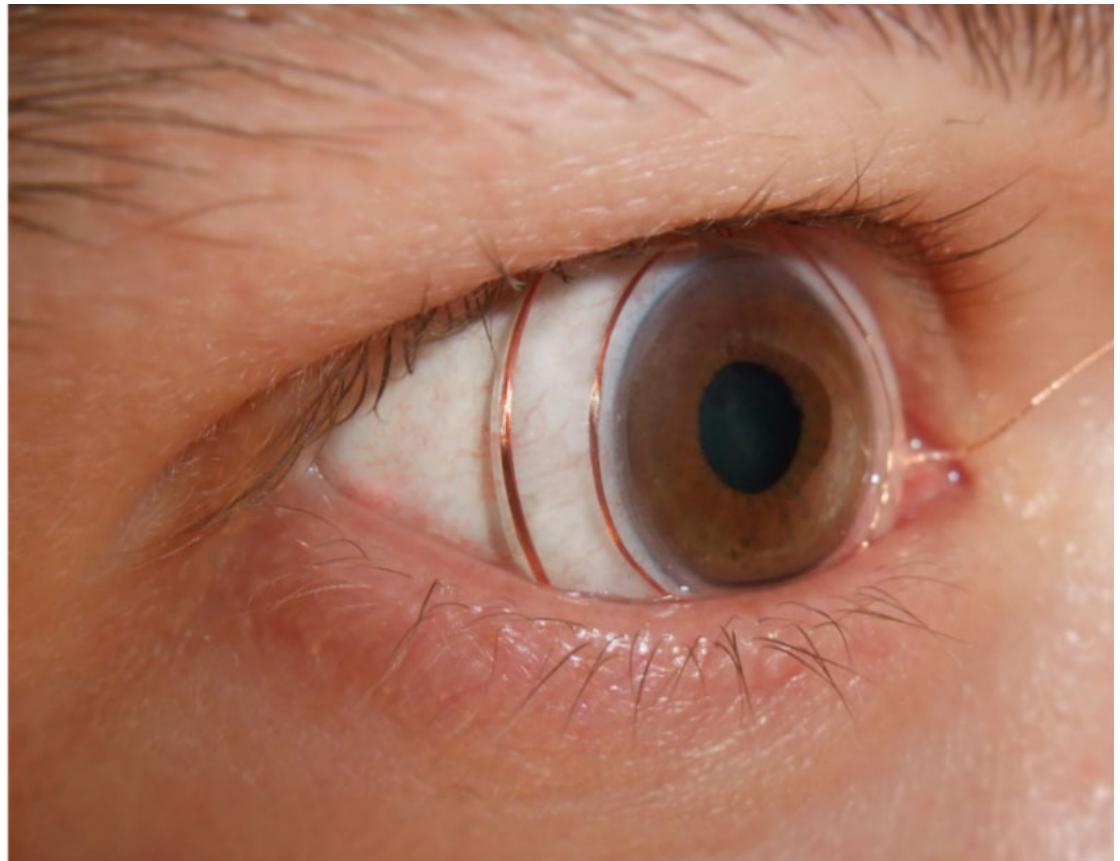


[https://www.chronos-vision.de/downloads/CV\\_Product\\_SSC.pdf](https://www.chronos-vision.de/downloads/CV_Product_SSC.pdf)

- オプティカル・レバー法: コンタクトレンズに微小ミラー装着  
Optical lever method using micro-mirror attached on contact lens.
- サーチコイル法: コンタクトレンズにコイルを埋込  
Search coil method using coil embedded in contact lens.



# (ISWC '16) Eric Whitmire et al. :EyeContact: Scleral Coil Eye Tracking for Virtual Reality

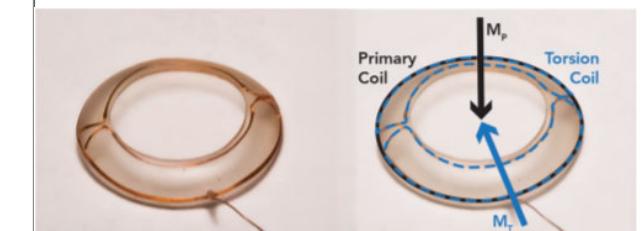



<https://www.youtube.com/watch?v=R8DG0alZymg>

[http://www.cs.cmu.edu/~ltrutoiu/pdfs/ISWC\\_2016\\_trutoiu.pdf](http://www.cs.cmu.edu/~ltrutoiu/pdfs/ISWC_2016_trutoiu.pdf)

Search coil method is embedded in HMD to achieve much higher tracking accuracy.





# 眼底電位 Electrooculography, EOG

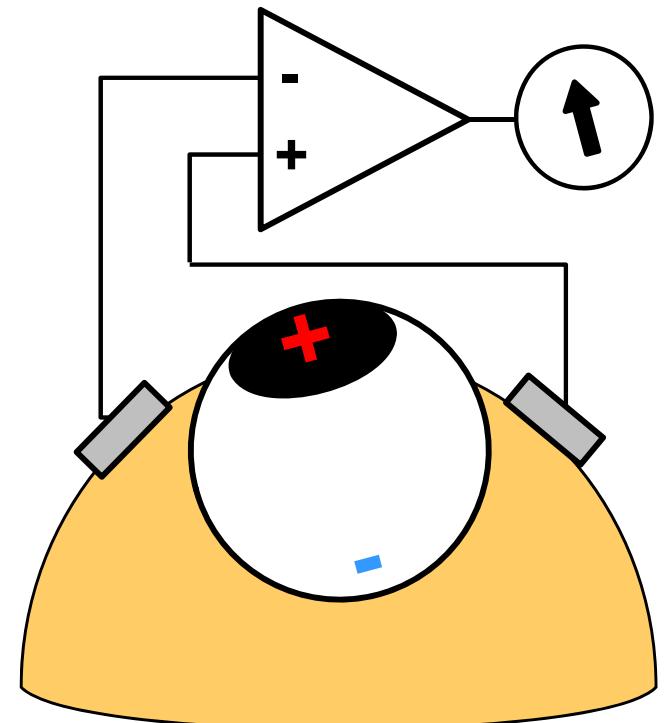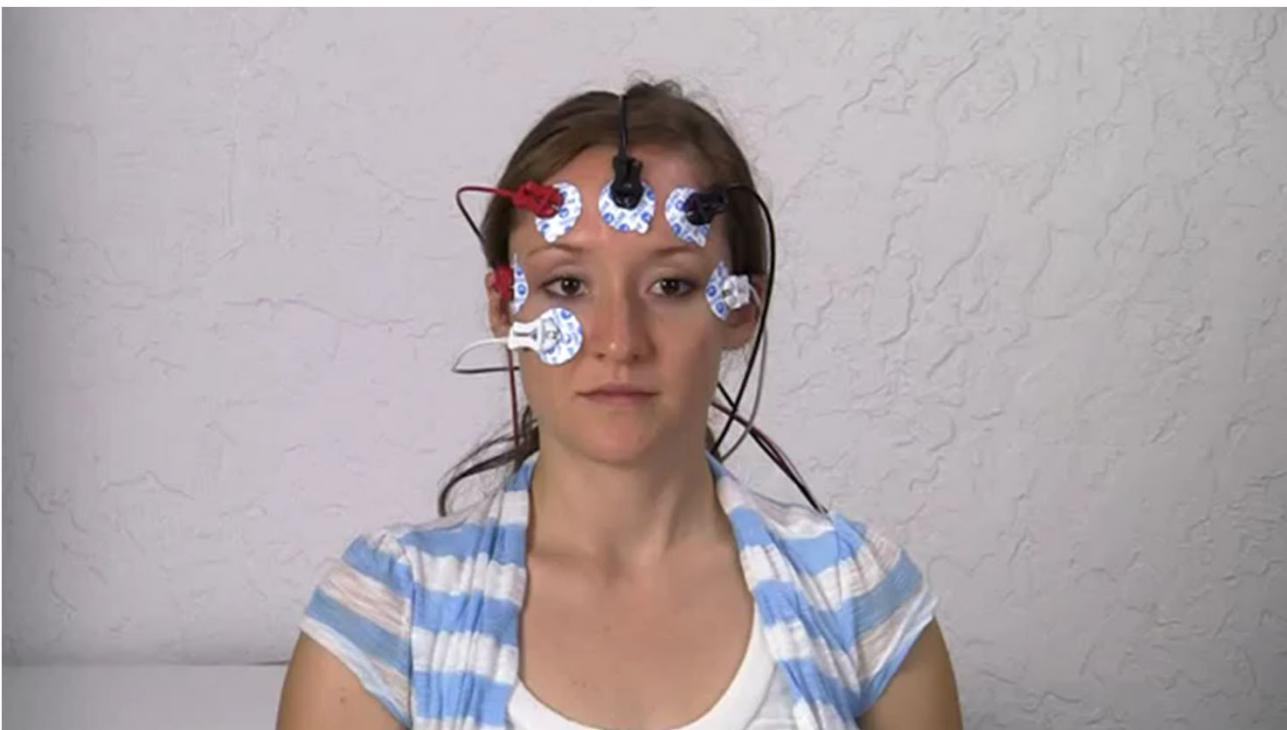

- <https://www.youtube.com/watch?v=-QXGiZBDkUw>
- Horny coat(角膜) has  $\sim 1\text{mV}$  positive voltage to Retina(網膜)
- Electrodes(電極) around eyes.  
⇒ Measured voltage is proportional to eye rotation.
- Has wide range (velocity, frequency)
- Accuracy not so good (1 deg~)
- Might be good method for HMD?




# 強膜反射／Limbus Tracking Method

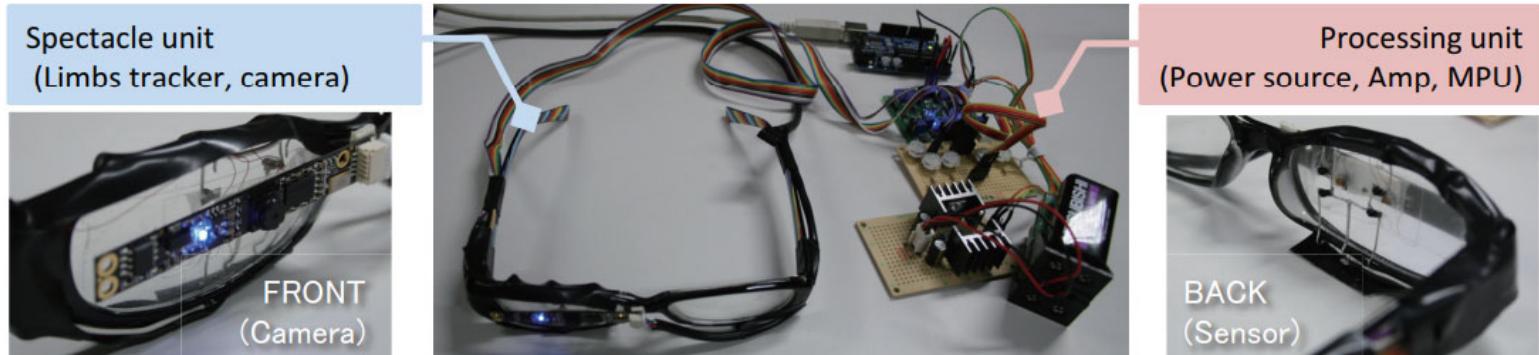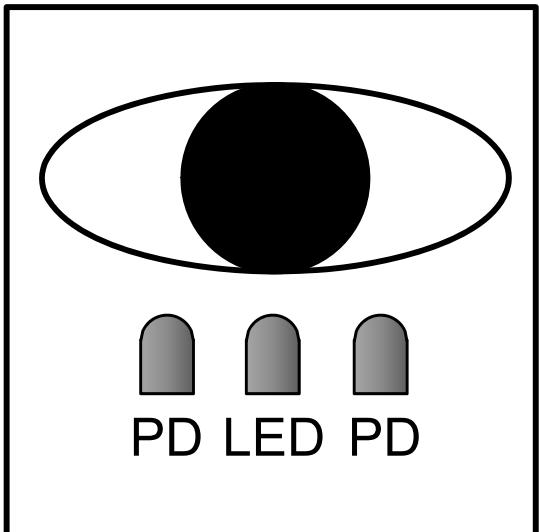

<https://lab.rekimoto.org/projects/aidedeyes/>

<https://vimeo.com/10351085>

Yoshio Ishiguro, Adiyan Mujibiya, Takashi Miyaki, Jun Rekimoto: Aided Eyes: Eye Activity Sensing for Daily Life (AH2010)

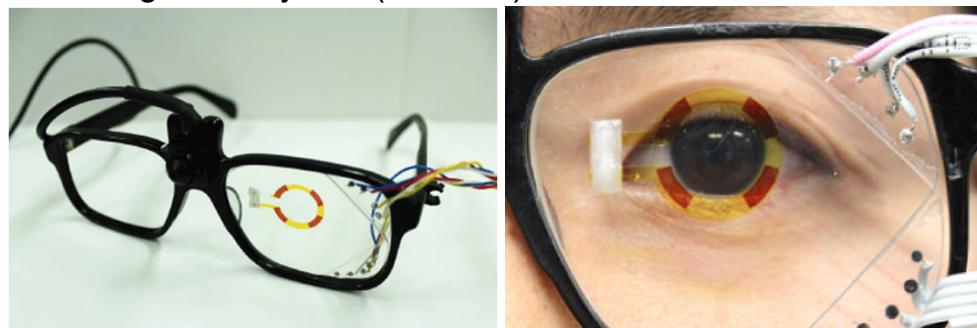


<http://www.miki.mech.keio.ac.jp/researchdetail/humaninterface/eyetracking/>

M. Ozawa, K. Sampei, C. Cortes, M. Ogawa, A. Oikawa, and N. Miki, "Wearable line-of-sight detection system using micro-fabricated transparent optical sensors on eyeglasses" Sensors and Actuators A: Physical, vol. 205, pp. 208-214, 2014.

- Emit IR light to the eye, measure reflected light.  
黒目と白目の境界に赤外線照射。反射光計測
- Received light: White part > Black part.
- Good for horizontal eye motion. Easy to make.



# Computer Vision

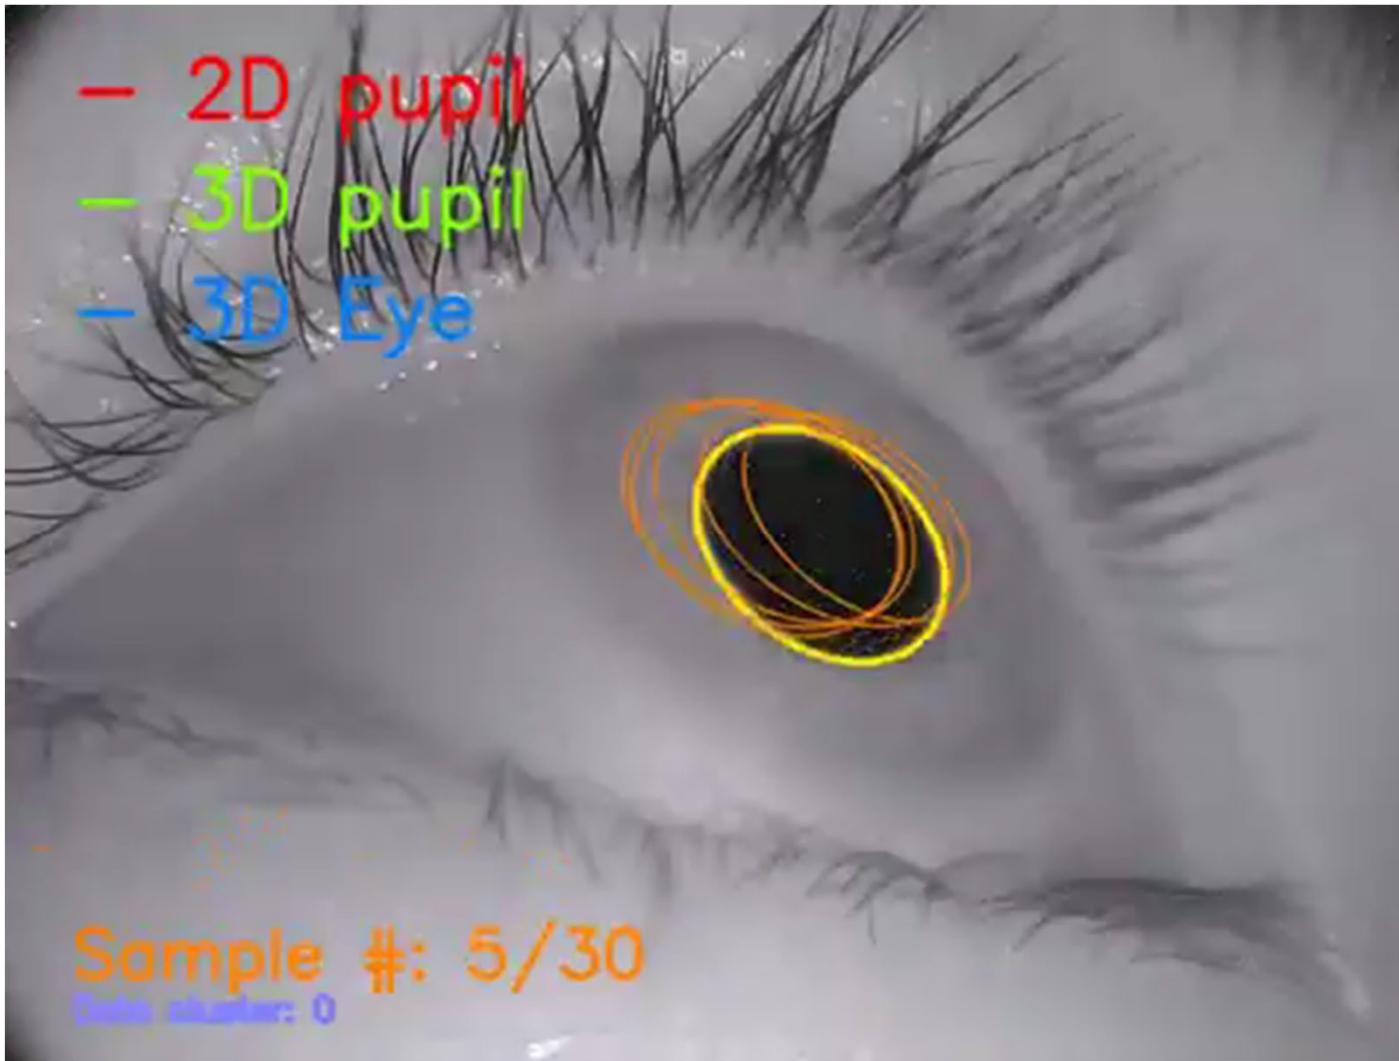


<https://www.youtube.com/watch?v=EH6UVQZgvJE>

- Capture eye image.
- By image processing (pattern matching), eye center is calculated.
- Refresh rate = video rate.



# 角膜反射／Reflection at Horned Coat

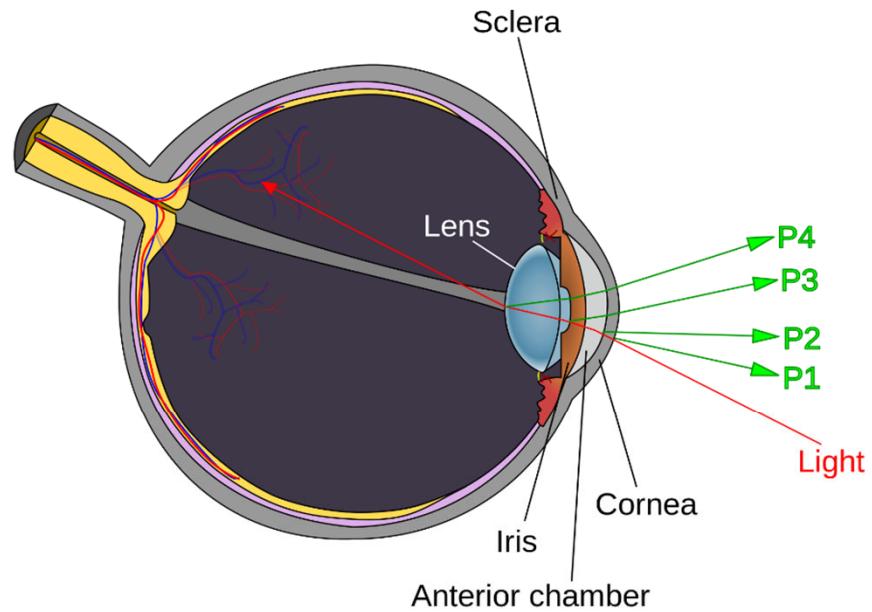

Purkinje images (Wikipedia)  
[https://en.wikipedia.org/wiki/Purkinje\\_images](https://en.wikipedia.org/wiki/Purkinje_images)



<https://www.youtube.com/watch?v=Rlhjd5rFANk>

- When illuminated with point light source, the horny coat gives typical reflectance image (Purkinje image), which can be used to monitor relative eye movement.
- 点光源の角膜照射時に現れる角膜反射像(プルキニ工像)から眼球運動を計測
- ビデオカメラで撮影→画像処理し、瞳孔中心との相対位置を取得できる。



# (発展)角膜反射像による環境情報取得 / Using reflection image at horny coat for environment recognition



K. Nishino, S. K. Nayar: Corneal Imaging System:  
Environment from Eyes, Int. J. Computer Vision 2006.

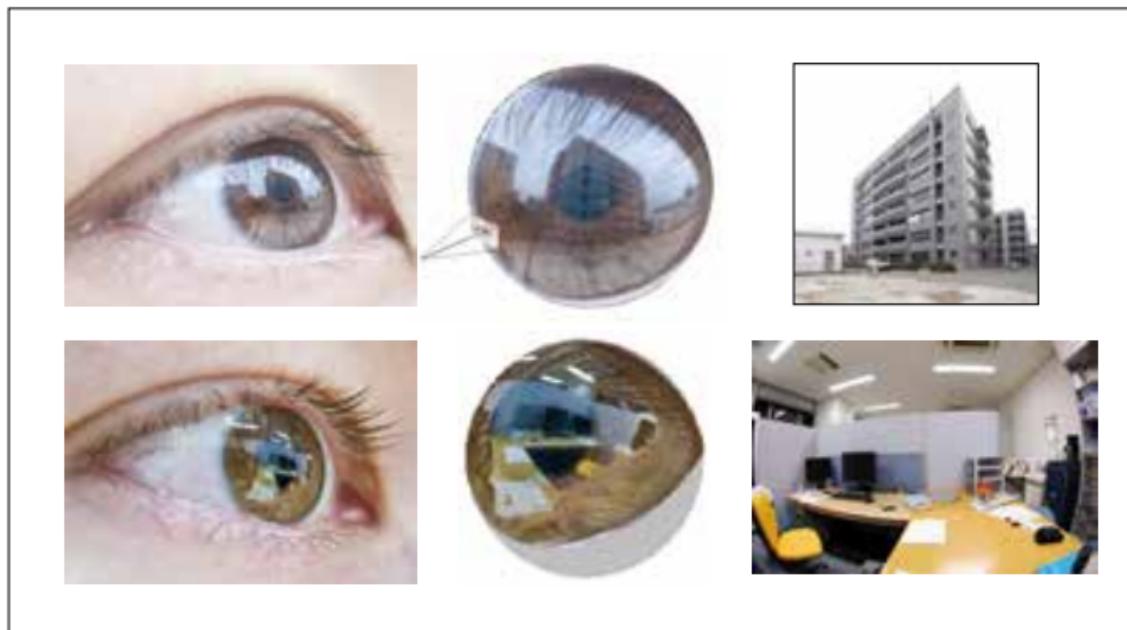


図1 角膜イメージング法によって得られたシーンの光線マップ  
左：角膜反射画像 中央：光線マップ 右：シーン画像

中澤篤志:角膜イメージング法による視覚推定とその将来展望

[https://www.jstage.jst.go.jp/article/tits/20/9/20\\_9\\_89/\\_pdf/-char/ja](https://www.jstage.jst.go.jp/article/tits/20/9/20_9_89/_pdf/-char/ja)

BBC | Sign in

News Sport Reel Worklife Travel Future More

## NEWS

Home Video World Asia UK Business Tech Science Stories Entertainment & Culture

Asia China India

Stalker 'found Japanese singer through reflection in her eyes'

© 10 October 2019

f e t m Share



Police say the stalker was able to locate his victim by zooming in on the reflection in her eyes

A Japanese man accused of stalking and sexually assaulting a young pop star told police he located her through the reflection in her eyes in a picture, according to local media reports.


<https://www.bbc.com/news/world-asia-50000234>

# 赤目現象の利用／Red-eye Effect



Red eye effect (Wikipedia)

[https://en.wikipedia.org/wiki/Red-eye\\_effect](https://en.wikipedia.org/wiki/Red-eye_effect)

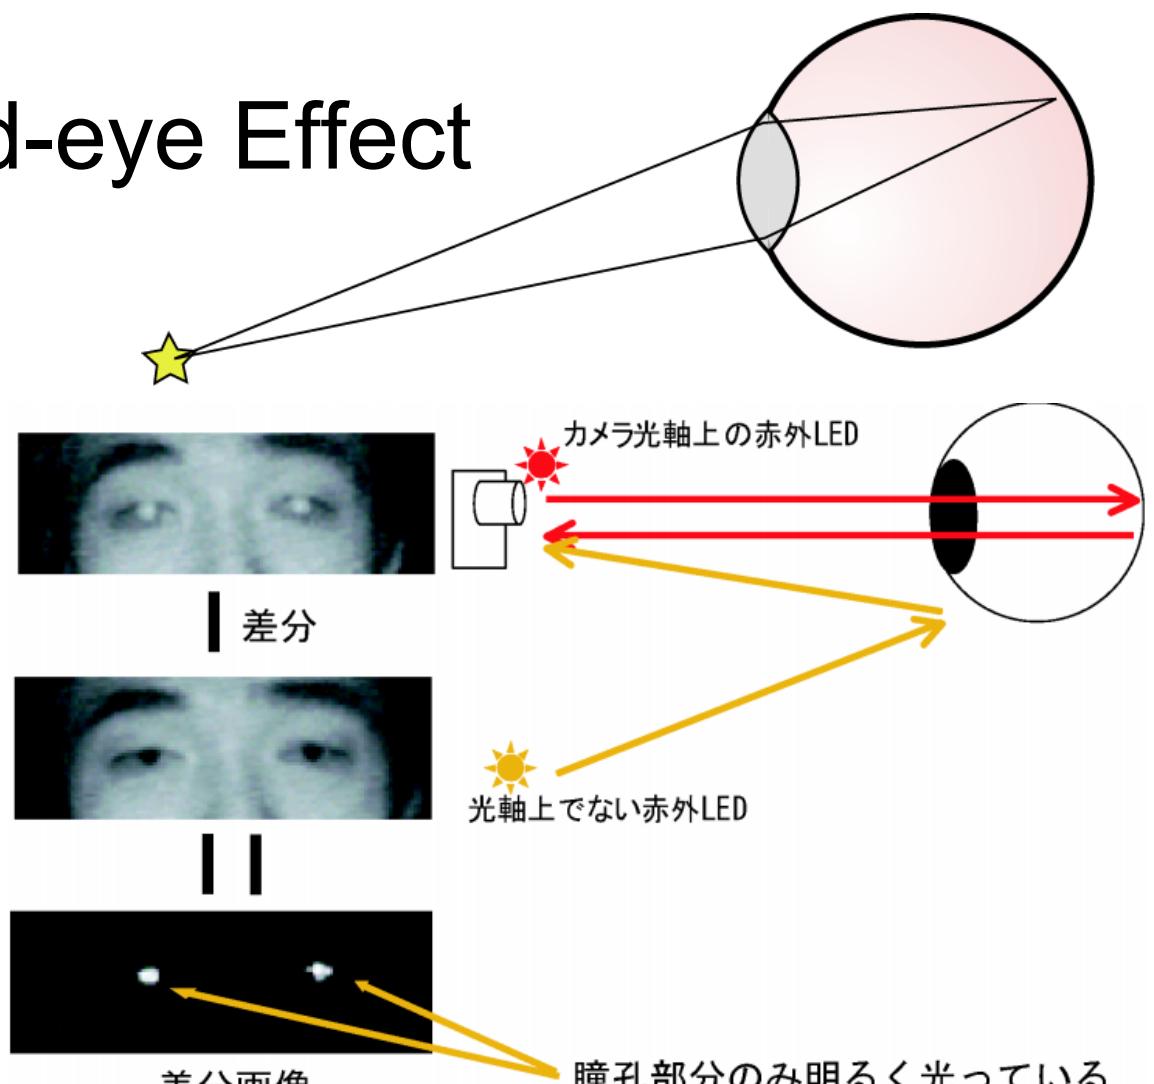



渡邊, 安藤, 関口, 前田, 舘: 網膜再帰反射を利用した遠隔サッカード検出手法の研究、TVRSJ2004.

[https://www.jstage.jst.go.jp/article/tvrsj/9/1/9\\_KJ00007553951/\\_pdf](https://www.jstage.jst.go.jp/article/tvrsj/9/1/9_KJ00007553951/_pdf)


- 目のレンズによる再帰性反射で網膜の色(血管)が反射する現象. 光源に返る
- 光源を2種類(同軸上か否か)用意すれば差分画像として瞳孔だけ検出可能
- Red-eye effect (=retroreflection by eye lens) can be used to extract eye pupils by taking two pictures; one with concentric light and one with surrounding light.

# 眼球運動の種類／Eye movements

- スムーズパースート(滑動性眼球運動)  
**Smooth Pursuit**
  - Follow slow movement of small dots.  
Voluntary (conscious)
- サッケード(跳躍性(衝動性)眼球運動)  
**Saccade**  
Stepwise movement
  - Motion start is voluntary and involuntary.
  - During motion,
    - You cannot stop (involuntary)
    - Visual acuity drops.
- 固視微動  
**Miniature eye movement**
  - Very small vibration. 30~100Hz.
  - Refresh the image on the retina.
    - Anesthetization of muscles⇒No visual image.

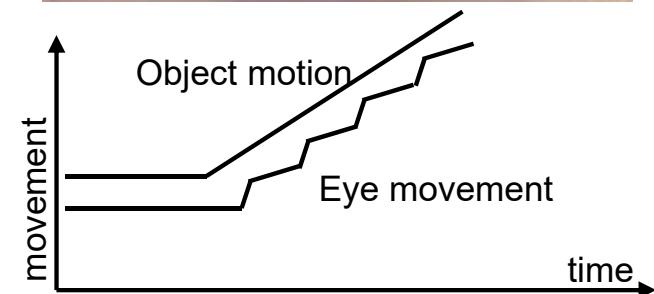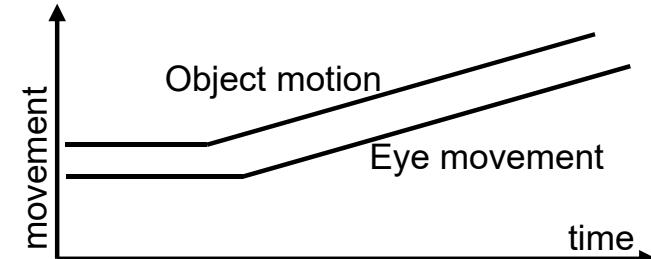

# 眼球運動の種類／Eye movements

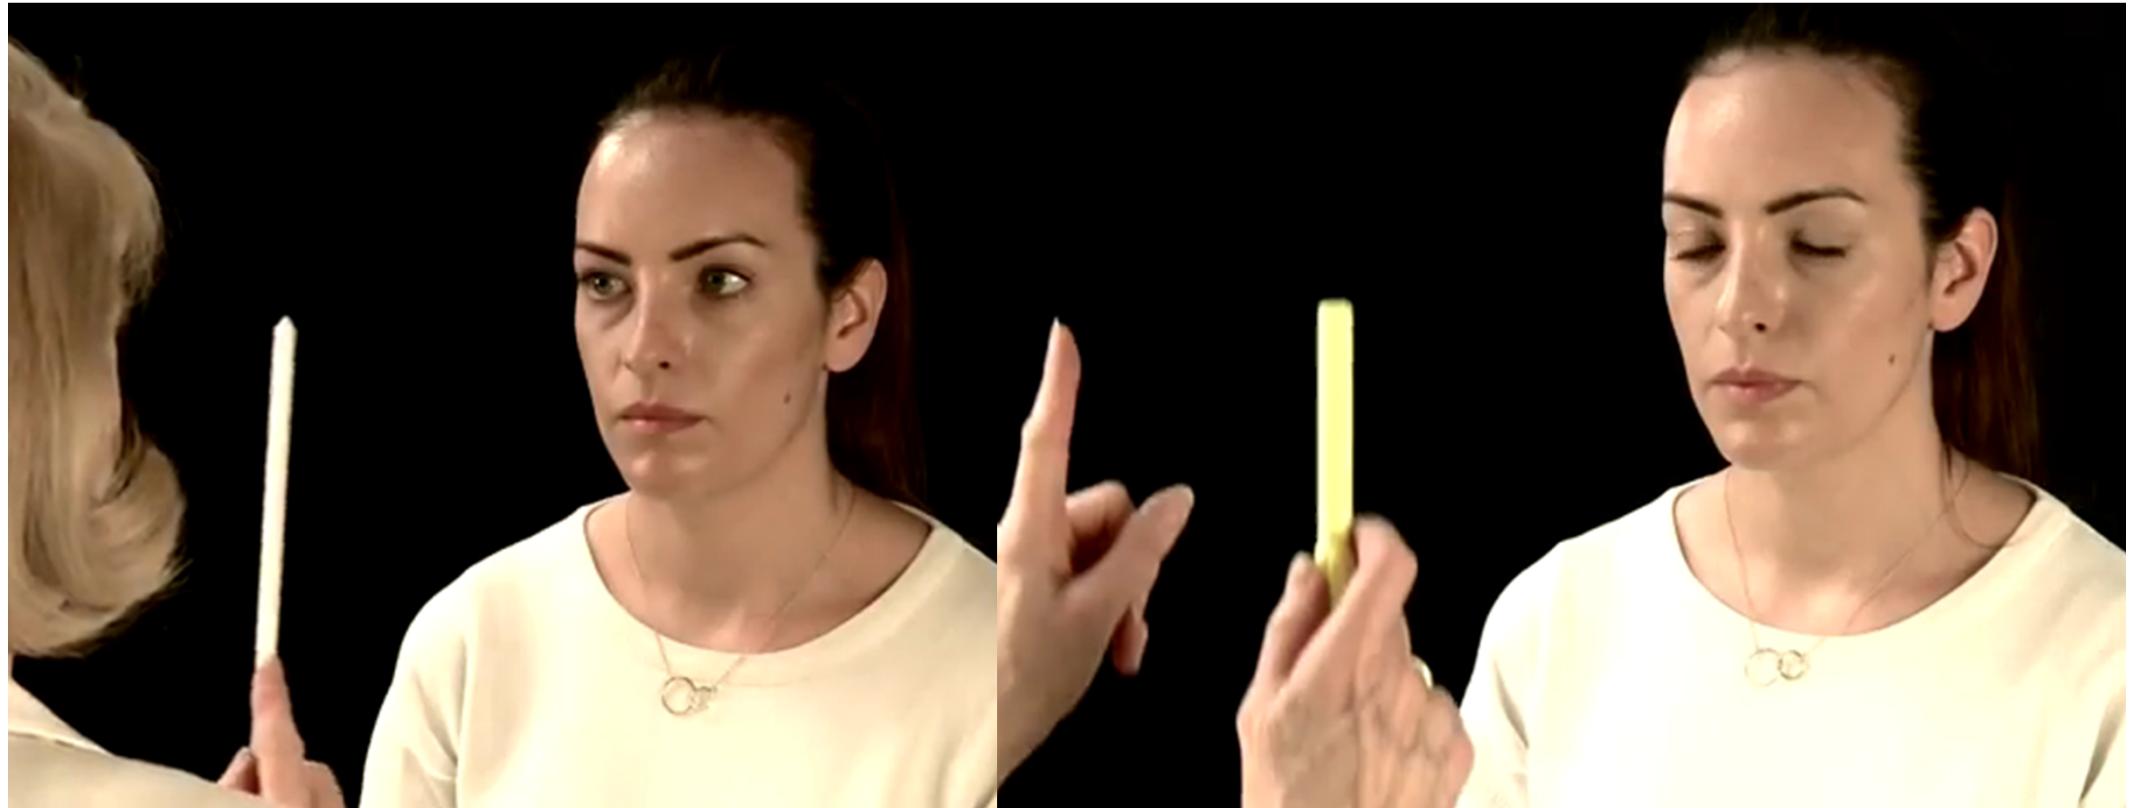

**Smooth Pursuit**

<https://www.youtube.com/watch?v=w9l-IZbX1NI>

**Saccade**

[https://www.youtube.com/watch?v=D\\_y56PQvZZA](https://www.youtube.com/watch?v=D_y56PQvZZA)



# 安定化のための反射としての眼球運動


## Eye movement for stabilization




<https://www.youtube.com/watch?v=UA0rJFS6KQU>  
Assessment - Cranial Nerves - Vestibulo-Ocular Reflex




<https://www.youtube.com/watch?v=LInm9cZcHyk>  
Optokinetic Nystagmus

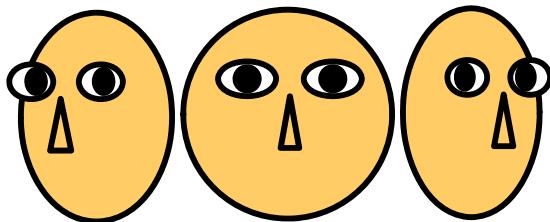

- 前庭動眼反射／Vestibulo-ocular reflex(VOR)
  - Cancels head rotation.
- 視運動性眼球運動／Optokinetic Response(OKR)
  - When the whole visual field moves, the eye follows.

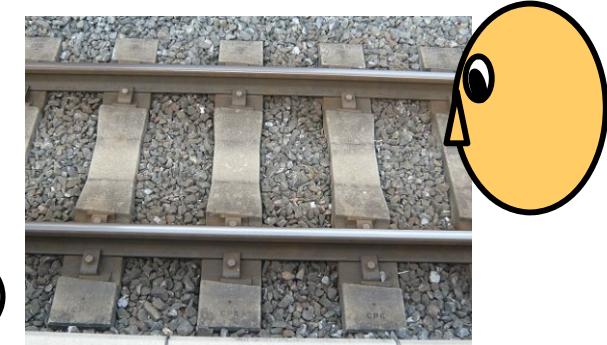

参考:Chicken Head Tracking - Smarter Every Day


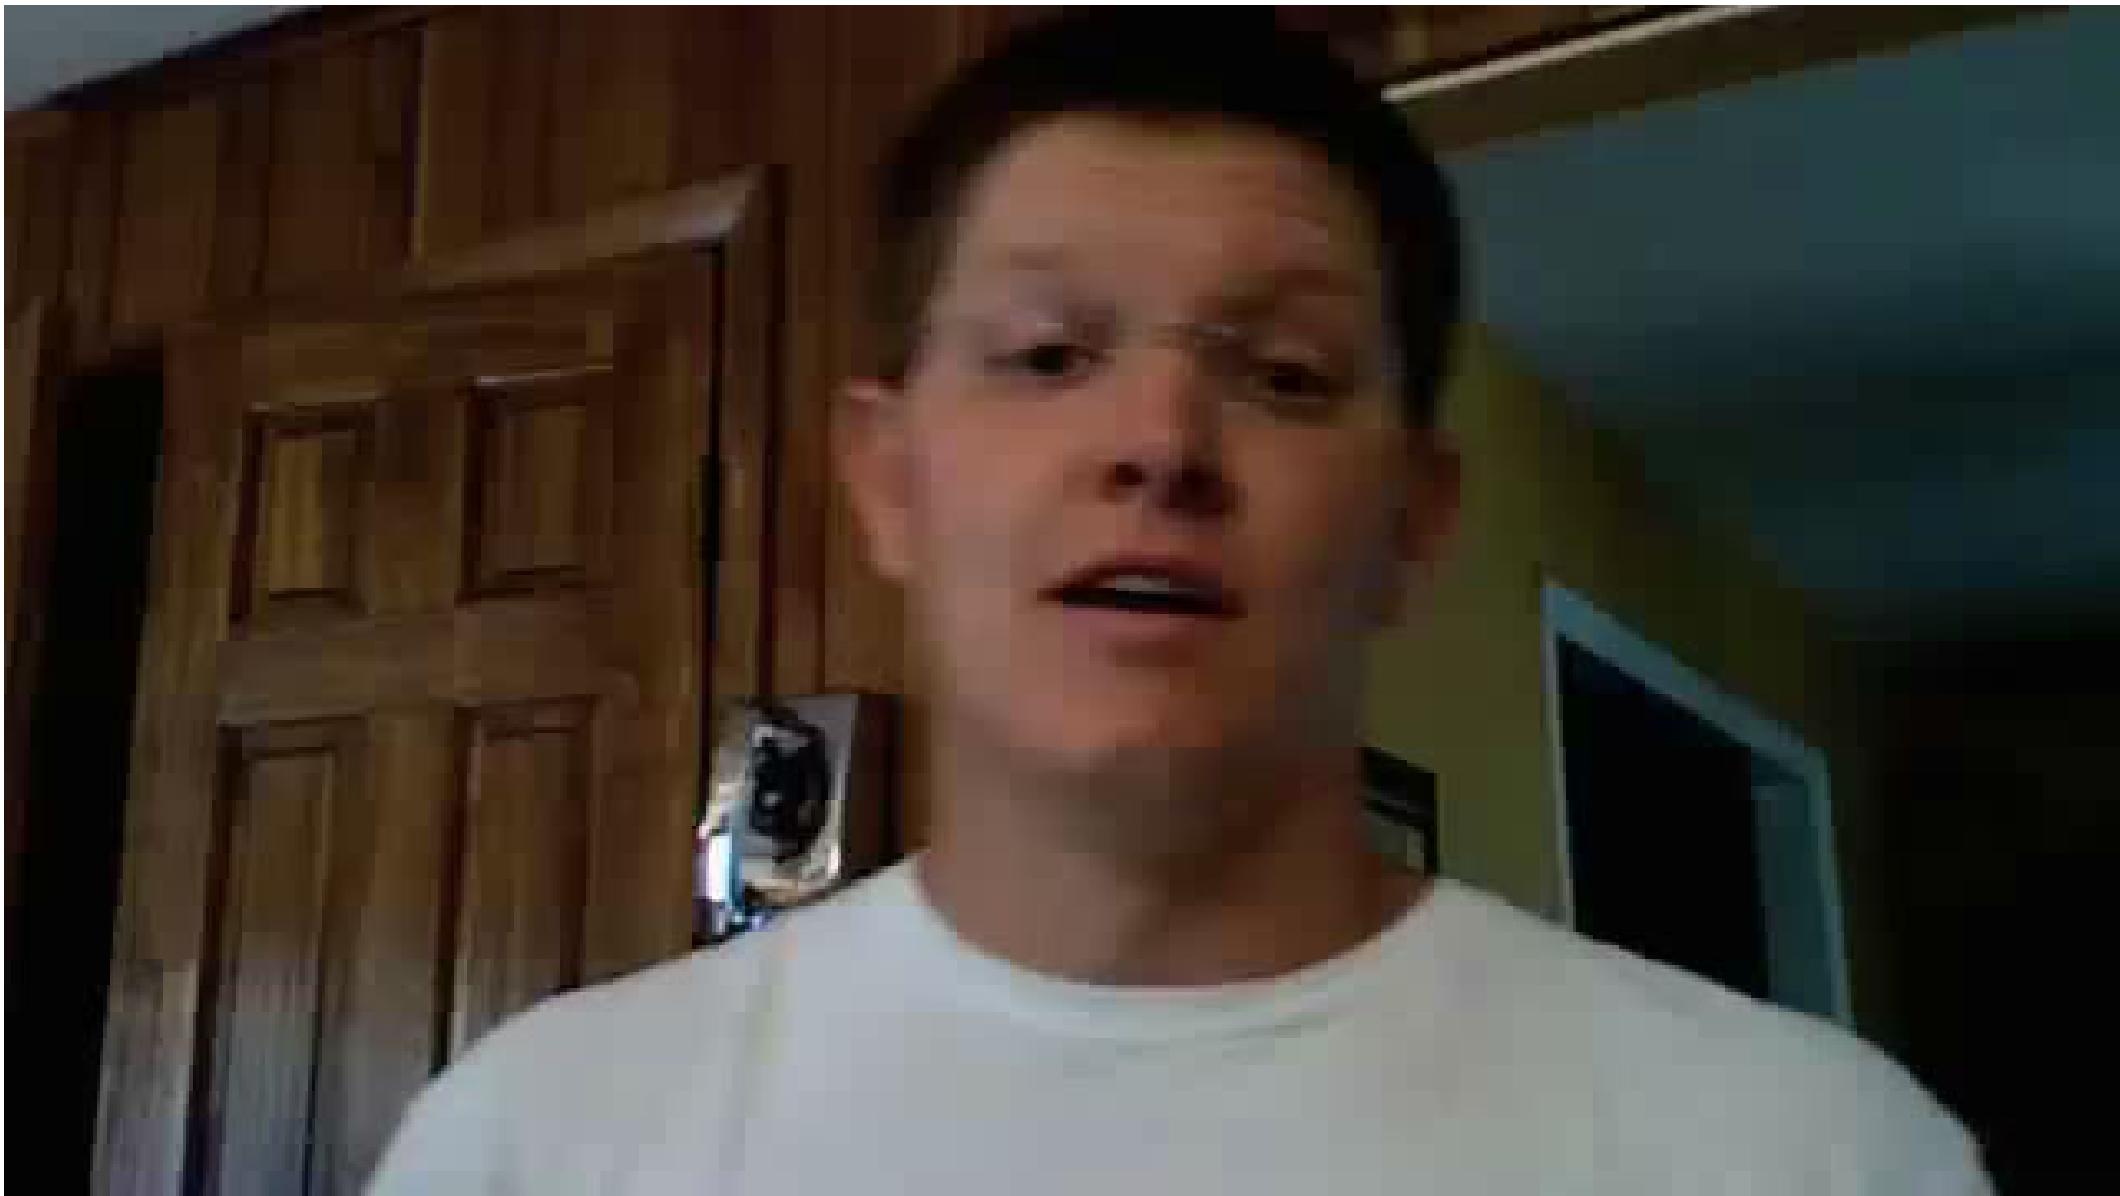


[http://www.youtube.com/watch?v=\\_dPlkFPowCc](http://www.youtube.com/watch?v=_dPlkFPowCc)



# TODAY's SUMMARY

- 眼の構造／Eye structure
  - cornea, retina, fovea, blind spot
- 眼のセンサ／Eye sensors
  - rod cell, cone cell, color vision
  - peripheral & central vision
  - image processing
- 奥行き知覚／Depth perception
  - accommodation, vergence
  - binocular disparity
- 眼球運動／Eye movement
  - smooth pursuit, saccade,
  - VOR, OKR

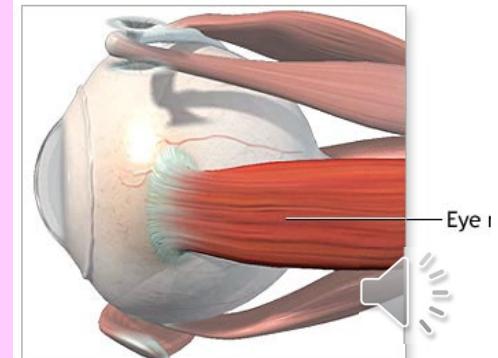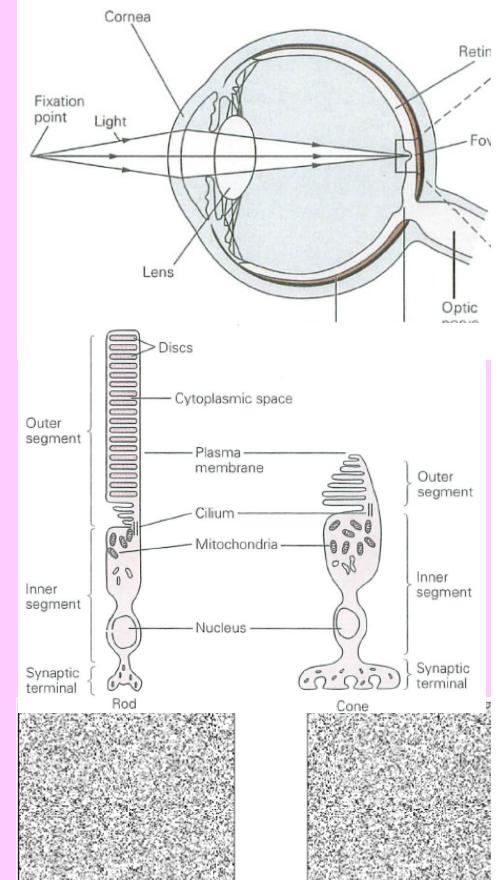

# 小テスト／Mini Test 次回開始までに提出

<https://forms.gle/NiDH9z323CBLnDZe9>

以下の全てに100字以内程度で解答せよ／Answer all questions within 50 words

1. ウエバー・フェヒナーの法則について説明せよ Explain Weber-Fechner's law
2. 調整法について説明せよ Explain the method of adjustment.
3. 極限法について説明せよ Explain the method of limit.
4. 恒常法について説明せよ Explain the method of constant.
5. 錐体細胞と桿体細胞の分布の違いについて述べよ Describe difference of distribution of cone cell and rod cell.
6. 錐体細胞と桿体細胞の明暗および色感受性の違いについて述べよ Describe difference of color and brightness perception of cone cell and rod cell.
7. 焦点調節について説明せよ Explain Accommodation
8. 運動視差について説明せよ Explain Motion Parallax
9. 輻輳について説明せよ Explain Vergence Eye Movement
10. 輻輳調節矛盾について説明せよ Explain Vergence-Accommodation Conflict
11. 両眼視差について説明せよ Explain Binocular Disparity
12. 前庭動眼反射について説明せよ Explain Vestibulo-ocular reflex(VOR)
13. 視運動性眼球運動について説明せよ Explain Optokinetic Response(OKR)  
眼底電位計測について説明せよ Explain Electroculography (EOG)
14. 強膜反射法について説明せよ Explain Limbus Tracking Method
15. 角膜反射法について説明せよ Explain Eye Capture System Using Reflection at Horn Coat

